

Developing a Sustainable Pavement Management Strategy for Resurfacing Low Volume Roads in New Brunswick

Shawn Landers, MSc.Eng., P.Eng. (Corresponding Author)
Opus International Consultants Limited
80 Bishop Drive, Fredericton, New Brunswick
Canada, E3C 1B2

Don Mason, MSc.Eng, P.Eng.
New Brunswick Department of Transportation and Infrastructure
440 Kings Place, Fredericton, New Brunswick
Canada, E3B 5H1

John MacNaughton, BSc.
Opus International Consultants Limited
80 Bishop Drive, Fredericton, New Brunswick
Canada, E3C 1B2

Submission Date: December 15, 2014

Word Count: 4427

ABSTRACT

The New Brunswick Department of Transportation and Infrastructure is responsible for the rehabilitation and maintenance of approximately 19,650 km of highways and roads. Nearly 85 percent of this network is paved, including 9680 km of low volume highways and roads. Maintaining this network at an acceptable standard requires a significant investment that has become increasingly challenging given current economic and fiscal constraints. Since available funding needs to be directed towards higher priority projects, the rehabilitation costs for low volume roads is escalating as they often require full or partial reconstruction by the time they are treated due to the extent of deterioration. In response, the Department undertook a study to develop a sustainable pavement management strategy to ensure that the most appropriate surface type is selected in the future for each road. The process, which will become part of the Department's Asset Management Program, was to be based on clearly defined and transparent level of service criteria that considered engineering suitability, least life-cycle cost, and functional / service characteristics. The study included a review of existing practices and policies from other jurisdictions, an assessment of key factors to be considered, and the development of a multi-staged, screening decision making framework. Implementing the strategy would result in the conversion of a significant portion of existing low volume asphalt surfaced roads to treated surfaces with an estimated reduction of \$4.6 to \$6.3 million annually in rehabilitation costs, and place the province in a much stronger position for achieving infrastructure sustainability.

INTRODUCTION

The New Brunswick Department of Transportation and Infrastructure (NBDTI) is responsible for the continual rehabilitation and maintenance of approximately 19,650 km of provincially designated highways and roads. As shown in Table 1, approximately 84% of the highway network are paved with either an asphalt or chipseal surface. This includes over 9680 kilometers that have a local classification and are typically low volume roads.

TABLE 1: NBDTI Road Network by Surface Type in Kilometers

Road Class	Asphalt	Chip Seal	Gravel	Total
Arterial Highways	2,900	0	0	2,900
Collector Highways	2,400	750	0	3,150
Local Numbered Highways	880	2,160	250	3,290
Local Named Roads	420	6,360	2,900	9,680
Ramps, Scales, etc.	630	0	0	630
Totals	7,230	9,270	3,150	19,650

Maintaining the provincial highway network at an acceptable standard requires a significant investment that has become increasingly challenging given the reality of current economic and fiscal constraints. With available funding needing to be directed towards higher priority projects, the rehabilitation costs for low volume roads is escalating as they often require full or partial reconstruction by the time they are treated due to the extent of deterioration.

Ensuring the future sustainability of the existing road network is critical and in response, the Department undertook a study to develop a sustainable pavement management strategy to ensure that the most appropriate surface type is selected for each road. The strategy needed to be

based on clearly defined and transparent criteria that consider engineering suitability, least life-cycle cost, and functional / service characteristics (e.g. traffic levels, truck volumes, economic significance, land use, etc.). The study included a review of existing practices and policies from other jurisdictions, an assessment of key factors to be considered, and the development of a multi-staged, screening decision making framework. Implementing the new pavement management strategy would result in the conversion of a significant portion of existing low volume asphalt surfaced roads to chipseal surfaces.

CURRENT PRACTICES REVIEW

A review was undertaken of current practices, policies, and frameworks used by other highway agencies for selecting road surface. The review encompassed both a web-based literature review and survey of Canadian provincial highway agencies. The literature review was a high level web-based search focused on identifying factors and associated criteria used for selecting road surface type. The survey was focused on whether, and to what extent formalized criteria and / or policies exist with the following provinces contacted: British Columbia, Alberta, Saskatchewan, Manitoba, Ontario, Nova Scotia, Newfoundland and Prince Edward Island. Tables 2 to 4 present an overview of the current practices used by various provincial agencies for selecting road surface type.

TABLE 2: Overview of Current Canadian Practices for Selecting Road Surface Type

Province	Policy	Factors	Criteria	Framework Followed
Newfoundland & Labrador	No	<ul style="list-style-type: none"> • Traffic volumes • Road Class • Public Support 	No	Each road is assessed on a case by case basis using engineering judgement.
Prince Edward Island	No	<ul style="list-style-type: none"> • Traffic volumes 	No	Each road is assessed on a case by case basis using engineering judgement.
Nova Scotia	Yes	<ul style="list-style-type: none"> • Traffic Volumes • Roadside Development 	Yes	Weighting methodology
Ontario	Northern Region	<ul style="list-style-type: none"> • Traffic Volumes • Road Class 	Yes	Weighting methodology
Manitoba	No	<ul style="list-style-type: none"> • Traffic Volumes • Road Class 	Some	Each road is assessed on a case by case basis using engineering judgement.
Saskatchewan	Yes	<ul style="list-style-type: none"> • Traffic Volumes • Truck Traffic 	Yes	Volume threshold as per Policy 310-04
Alberta	No	<ul style="list-style-type: none"> • Traffic Volumes • Public Support 	No	Each road is assessed on a case by case basis using engineering judgement.
British Columbia	Yes	<ul style="list-style-type: none"> • Traffic Volumes • Road Class 	Yes	Volume threshold

Of the eight agencies contacted, Nova Scotia and Northern Ontario were found to have the most comprehensive policies and frameworks in place. Both of these jurisdictions employ a weighting methodology that incorporates multiple factors to select the appropriate road surface type. Saskatchewan and British Columbia both have volume thresholds which serve as a guide for when a given road is a candidate for various surface treatments. In all remaining agencies, road surface type is selected on a case-by-case basis.

In the United States, state agencies are typically responsible for major highways, while secondary and tertiary roads tend to be the responsibility of local or regional authorities, meaning that there are few state-wide policies related to the selection of road surface treatment. South Dakota, Minnesota, and Ohio were identified as having more comprehensive policies.

TABLE 3: Traffic Criteria for Road Surfacing (Selected Agencies)

Agency / Source	Traffic Volume Criteria
Nova Scotia	<ul style="list-style-type: none"> • Unless road development dictates otherwise: AADT<300 = gravel, AADT 300-500 = double chip seal and AADT>500 = asphalt
Manitoba	<ul style="list-style-type: none"> • All Primary Arterials are asphalt or concrete • Secondary Arterials: AADT<500 = surface treatment (chip seal); AADT>500 = asphalt or concrete • Collectors: AADT 300-1000 = surface treatment (chip seal); AADT>1000 = asphalt or concrete
Saskatchewan	<ul style="list-style-type: none"> • Primary Roads: AADTT > 50 trucks/day = asphalt; • Secondary Roads: AADTT > 75 trucks/day = asphalt; AADT 200-300 = gravel
Ontario	<ul style="list-style-type: none"> • Arterials and Freeways: Hot mix asphalt • Secondary Highways: AADT <200 = gravel; AADT 200-1000 = surface treated; AADT 1000-1500 = cold mixed asphalt; AADT > 1500 = hot mix asphalt
British Columbia	<ul style="list-style-type: none"> • Graded Aggregate Sealcoats: SADT = 1,500 to 4,000; Asphalt: SADT > 4000; Chip Seal: not permitted on any roads
South Dakota	<ul style="list-style-type: none"> • Gravel: <150 vpd; Surface treated: 150-660 vpd; Hot mix asphalt: >660 vpd
Ohio	<ul style="list-style-type: none"> • Chip seal only permitted on routes < 2,500 AADT
Minnesota	<ul style="list-style-type: none"> • Paved surface should be considered when ADT >200 vpd
Missouri Cole County	<ul style="list-style-type: none"> • ADT must be greater than 125 vpd for roads to be paved
National Park Service	<ul style="list-style-type: none"> • Roads with ADT > 400 should be paved
Kentucky Transportation Center	<ul style="list-style-type: none"> • Minimum ADT to justify paving ranges from 50 to 400 vpd • Types of traffic should also be considered

TABLE 4: Additional Criteria for Road Surfacing (Selected Agencies)

Factor	Agency / Source
Agency costs	• Northern Ontario, South Dakota, FHWA Context Sensitive Roadway Surfacing Guide
Road Functional Classification	• British Columbia, Ontario, Manitoba, Saskatchewan, Newfoundland & Labrador, Kentucky
Urban / Rural Setting	• FHWA Context Sensitive Roadway Surfacing Guide
Climate	• FHWA Context Sensitive Roadway Surfacing Guide
Impact on Nearby Residents	• Northern Ontario, Nova Scotia
Impact on Local Businesses	• Northern Ontario, Nova Scotia
Impact on Long Distance Travel	• Northern Ontario, Nova Scotia
Urban / Rural Setting	• FHWA Context Sensitive Roadway Surfacing Guide

Key findings from the literature review and agency survey regarding criteria used in the selection of road surface treatment included:

- Most agencies do not have comprehensive guidelines for selecting road surface type; rather decisions are made on a case by case basis;
- The majority of road surfacing policies only consider low volume roads;
- Traffic volume is the predominant screening factor considered by other agencies when selecting road surface treatment;
- Other screening factors commonly considered include agency costs, functional purpose, rural / urban setting, and impact on local business and long distance travel; and
- Some international agencies conduct detailed benefit-cost assessments for each surfacing project that take into account the full extent of road user costs.

A brief overview of established frameworks currently employed by selected highway agencies is summarized in Table 5.

IDENTIFICATION OF POTENTIAL FACTORS

Based on the review of current agency practices and literature, the most common factors used for selecting road surface treatments can be broadly grouped into the following categories:

- a) Traffic Volumes - roads with the highest usage should provide the best level of service to minimize road user costs;
- b) Commercial Traffic - heavy vehicles cause the most significant damage to roads requiring additional strength to minimize damage to the road surface;
- c) Road Function - roads with a higher functional classification are generally expected to have a higher standard of surface treatment
- d) Adjacent Land Use / Development - road users tend to have greater expectations regarding road surfaces located in urban environments, gravel roads (which produce dust) and chip seal roads (which can result in flying stones) are generally less acceptable in densely populated areas and roads that service significant tourist destinations, recreational areas, or scenic routes should also have a higher surface quality; and
- e) Agency Costs - an evaluation of agency costs is necessary to ensure that long term life cycle costs are optimized.

TABLE 5: Identified Selection Frameworks

Agency	Framework Description
Nova Scotia	<ul style="list-style-type: none"> • Low Volume Road Surface Evaluation Program policy. • Local roads with a traffic volume of less than 500 vehicles per day. • Incorporates traffic volume and roadside development scoring process. • Spreadsheet tool developed.
Ontario	<ul style="list-style-type: none"> • Developed for low volume roads in the northern part of the Province • Incorporates traffic, impact on local residents, impact on local business, impacts on long distance travel and agency costs. • Delphi Technique used to assign weights to each of these screening factors and scoring assigned based on site specific characteristics.
South Dakota	<ul style="list-style-type: none"> • Initiated a research study in 2002 to investigate. • Developed macro-driven Excel-based spreadsheet that allows staff to compare the costs associated with various roads surface types (i.e. hot-mix asphalt, blotter, gravel, stabilized gravel) to determine which type is most economical under a specific set of circumstances. • Tool also allows for consideration of non-economic factors that are more subjective and difficult to quantify such as political factors, growth rates, housing concentration, mail routes, and truck traffic.
World Bank	<ul style="list-style-type: none"> • Developed guidelines to assist countries in selecting the appropriate surface type for current unsealed roads. • Framework assesses the demand for a paved surface using a scoring methodology that takes into account physical factors, climate / soil, traffic demand, dust forming and community impacts with surfacing options identified and evaluated against the site specific conditions for construction and maintenance, physical / social environment and surface performance. • Each factor assessed qualitatively and those options identified as being the most suitable short-listed for further evaluation. • Financial (least life cycle cost) and economic comparison of all shortlisted alternatives is undertaken to identify the most cost-effective surface type.

An assessment was completed for each data category including the rationale for including each factor in New Brunswick's road surface selection framework as well as assess data availability for potential evaluation measures. The results are summarized in Table 6.

Workshops were held to examine the factors in terms of applicability, benefits, data availability, coverage, and objectivity. It was agreed that all factors need to be considered, however it was also recognized that there is some inherent overlap between some factors and this needed to be taken into consideration when formalizing the framework. The existing frameworks were also assessed and while each framework had its own unique and attractive features, none represented the ideal solution for NBDTI due largely to data collection requirements.

TALE 6: Assessment of Potential Factors

Factor	Potential Measure	Data Availability
Traffic Volumes	Average Annual Daily Traffic (AADT)	<ul style="list-style-type: none"> • NBDTI count program for all arterial, collector and local numbered highways. • Limited data available for local named roads.
Commercial Traffic	Average Annual Daily Truck Traffic (AADTT)	<ul style="list-style-type: none"> • Regular traffic monitoring program only collects truck volumes at the 38 permanent count locations. • Sporadic data available for several locations where truck counts have been undertaken by special request.
	Designated Truck Routing	<ul style="list-style-type: none"> • No designated truck network. • List of routes where trucks are not permitted.
	Presence of a commercial traffic generator (e.g. mill, woodlot, etc.)	<ul style="list-style-type: none"> • Requires site specific assessment.
Road Functional Classification	Functional Classification	<ul style="list-style-type: none"> • Each designated road in the NBDTI network is classified as arterial, collector, numbered local, and named local. • Classification information is available in spatial format.
	Posted Speed	<ul style="list-style-type: none"> • Available for all arterials and collectors on Road Life Studies.
Land Use Development	Presence of year-round dwellings	<ul style="list-style-type: none"> • Requires site specific assessment.
	# of roadside accesses and residences per km	<ul style="list-style-type: none"> • Requires site specific assessment.
	Significant Tourism Route	<ul style="list-style-type: none"> • Requires site specific assessment.
	Urban versus Rural	<ul style="list-style-type: none"> • Requires site specific assessment.
Agency Costs	Least Life Cycle Cost	<ul style="list-style-type: none"> • Requires site specific assessment of construction and maintenance costs.

A key outcome from the workshops was the identification of the following guiding principles to help define the vision and provide the context and scope for NBDTI's framework in terms of how it would be implemented:

- Be based on a simple approach focused on initial screening;
- Be objective and quantifiable (rather than subjective);
- Not require significant data collection;
- Consider agency life cycle costs;
- Capture site specific requirements;
- Be definitive with some limited flexibility; and
- Allow for an upfront evaluation.

SELECTION FRAMEWORK

The framework is intended to provide a fair, objective, consistent, and transparent process for selecting the appropriate surface type for a given road. This framework utilizes a two-staged approach that first applies a set of initial screening criteria to establish a preliminary recommendation as to whether the road should have an asphalt, chip seal, or gravel surface. The recommended surface type may then be upgraded only if warranted by certain site specific characteristics.

Stage 1 - Initial Screening Criteria

The initial screening criteria for selecting the appropriate road surface type is based on functional classification, traffic volumes, and daily truck volumes as detailed in Table 7. The thresholds for these factors (see Figure 1 below) were selected by applying least lifecycle costing for the surface types.

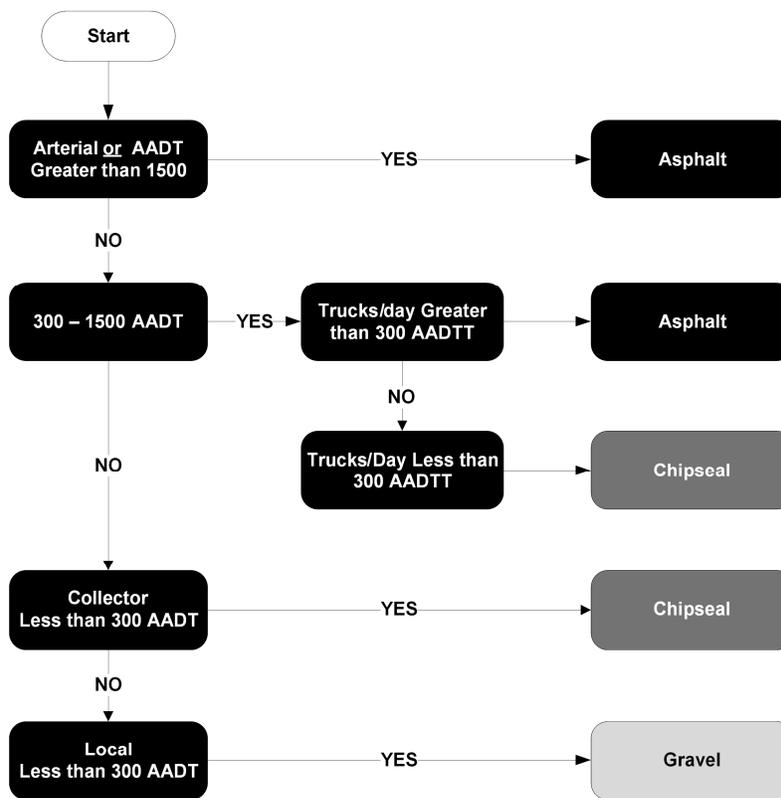


Figure 1: Initial Screen Criteria Decision Key

TABLE 7: Framework – Initial Screening

Factor	Definition / Rational	Data Source
Functional Classification	Arterial Highways - provide a continuous, integrated highway network for long distance intra and inter provincial travel and provide primarily a traffic mobility function. Collector Highways - intra provincial travel, integrated network throughout developed areas and direct access to major resource areas and smaller towns / villages. Locals Highways - provide direct access to individual land uses and link with arterials and collectors to form an integrated highway network which reflects a balance between land accessibility and traffic mobility.	NBDTI Functional Classification System
	Roads serving the greatest functional purpose are generally expected to have a higher standard of surface treatment.	
Daily Traffic	The average number of vehicles travelling on a given section of road each day: <ul style="list-style-type: none"> • Average annual daily traffic (AADT); or • Average daily traffic during the peak month (MADT) if highly seasonal traffic fluctuations. 	NBDTI Traffic Flow Map and site specific counts where required
	Roads with the highest usage should provide the best level of service to minimize road user costs.	
Daily Truck Volumes	The average number of trucks (or other heavy vehicles) travelling on a given section of road each day: <ul style="list-style-type: none"> • Average annual daily truck traffic (AADTT); or • Average daily truck traffic during the peak month (MADTT) if highly seasonal traffic fluctuations. 	NBDTI Traffic Flow Map and site specific counts where required
	While passenger vehicles represent the majority of users on the provincial road network, heavy vehicles result in the most substantial damage to a road's surface. Consequently, roads with high volumes of trucks and other heavy vehicles require additional strength to prevent accelerated surface damage.	

Stage 2 - Site Specific Screening Criteria

The preliminary surface type recommendation identified using the initial screening criteria may be upgraded to higher surface standard if warranted by certain site specific characteristics. These characteristics vary by functional classification and are to be viewed as “the exception to the rule”. Table 8 outlines the site specific screening criteria for Collector and Local Highways and Named Roads.

TABLE 8: Initial Screen Criteria Thresholds

Road Class	Criteria
Arterial Highways	Does not apply
Collector Highways	<p>A chipseal surfaced road may be upgraded to asphalt wherever one or more of the following conditions exist:</p> <ul style="list-style-type: none"> • A grade of 7% or more is present that would result in construction stability issues; or • The existing pavement structure would result in a lower life-cycle cost for paving (e.g. locations with significant depths of asphalt where the cost of pulverization would offset the savings offered by surface treatment).
Local Highways and Named Roads	<p>A chipseal surfaced road may be upgraded to asphalt wherever one or more of the following conditions exist:</p> <ul style="list-style-type: none"> • A grade of 7% or more is present that would result in construction stability issues; or • The existing pavement structure would result in a lower life-cycle cost for paving (e.g. locations with significant depths of asphalt where the cost of pulverization would offset the savings offered by surface treatment). <p>A gravel surface road may be upgraded to a chipseal surface wherever one or more of the following conditions exist:</p> <ul style="list-style-type: none"> • The road serves as a through road connecting two other provincially designated highways; or • The road provides direct access to a significant tourist destination.

EVALUATION OF PROPOSED METHDOLOGY

An estimate of the potential cost savings of implementing the proposed road surfacing strategy by applying the initial screening criteria over the existing road network was completed. The sensitivity of the traffic and truck volume thresholds was also evaluated where sufficient data was available.

The greatest potential cost savings of the proposed road surfacing strategy are most likely to result from the conversion of existing asphalt roads to a chip seal surface. Since it is the Department's intention that all arterial highways will continue to have an asphalt surface, low volume collector and local highways represent the best candidates for conversion.

NBDTI collects traffic data on all collector and local numbered highways. Table 9 depicts the respective proportions of these roads which currently have an asphalt surface and an AADT of less than 1000, 1500, and 2000 vehicles per day. As shown, nearly 30% of all existing asphalt collector and local numbered highways have an AADT of less than 1000. Since limited traffic count data was available for local named roads, the proportion of these roads having an asphalt surface and an AADT of less than 1000 vehicles per day was estimated based on the experience and local knowledge of District staff.

TABLE 9: Breakdown of Low Volume Collector and Local Numbered Highways

Road Class	Total Asphalt km	AADT < 1000	AADT < 1500	AADT < 2000
Collector Highways	2,400	580 (24%)	905 (38%)	1215 (51%)
Local Numbered Highways	885	365 (41%)	540 (61%)	645 (75%)
Totals	3,285	945 (29%)	1,145 (35%)	1,860 (57%)

Road Class	Criteria	Total Asphalt Km	Km > 400 Trucks per Day
Collector Highways	Less than 1000 veh/day	580	145 (25%)
Local Numbered Highways	Less than 1000 veh/day	365	80 (22%)
Local Named Roads	Less than 1000 veh/day & > 1 Km	130	30 (23%)
Totals		1,075	255 (24%)

NBDTI collects limited truck count data outside of the arterial highway network. Consequently, prior to evaluating the proposed road surfacing strategy a dataset was prepared with the assistance of Department staff to identify those roads which they believe carry an average of more than 400 trucks per day during the peak season.

The potential cost savings of implementing the proposed surfacing strategy was estimated by applying the initial screening criteria over the existing road network. The following assumptions were also made to simplify the analysis:

- Given the limited data available for existing gravel and low volume chip seal roads, the evaluation only considered the conversion between an asphalt and chip seal surface. However, it is recognized that converting between these two surface types will have by far the greatest cost implications;
- AADT and truck traffic were taken from the most recent available NBDTI count data and supplemented with the estimates provided by District staff; and
- Arterial highways were not included in the evaluation since they will all continue to have asphalt surface if the proposed strategy is implemented.

Based on these assumptions, approximately 800 km of existing asphalt surface roads (13%) that would be considered candidates for conversion to chip seal under the proposed surfacing strategy. Using the same criteria, the number of existing chip seal roads that would be candidates for conversion to asphalt was also estimated for collector and local numbered roads based on the following additional assumptions:

- On collector and local numbered highways where traffic data was not available, it was assumed that the AADT was less than 1000 vehicles per day;
- 2.5% of all local named roads have an AADT > 1000 vehicles per day (i.e. half of the percentage for local numbered roads);
- Trucks volumes on all existing chip seal roads are less than 400 trucks per day.

These are all considered to be valid assumptions based on knowledge of NBDTI's functional classification criteria and traffic monitoring program. The results from this analysis indicated

nearly 400 km of existing chip seal roads would be potential candidates for conversion to asphalt under the proposed strategy. It should also be noted that the candidate sections of road for conversion indicated were identified by applying the initial screening criteria only. Actual numbers may be slightly impacted by certain site specific criteria. Furthermore, traffic volumes used in the screening were based on estimated values only in many instances (as opposed to actual counts) and would therefore be subject to field verification.

ESTIMATED REHABILITATION SAVINGS

Based on the application of the initial screening criteria; implementing the proposed surfacing strategy is expected to result in:

- 880 km of existing asphalt roads being candidates for conversion to chip seal; and
- 400 km of existing chip seal roads being candidates for conversion to asphalt.

This scenario has the potential to reduce rehabilitation costs by an estimated \$92 million over a 20 year analysis period, or \$4.6 million annually. These cost reductions were derived from a life-cycle costing analysis undertaken over a 20 year period and based on the following assumptions:

- Asphalt surfaces would have a 20 year life cycle for low volume roads and therefore require one rehabilitation cycle during the analysis period at a cost of \$300,000/km; and
- Chip seal surfaces would have a 12 year life cycle and therefore require two cycles of rehabilitation during the analysis period at total cost of \$110,000/km.

A sensitivity analysis was also conducted to estimate the potential impact of increasing the traffic volume threshold in the initial screening criteria from 1,000 to 1,500 vehicles per day. This would result in an additional 250 km of existing asphalt surface roads becoming potential candidates for conversion to chip seal and 75 km would no longer be candidates for converting from chip seal to asphalt. The estimated net impact could be as much as an additional \$1.7 million annual cost avoidance in excess of the \$4.6 million.

SUMMARY

The proposed framework consisted of a two-staged screening approach, which included both initial screening criteria and site specific screening criteria. The initial screening criteria were based on a given road's functional classification, daily traffic volumes, and daily truck volumes. The site specific screening criteria allows for the consideration of other roadway characteristics such as the presence of steep grades, the significance to tourism, etc. The factor thresholds contained in the initial screening criteria were selected using a least lifecycle costing approach for the various surface types. It was found that the greatest potential cost reductions of the proposed road surfacing strategy are most likely to result from the conversion of existing asphalt roads to a chipseal surface. Based on applying the proposed screening criteria, 880 km of existing asphalt roads were identified as candidates for conversion to chip seal and 400 km of existing chip seal roads candidates for conversion to asphalt. The proposed pavement management strategy was estimated to reduce rehabilitation costs by \$4.6 million annually, which represents about five to ten percent of the total annual resurfacing program over the past decade.

REFERENCES

1. Low Volume Road Surface Evaluation Program. Nova Scotia Department of Transportation & Infrastructure Renewal (2011).
2. Selection of Surface Type for Low Volume Roads. Applied Research Associated (2007).
3. The Use of Surface Course Types on Provincial Highways - Ministry Directive PLNG-C-003. Ontario Ministry of Transportation (2006).
4. Sealcoating Permitted Use on Provincial Highways. British Columbia Ministry of Transportation Internal Policy Document (2008).
5. Techniques for Low Volume Roads in Saskatchewan. Saskatchewan Ministry of Highways & Infrastructure (Ania Anthony). Presentation at Western Canada Pavement Workshop February 1-2, 2011.
6. Guidelines for Upgrading Low Volume Roads in Saskatchewan. Saskatchewan Ministry of Highways & Infrastructure (Retzlaff, Kent, Podborochynski, Krawec). Presentation at Transportation Association of Canada Annual Conference (2007)
7. When to Pave a Gravel Road. Kentucky Transportation Center, University of Kentucky.
8. Development of a Surfacing Policy for Low-Volume Roads in South Dakota. Zimmerman, K., Wolters, A., Luft, D., and Oien, P. Transportation research Record No 1913 Pp.109-116 (2005).
9. Local Road Surfacing Criteria. Prepared for South Dakota Department of Transportation by Applied Pavement Technology Inc. (2004).
10. To Pave or Not to Pave? University of Minnesota Center for Transportation Studies (2006).
11. Chip Seal Fact Sheet. Ohio State Department of Transportation.
12. Policy for Upgrading low Volume Gravel Roads to Paved. Cole County, Missouri (1997)
13. Economics of Upgrading an Aggregate Road. Minnesota Department of Transportation (2005).
14. Context Sensitive Roadway Surfacing Selection Guide. US Federal Highways Administration Publication No. FHWA-CFL/TD-05-004 (2005).
15. Chip Seal Best Practices. NCHRP Synthesis 342.
16. Guidelines for Selecting Surfacing Alternatives for Unsealed Roads. Transportation Research Record No 1989 Vol. 2. Pp 237-246 (2007).