

EFFECTS OF CRAB SCRAPS ON MARINE ENVIRONMENTS

by

Teresa Anne Kramer

Thesis submitted to the Faculty of the

Virginia Polytechnic Institute and State University

in partial fulfillment of the requirements for the degree of

MASTER OF SCIENCE

in

Environmental Sciences and Engineering

APPROVED:

Dr. Gregory Boardman, Chairman

Dr. Robert C. Hoehn

Dr. George Flick

March, 1983
Blacksburg, Virginia

ACKNOWLEDGEMENTS

The author would like to acknowledge the following people for their assistance in this research:

1. Bill Outten and the State of Maryland for contracting with V.P.I. and S.U. for this research.
2. Dr. Boardman and Dr. Flick, who pursued the contract and aided the author throughout the research.
3. Dr. Hoehn and Ken Riggins, who provided continued moral support and technical assistance.
4. The residents of Tappahannock, Virginia, who were very friendly and made the research trips enjoyable.
5. Weston Conley for providing an abundance of crab scrap for the research.
6. Teresa Sherman whose friendship was inspirational.
7. Sue Osborne for the graphic work and illustrations.
8. Kim and Zachariah Kramer for their company and assistance on the research trips and for their love, patience, and understanding throughout this research.
9. Mr. and Mrs. Strahm for the critiquing, typing, and proofing of the thesis.
10. And last, but definitely not least, God, for providing the strength, wisdom, and will to succeed.

TABLE OF CONTENTS

	PAGE
ACKNOWLEDGEMENTS	ii
LIST OF TABLES	vi
LIST OF FIGURES	vii
I. INTRODUCTION	1
II. LITERATURE REVIEW	4
Burial/Landfilling	10
Land Application	12
Crab Meal Production	12
Offshore Dumping	14
Characteristics of Crab Scrap	16
Shell	17
Viscera	17
Egg Masses	19
III. MATERIALS AND METHODS	21
<u>Field Studies</u>	
Site Characterizations	21
Site A	23
Site B	23
Site C	23
Site D	26
Site E	26
Site F	26
Scrap Containment Devices and Placement	28
Type 1	28
Type 2	28
Scrap Preparation and Deposition	33
Loose	33
Uncoated	33
Coated	33
Sensory Observations	34
Sampling Procedures	34
Water	34
Sediment	35
Scrap	35

III. MATERIALS AND METHODS (con't)

	PAGE
<u>Tank Studies</u>	36
Tank and Ambient Conditions.	36
Tanks A, B, and C.	36
Tanks D, E, F and G.	38
Scrap Preparation and Deposition	38
Loose.	38
Compacted.	38
Compacted, Coated.	39
Coated	39
Analytical Observations.	39
Sensory Observations	40
<u>Oxygen Demand Study</u>	41
<u>Cadmium Uptake Study</u>	42
<u>All Studies.</u>	43
Methods of Measurement and Analysis.	43
IV. RESULTS.	49
<u>Field Studies.</u>	49
Field Study I.	49
Characterization of Sites.	49
Appearance of Scrap.	52
Field Study II	53
Characterization of Sites.	53
Appearance of Scrap.	61
Field Study III.	64
Characterization of Sites.	64
Appearance of Scrap.	64
<u>Tank Studies</u>	65
Tank Study I	65
Sensory Observations	65
Analytical Observations.	70
Tank Study II.	75
Sensory Observations	75
Analytical Observations.	85
<u>Oxygen Demand Study</u>	105
<u>Cadmium Uptake Study</u>	108
V. DISCUSSION	119
<u>Field Studies.</u>	119
<u>Tank Studies</u>	122
<u>Oxygen Demand Study.</u>	126
<u>Cadmium Uptake Study</u>	128
<u>Recommended Disposal Procedure</u>	129
VI. SUMMARY AND CONCLUSIONS	132
VII. RECOMMENDATIONS.	135

	PAGE
VIII. REFERENCES.	136
IX. APPENDIX.	138
X. VITA.	145

LIST OF TABLES

Table	Page
I. Total annual blue crab landings, in pounds, for Virginia and Maryland, by month, and estimated solid waste generated, 1960 - 1978 (from reference 3).	5
II. Characteristics of field sites A, B, and C .	50
III. Characteristics of field sites D, E, and F .	54
IV. The concentrations of various metals found in the water, sediment, and shell at sites D, E, and F on selected days in June of 1982	62
V. Sensory observations made during Tank Study I.	66
VI. Sensory observations made during Tank Study II	78
VII. Results of the BOD ₅ analysis of ground crab scrap using seawater as the testing medium .	106
VIII. Results of the BOD ₅ analysis of ground crab scrap using BOD dilution water as the testing medium	107
IX. Results of the BOD ₅ analysis of alginate using seawater as the testing medium	109
X. Results of the BOD ₅ analysis of alginate using BOD dilution ⁵ water as the testing medium	110
XI. Results of the COD analysis of ground crab scrap.	111
XII. Results of the COD analysis of alginate. . .	112

LIST OF FIGURES

Figure	Page
1. Percent of the total annual blue crab scrap generated by month in Virginia, 1960 - 1978 averaged (from reference 3).	6
2. Percent of the total annual blue crab scrap generated by month in Maryland, 1960-1978 averaged (from reference 3).	7
3. Locations of the blue crab processors in Virginia (from reference 3)	8
4. Locations of the blue crab processors in Maryland (from reference 3) ,	9
5. Transverse section of a crab cuticle (from reference 10)	18
6. Abdomen of a female blue crab, <u>Callinectes sapidus</u> , with an egg mass beneath the apron.	20
7. Map of the Chesapeake Bay, showing field research areas for this study.	22
8. Map of the Lynnhaven Inlet, Virginia Beach, Virginia, Site A	24
9. Map of the Hampton Roads area of the Chesapeake Bay, Norfolk, Virginia, Site B and Site C.	25
10. Map of the Corrotoman and Rappahannock Rivers, Virginia, Site D, Site E, and Site F	27
11. Type 1, Scrap Containment Device	29
12. Type 2, Scrap Containment Device	31
13. Anchorage of the Type 2, Scrap Containment Device	32
14. Configuration of the tanks and lids used in the Tank Studies	37
15. Water temperature and dissolved oxygen variations with depth at Site D at 1615 hours on 5 June 1982.	55

Figure	Page
16. Water temperature and dissolved oxygen variations with depth at Site D at 1230 hours on 27 June 1982	56
17. Water temperature and dissolved oxygen variations with depth at Site E at 1730 hours on 5 June 1982.	57
18. Water temperature and dissolved oxygen variations with depth at Site E at 1145 hours on 27 June 1982	58
19. Water temperature and dissolved oxygen variations with depth at Site F at 1820 hours on 5 June 1982.	59
20. Water temperature and dissolved oxygen variations with depth at Site F at 1040 hours on 27 June 1982	60
21. Concentrations of Cd and Zn found in the water, sediment, and shell at Site D, Site E, and Site F	63
22. Daily variations in the concentration of NH_3 in the water in Tanks A, B, and C during the first six days of Tank Study I	71
23. Daily variations in the turbidity of the water in Tanks A, B, and C during the first six days of Tank Study I.	73
24. Daily variations in the concentration of TOC in the water in Tanks A, B, and C during the first six days of Tank Study I	74
25. Daily variations in the concentration of BOD_5 in the water in Tanks A, B, and C during the first six days of Tank Study I	76
26. The variations in the concentrations of nitrogen containing compounds in the water in Tank D on the sampling days of Tank Study II.	87
27. The variations in the concentrations of nitrogen containing compounds in the water in Tank E on the sampling days of Tank Study II.	88

Figure	Page
28. The variations in the concentrations of nitrogen containing compounds in the water in Tank F on the sampling days of Tank Study II. . . .	89
29. The variations in the concentrations of nitrogen containing compounds in the water in Tank G on the sampling days of Tank Study II. . . .	90
30. The variations in the concentrations of nitrogen containing compounds in the water in Tanks D, E, F, and G on the sampling days of Tank Study II	91
31. The variations in the concentration of TOC in the water in Tank D on the sampling days of Tank Study II.	93
32. The variations in the concentration of TOC in the water in Tank E on the sampling days of Tank Study II.	94
33. The variations in the concentration of TOC in the water in Tank F on the sampling days of Tank Study II.	95
34. The variations in the concentration of TOC in the water in Tank G on the sampling days of Tank Study II.	96
35. The variations in the turbidity, pH, and the dissolved oxygen concentration in the water in Tank D on the sampling days of Tank Study II .	98
36. The variations in the turbidity, pH, and the dissolved oxygen concentration in the water in Tank E on the sampling days of Tank Study II.	99
37. The variations in the pH and the dissolved oxygen concentration of the water in Tank F on the sampling days of Tank Study II.	100
38. The variations in the pH and the dissolved oxygen concentration of the water in Tank G on the sampling days of Tank Study II.	101

Figure		Page
39.	The variations in the turbidity of the water in Tank F on the sampling days of Tank Study II.	103
40.	The variations in the turbidity of the water in Tank G on the sampling days of Tank Study II.	104
41.	Uptake of Cd by crab shells over an eight day period.	114
42.	Uptake of Cd by 8 g of crab shell over an eight day period.	115
43.	Uptake of Cd by 16 g of crab shell over an eight day period.	116
44.	Uptake of Cd by 32 g of crab shell over an eight day period.	117
45.	Levels of Cd adsorbed by various amounts of crab shell after eight days	118

I. INTRODUCTION

Many years ago the crab processing industry disposed of crab waste by dumping it into the natural waters adjacent to their processing plants. This was the most convenient and inexpensive method of disposal. The only cost was for an occasional dredging of the dumping area to remove the accumulated shell material.

Some processors took this disposal method a step further and used the waste as a resource. They would choose a spot in the water away from the dock to dump the wastes. Dumping in this area would proceed over a period of one week to a month. By the end of that time, the area would have become a feeding ground for eels. A week after the dumping had stopped, eel traps were placed in the area and the harvest began. (1)

As environmental concerns heightened, legislative and enforcement actions were taken to stop the dumping of crab processing wastes into public waters of Virginia and Maryland. Most of the complaints filed against the disposal method were aesthetically based, e.g., visible floating debris, odor problems, and increased turbidity. No formal research was conducted to assess the environmental impact of the method.

After the banning of offshore dumping in 1972, the crab processing industry turned to three alternatives. These were burial/landfilling, agricultural land application, and crab-meal production. Of these, crab-meal production, until

recently, was the most economically and environmentally sound method of crab waste disposal. However, rising interest rates and building costs and the falling market price of crab-meal have resulted in either the postponement or cancellation of construction plans for additional crab-meal processing plant. With crab-meal production severely handicapped and landfilling options being cut back, attention has turned to the revitalization of offshore dumping.

The work described herein was undertaken as part of a project which was funded by the Maryland Department of Natural Resources. The overall goal of the project was to investigate the feasibility of the offshore disposal method.

The objective of this study was to evaluate the problems associated with offshore disposal of crab scrap and to develop a means of handling the crab scrap which would minimize these problems.

Scope of Study

The first topic addressed in this research was the identification of a method of scrap preparation that would reduce the volume of the crab scrap, reduce odor during scrap handling, prevent floating scrap, and be easily and inexpensively implemented by the crab processors. Four methods of scrap preparation were tested. Two involved just the scrap

and two involved an alginate coating for the scrap. A sample of each of the scrap preparations was then tested in the laboratory to determine the degree to which the aforementioned criteria were met. The effects of the scrap on water quality were also examined. Laboratory analyses of the oxygen demand exerted by the degradation of the scrap and the alginate were performed. The two methods of scrap preparation which seemed to best meet the criteria were then tested in the field in an attempt to determine the dispersion/degradation rate of the scrap.

Also of interest was the adsorptive capacity of the shell material for heavy metals. This was investigated through both field and laboratory studies. During one of the field studies, shell, sediment, and water samples were taken for analysis of selected metals. In a laboratory study, the ability of the shell material to adsorb cadmium was investigated.

II. LITERATURE REVIEW

Crabs are this nation's fourth most valuable fishery, surpassed only by shrimp, salmon and tuna (2). Approximately one-half of the crab harvest is comprised of the blue crab (Callinectes sapidus) and, of the blue crabs landed nationally, 50 percent are taken from the Chesapeake Bay area (2). This means that between 50 and 80 million pounds of crabs are harvested from the Chesapeake Bay area each year (Table I) (3).

Along with this valuable industry comes a major waste disposal problem. Approximately 70 percent, by weight, of the crab harvest becomes waste material (3). This solid waste is primarily the inedible shell and viscera of the crab.

Crab waste is produced not only in large amounts but also with a high degree of seasonal variability and in localized areas (3). In Virginia, over 55 percent of the annual crab scrap is generated in the five months from June through October (Figure 1). In Maryland, the seasonal generation of scrap is even more pronounced, with 88 percent of the annual crab scrap generated in the five months from June through October (Figure 2). Figures 3 and 4 show the areas in Virginia and Maryland, respectively, where 50 to 80 million pounds of crabs are processed annually. The Virginia industries process approximately 66 percent of these crabs, thus

TABLE I. TOTAL ANNUAL BLUE CRAB LANDINGS IN POUNDS FOR VIRGINIA AND MARYLAND, BY MONTH, AND ESTIMATED SOLID WASTE GENERATED, 1960 - 1978 (FROM REFERENCE 3).

Month	Virginia	Maryland	Total
September	5,069,589	4,215,256	9,284,845
October	4,776,336	3,047,887	7,824,223
November	2,202,381	896,099	3,098,480
December	4,199,626	99,133	4,298,759
January	2,705,689	1,133	2,706,822
February	2,040,510	793	2,041,303
March	1,402,438	1,384	1,403,822
April	2,402,127	377,972	2,780,099
May	3,652,328	1,159,042	4,811,370
June	4,677,860	3,028,147	7,706,007
July	5,317,491	5,082,731	10,400,222
August	5,666,528	5,124,676	10,791,204
Total	44,112,903	23,034,253	67,147,156
* Total Scrap	30,879,032	16,123,977	47,003,009
**Total Meat	9,925,403	5,182,707	15,108,110

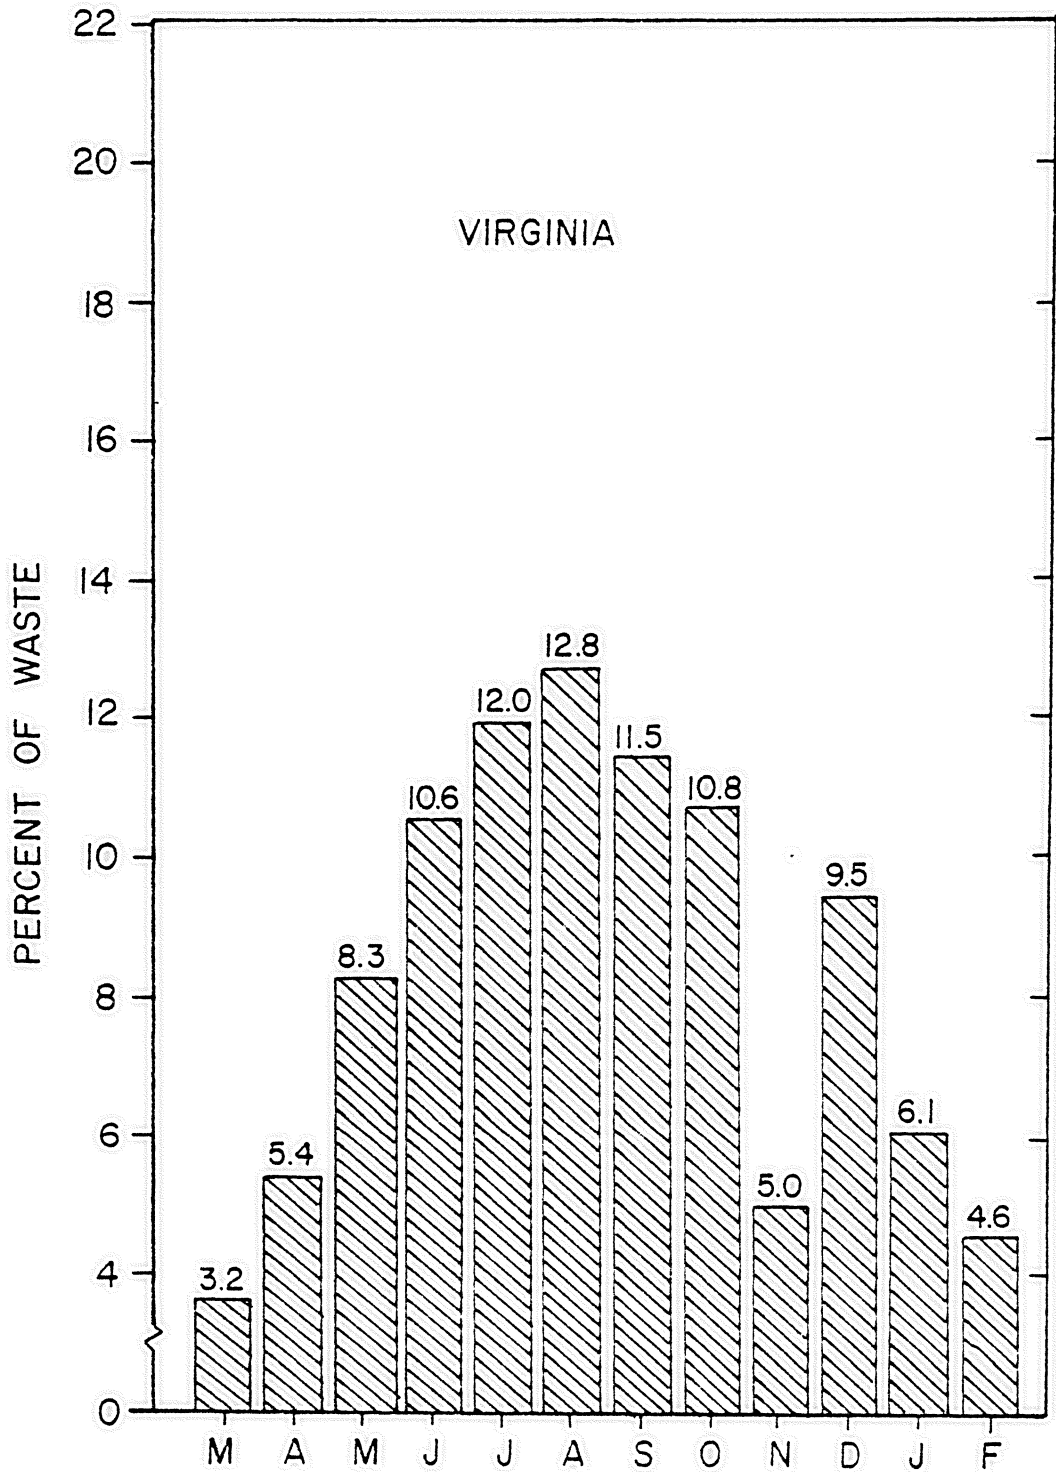


Figure 1. Percent of the total annual blue crab scrap generated by month in Virginia, 1960-1978 averaged (from reference 3).

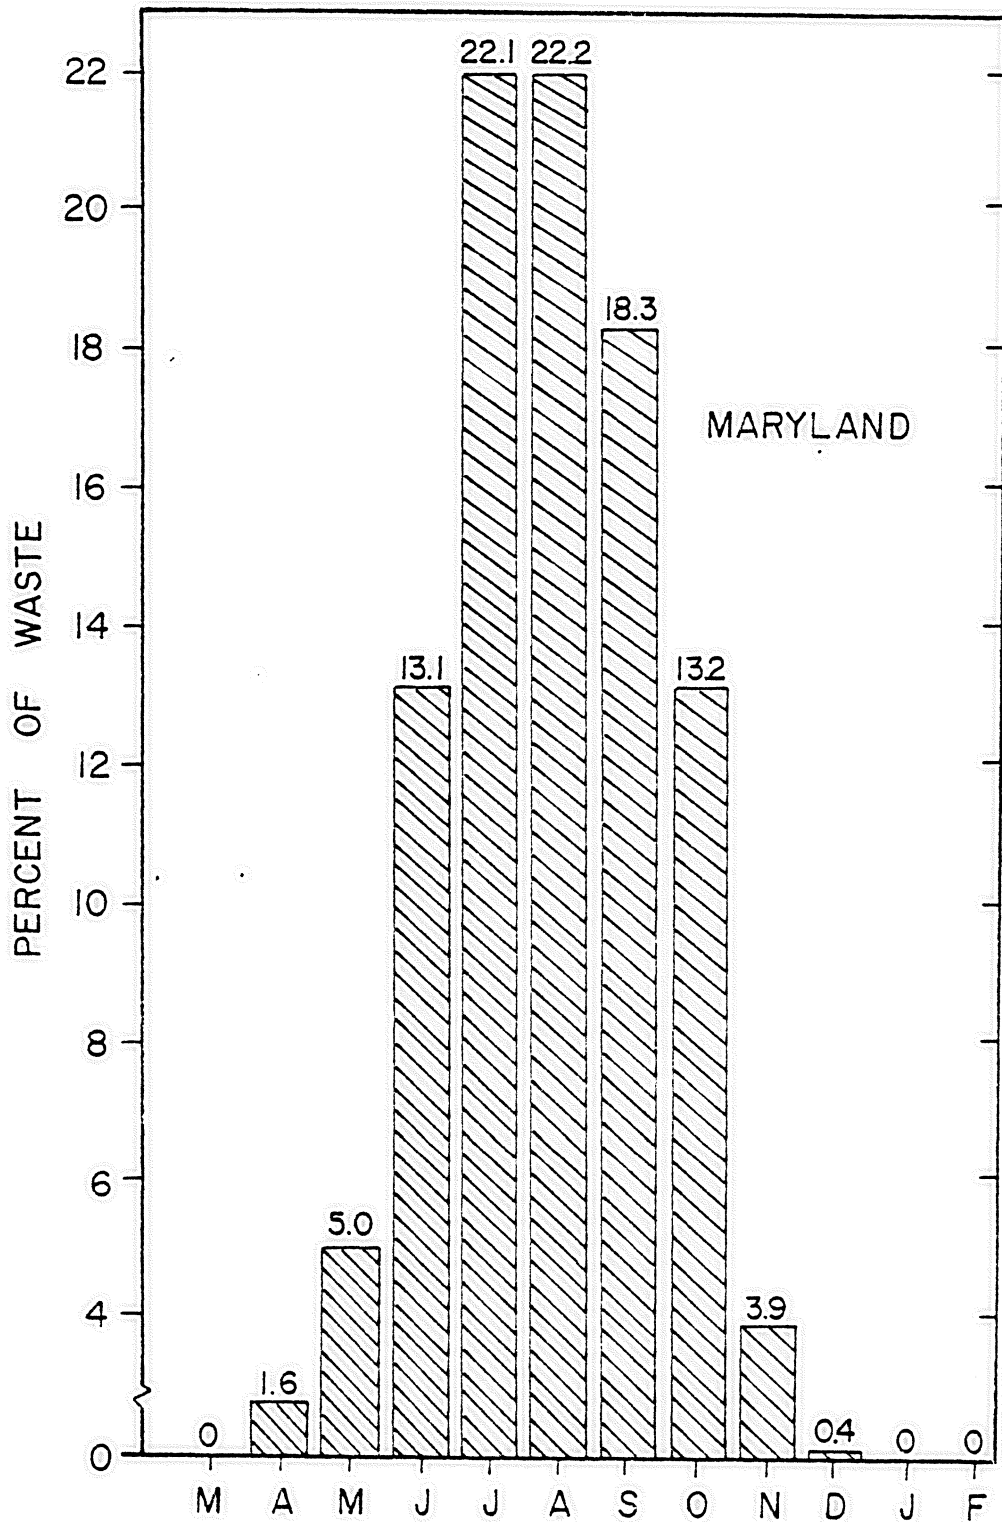


Figure 2. Percent of the total annual blue crab scrap generated by month in Maryland, 1960-1978 averaged (from reference 3).

Virginia's Landings

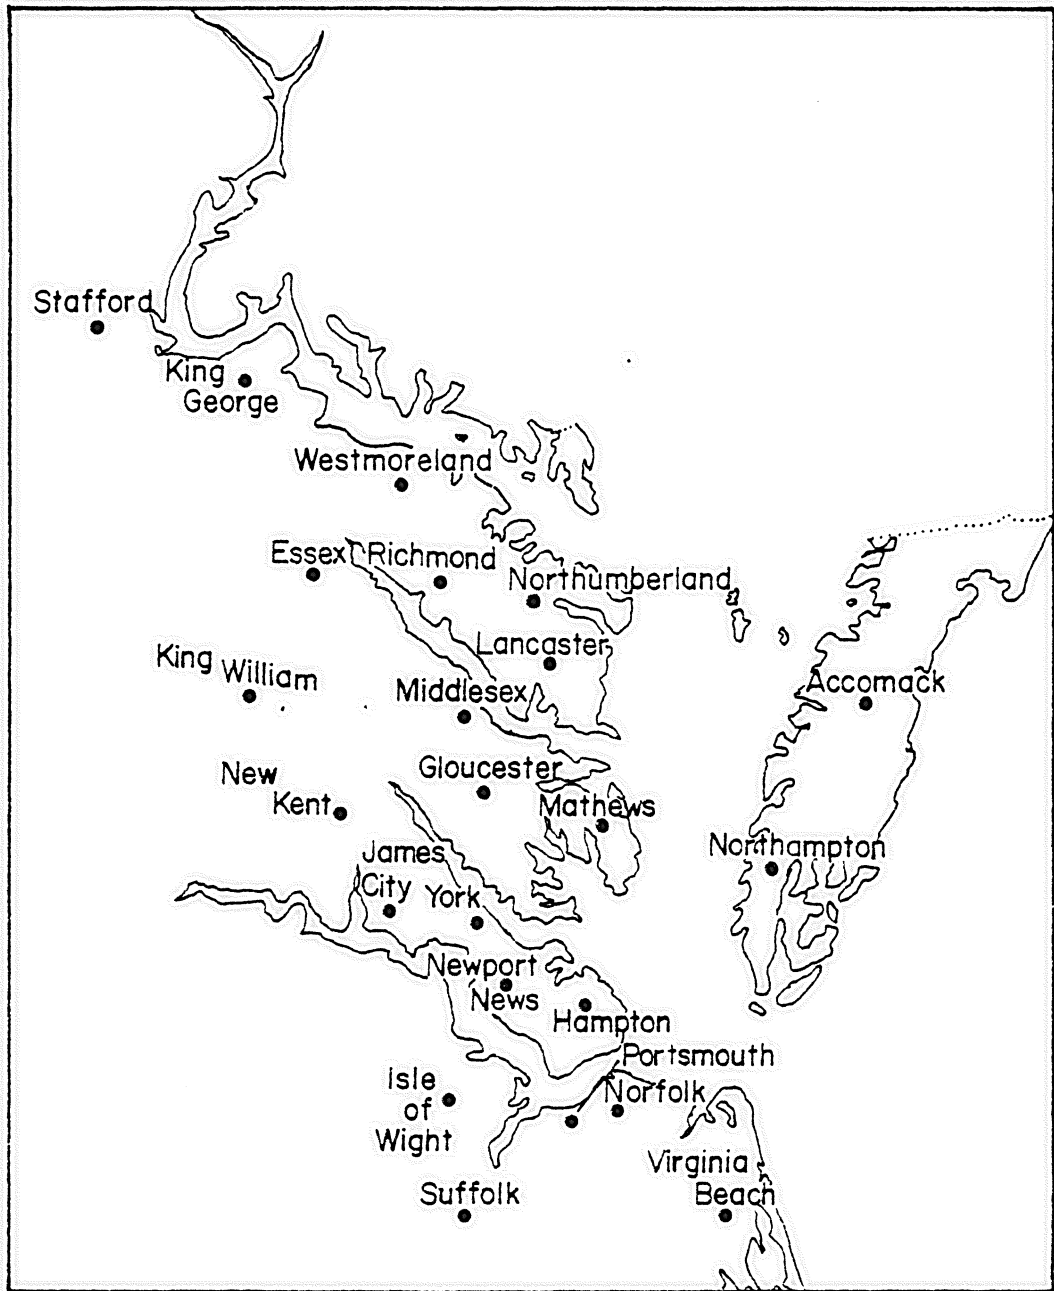


Figure 3. Locations of the blue crab processors in Virginia (from reference 3).

Maryland's Landings

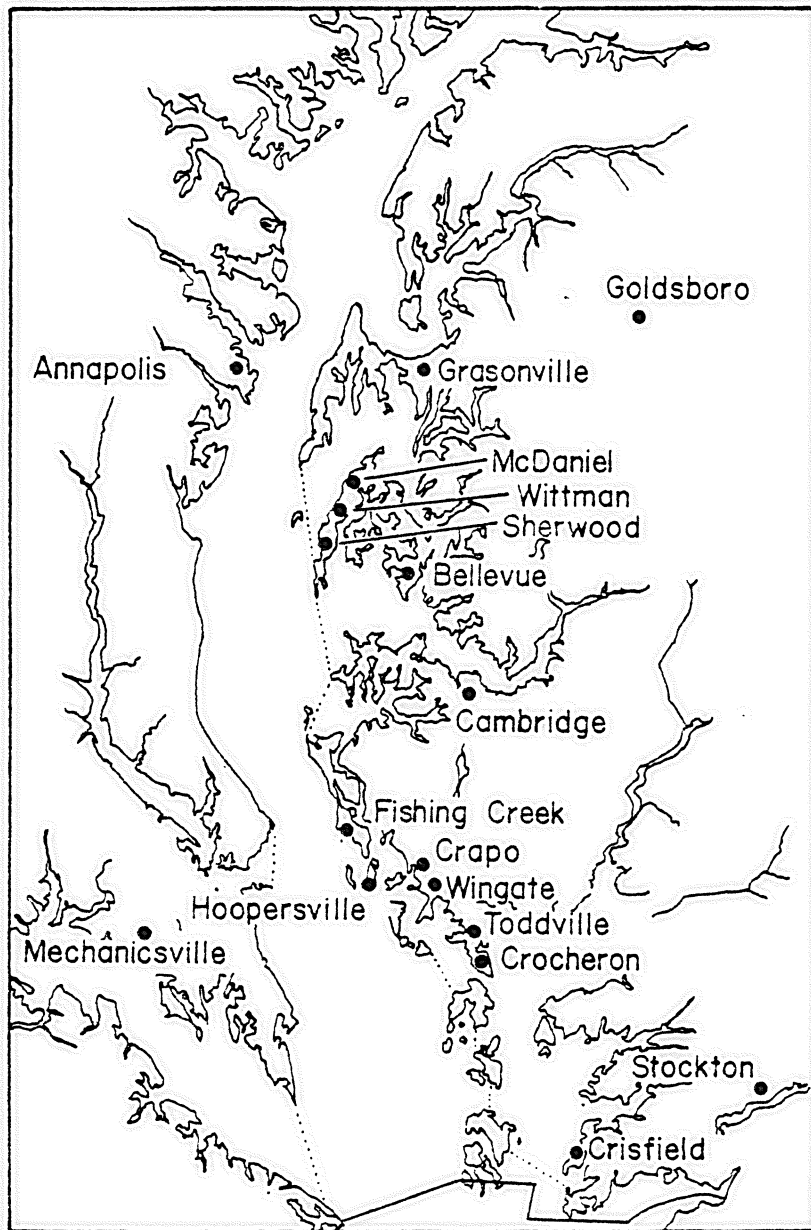


Figure 4. Locations of the blue crab processors in Maryland (from reference 3).

producing 66 percent of the crab scrap, while the Maryland processors produce the remaining approximately 34 percent of the crab scrap. The problem of localized production of crab scrap may be illustrated by the fact that 66 percent of the crab scrap produced in Maryland, or approximately 10.5 million pounds per year, is produced by the processors located in the 350 square miles due west of a line extending from Cambridge to Stockton (4). Both the seasonal variability and the localized production of the crab scrap combine to severely restrict the waste disposal options.

In the following sections, the four major scrap disposal methods currently in use are described. They are: burial/landfilling, agricultural land application, crab-meal production and offshore disposal. The advantages and disadvantages of each method are discussed. The character of the crab-processing wastes is also described in the final section of this chapter.

Burial/Landfilling

The use of a landfill or dump is a convenient, inexpensive disposal method. The only costs incurred by the processor are those of hauling and landfill fees. It would seem to be a viable option where either ample land suitable for sanitary landfills or landfills licensed to accept putrescible matter are available.

However, it has been found that crab scrap is a very difficult material to landfill. The "drip" from the transport truck causes insect - and odor problems along the route to the landfill (5) and has alienated many communities. The odor generated by crab scrap has been a major problem for landfill personnel who must remain at the landfill site for ten hours at a time (6). Even though the scrap comes into the landfill fresh and is immediately covered, the volatile gases produced during the decomposition of the crab meat cause cracking of the cover material, resulting in odor problems (4).

Another major problem with crab scrap disposal at landfills is the large volumes involved. One landfill in Somerset County, Maryland estimated that they would be required to accept 7000 cubic yards of crab scrap in 1980 (6). This annual volume would markedly decrease the useful life of most landfills in the vicinity of crab processors. Also, the intermittent cover for this volume of scrap required the expensive hauling of extra cover material which, in turn, placed an additional tax burden on the county residents (6).

George Miles, supervisor of Somerset County Landfill, has stated, "In Somerset County we would appreciate any alternative to disposal in our landfills" (6). Other municipal and private landfill operators are sure to share this position.

Land Application

Many crab processors have the scrap disked into fields as a crude fertilizer for grasses and crops. This has been common practice in the central and upper Chesapeake Bay for many years and, if properly managed, is a viable disposal method in the spring before the crops have been planted or in the fall after the crops have been harvested (4). Unfortunately, the majority of the crab scrap is produced after the farmland has been planted (Figures 1 and 2).

This method also cannot be used when the ground is too wet for tilling. The scrap must be turned under immediately after application to realize the maximum fertilizer value (4). If allowed to remain on the surface, severe odor and pest problems result.

Another problem which has recently become evident is the subdividing of farm lands into residential plats and developments. The land application method of scrap disposal requires large areas of agricultural fields away from residential areas. The current expansion of residential housing into agricultural farm land may therefore preclude this method of disposal.

Crab-Meal Production

This is the most recently developed disposal technique and is more a resource recovery technique than a disposal

method. It involves the dehydration and pulverization of the scrap to form a crab-meal which is sold for use as a protein supplement poultry feed.

In 1979, when crab-meal prices were high (\$146 per ton) and energy costs relatively low, this method of disposal/resource recovery was not only environmentally sound, but was also profitable (1). However, since energy costs have increased and crab-meal prices have decreased to a level of \$100 per ton in 1982, this method is no longer profitable (1). This decrease in the price of crab-meal was required so that crab-meal would remain competitive with the grains used in poultry feeds. The prices of these grains had decreased markedly in 1981 and 1982. Another point of competition between crab-meal and feed grains is the consistency of supply (1).

It has always been difficult for crab-meal processors to provide the producers of poultry feed with a consistent supply of crab-meal because the production of crab scrap is so variable from year to year and season to season. This yearly and seasonal variability is also seen in grain production, but most farmers have solved this problem by forming a grain co-operative to store grain until it was needed. It follows that crab-meal processors should be able to remedy their supply problems by forming a similar co-operative for storage of crab-meal (1).

In areas where there are no crab-meal production facilities, this disposal technique is not feasible. With current high interest rates and construction and machinery costs, the present price of the crab-meal does not come close to warranting the construction of new facilities (1).

Offshore Dumping

Currently, South Carolina is the only state which issues National Pollutant Discharge Elimination System (NPDES) permits for controlled dumping of crab scrap (5). They allow several crab processors "to dump at designated water areas in the vicinity possessing adequate depth, flow and/or marine life to adequately absorb the solids and/or have a beneficial impact upon the surrounding ecosystems" (5). According to John Ohlandt, of the Charleston office of the South Carolina Department of Health and Environmental Control (SCDHEC), there are no specific regulatory criteria or standards governing site selections for the offshore disposal of crab scrap. The decision to allow crab scrap dumping in a particular area is left to the discretion of the SCDHEC agent (7).

This has been a major step toward solving the disposal problem. Even though a NPDES permit is required, an Environmental Protection Agency (EPA) ocean dumping permit is not. This is because fish wastes are excluded from the Federal ocean dumping and permit requirements and fish wastes are

defined by the EPA as the returning to the sea of any unadulterated (without additive) seafood wastes (8).

Arguments in support of this disposal method center around the fact that it returns nutrients to nutrient deficient portions of the sea for support of marine ecosystems. The contention is that the process recycles products taken from the sea in a manner similar to the natural process of death and decay in the sea (8).

Section 74 Seafood Processing Study Executive Summary (9) was the only research found which addressed the environmental impact of the disposal of crab scrap in a marine environment. This study mainly addressed the direct piping of seafood wastes from the processing plants into the adjacent waters. This differs greatly from offshore disposal, but will be addressed in this section, as it is apparently the only related research available.

The environmental impacts which these researchers identified were highly site specific. The sites used were located in the Dutch Harbor, Cordova, and Kenai areas of Alaska. The worst impacts were found in the Dutch Harbor area of Alaska. This is a very confined harbor which has very restricted circulation patterns and a heavy volume of processing activity. The negative impacts experienced in this area were high ammonia, hydrogen sulfide, and phosphorus concentrations, low dissolved oxygen concentrations, large

accumulations of wastes, and some floating matter (9).

The Cordova sites exhibited better circulation patterns than those seen in Dutch Harbor, however, they were still quite restricted. One processor in this area had been dumping whole crab scrap from the dock. The water around the dock exhibited a slight surface discoloration and floating debris was observed. The accumulation of waste seemed to be restricted to an area within five meters of the dock. Despite these waste accumulations, Cordova's water quality was generally good (9).

In evaluating the Alaskan studies, the U.S. Fish and Wildlife Service concluded that these investigations were too brief and localized to support definite conclusions. However, the study did help to identify the major concerns which have been associated with crab scrap disposal in a marine environment (9).

Characteristics of Crab Scrap

Reports of studies characterizing crab processing scrap are not available. However, it is known that the scrap is comprised mainly of shell, viscera and egg masses. The character of these crab parts and, consequently, the predominant characteristics of the crab scrap can be predicted rather accurately from anatomical knowledge of crabs.

Shell

The exoskeleton or shell is a tough cuticle which is heavily calcified over most of the outside of the body. It is composed of four layers: epicuticle, exocuticle, endocuticle and membranous layer (Figure 5) (10).

The epicuticle is the outer layer and is the only layer of the shell which does not contain chitin. It is made up of lipo-protein. It is not as heavily calcified as the other layers and retains some flexibility (10).

The exocuticle and endocuticle layers are similar. They both contain matrixes of chitin-protein microfibrils. These microfibrils are arranged in such a way as to impart great strength to the shell. Both layers are strengthened by heavy calcification of this chitin-protein matrix.

The innermost layer is the membranous layer which is similar to the endocuticle in construction, but is uncalcified. It appears as a cellophane-like sheet covering the interior of the endocuticle (10).

Viscera

The viscera is comprised of the gills, bladder, heart, stomach, intestines and hepatopancreas. These are all organic in nature and form the readily degradable/putrescible portion of the scrap (10).

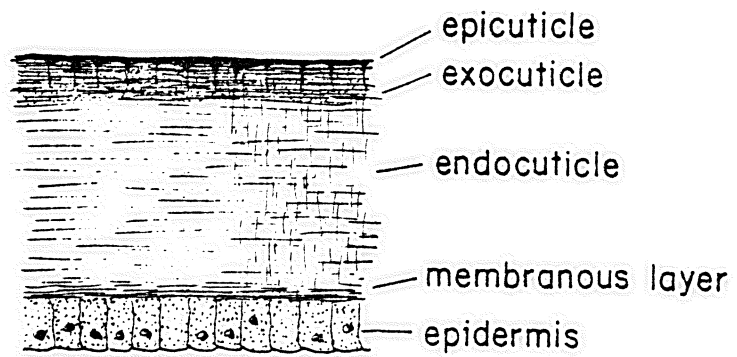


Figure 5. Transverse section of a crab cuticle (from reference 10).

Egg Masses

The appearance of egg masses in crab scrap is seasonal. They generally appear attached to the female crab in late spring and early summer throughout the lower reaches of the Chesapeake Bay.

These egg masses are bright orange, spongy and are found under the apron on the ventral surface of the female (Figure 6).

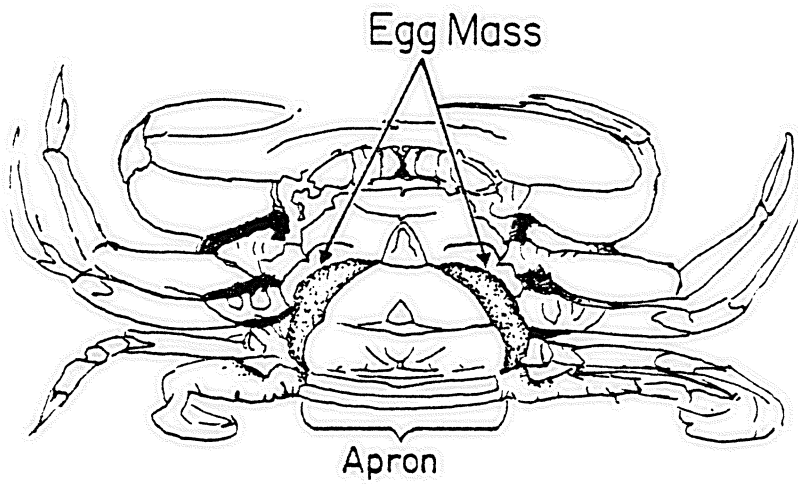


Figure 6. Abdomen of a female blue crab, Callinectes sapidus, with an egg mass beneath the apron.

III. MATERIALS AND METHODS

Field Studies

Site Locations and Characteristics

Sites A, B, and C were located in the Hampton Roads area of the Chesapeake Bay. This area is located just inside the mouth of the Chesapeake Bay, near Virginia Beach and Norfolk, Virginia. This area was chosen so that three sites could be selected which would vary widely in salinity, yet still be in close proximity to one another. These sites were used for Field Study I.

Sites D, E, and F were located in the Corrotoman River, which feeds into the Rappahannock River. This area is located near Irvington, Virginia, and is approximately 100 kilometers inside the mouth of the Chesapeake Bay (Figure 7). These sites were used for both Field Studies II and III.

In order to characterize conditions at each site, observations were made, measurements were taken and analyses were performed. Among the data collected were date, time, weather and sea conditions, times of tides, depth, type of sediment, current velocity, salinity, Secchi readings, pH, water temperature, dissolved oxygen (D.O.), organic nitrogen, ammonia (NH_3), nitrite/nitrate ($\text{NO}_2^- + \text{NO}_3^-$), alkalinity, total organic carbon (TOC), turbidity, lead (Pb), arsenic (As), mercury (Hg), cadmium (Cd), and zinc (Zn).

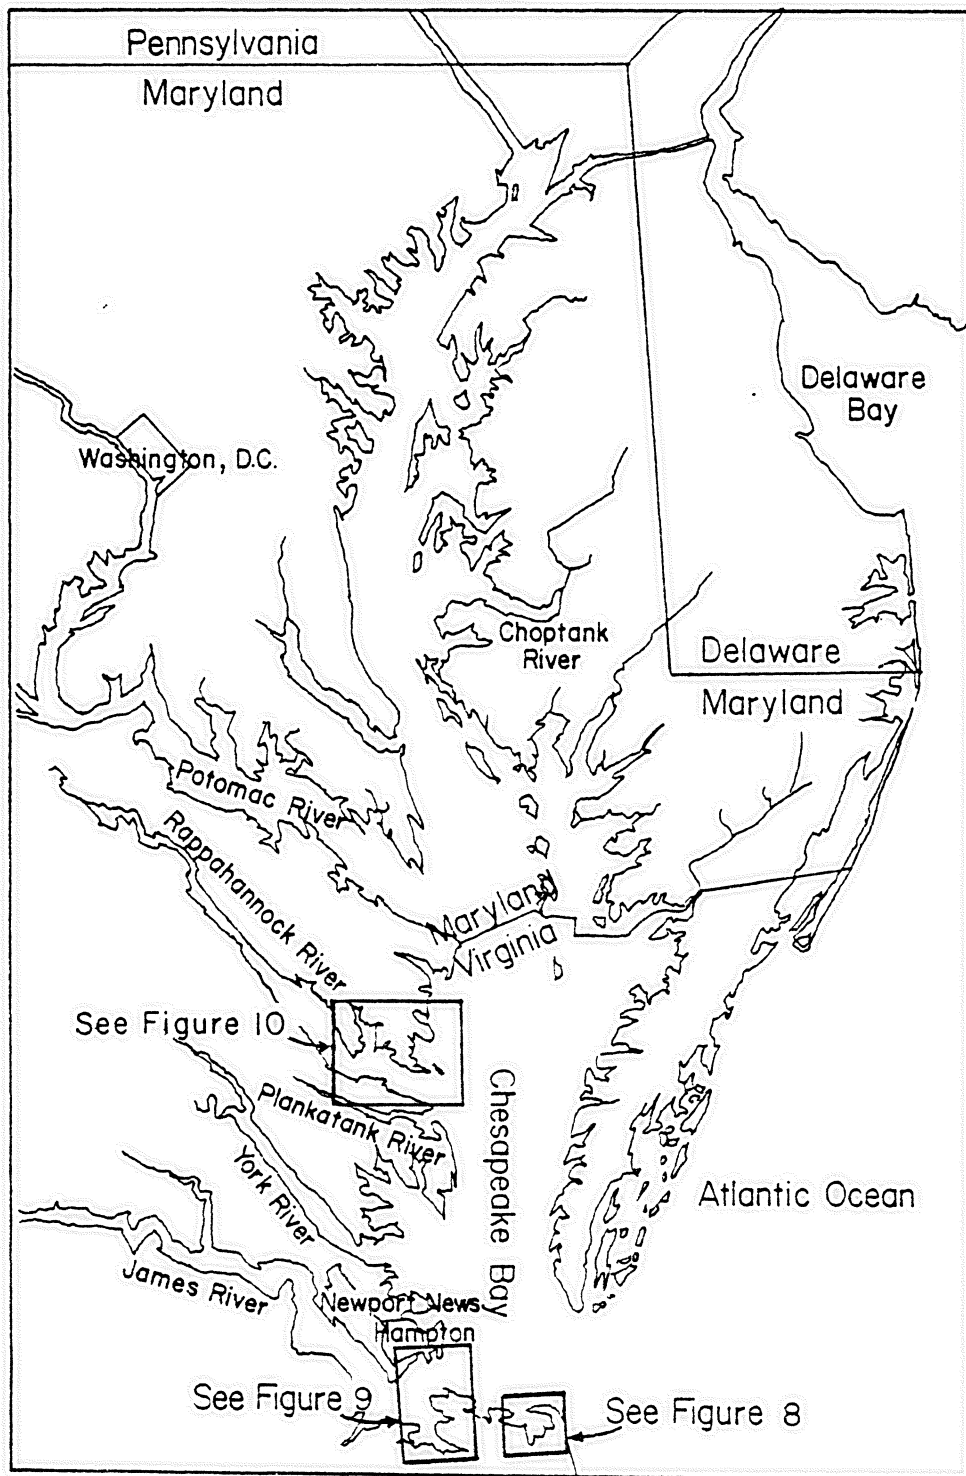


Figure 7. Map of the Chesapeake Bay, showing field research areas for this study.

Site A

Site A was directly outside the mouth of the Lynnhaven Inlet, Virginia Beach, Virginia (Figure 8). Two crab scrap containers were anchored in line with and between navigational marker number three and the tip of the Lynnhaven sandbar. An empty control container was anchored ten meters (m) due east of the crab scrap containers.

This site was chosen for its high salinity of 20 parts per thousand (ppt), its high tidal velocity, and its firm sandy bottom.

Site B

Site B was 150m due west of the tip of Willoughby Spit, Norfolk, Virginia (Figure 9). Two crab scrap containers were anchored midway between the navigational marker and the Hampton Road Tunnel Bridge. An empty control container was anchored 10m due north of the crab scrap containers.

This site was chosen for its moderate salinity of 14 ppt, its moderate-to-high tidal velocity, and its firm mud bottom.

Site C

Site C was in the Lafayette River in Norfolk, Virginia (Figure 9). Two crab scrap containers were anchored midway between the Granby Street Bridge and the Willow Wood Bridge, 15m offshore. An empty control container was anchored 10m

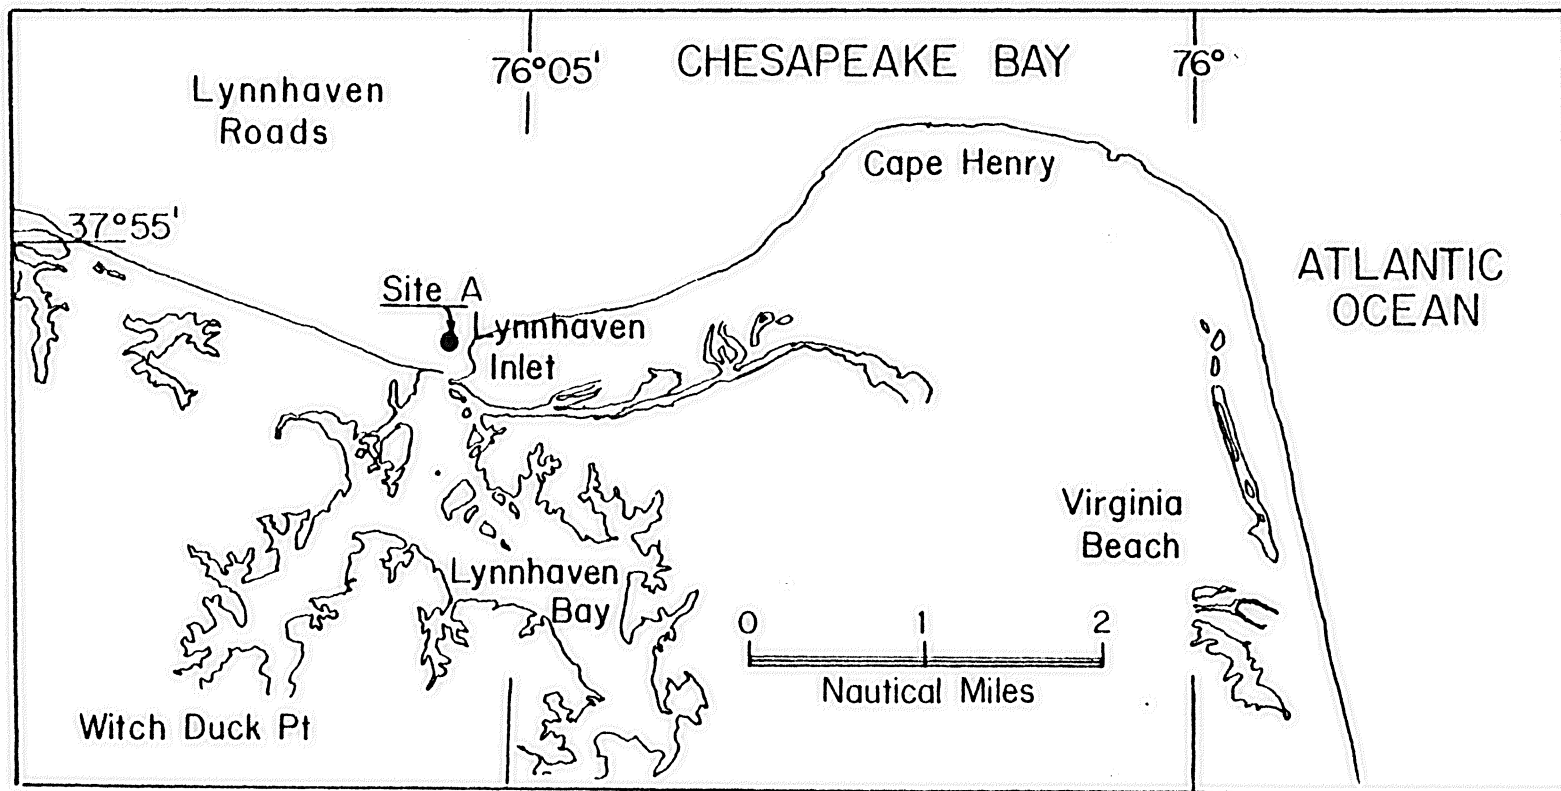


Figure 8. Map of the Lynnhaven Inlet, Virginia Beach, Virginia, Site A.

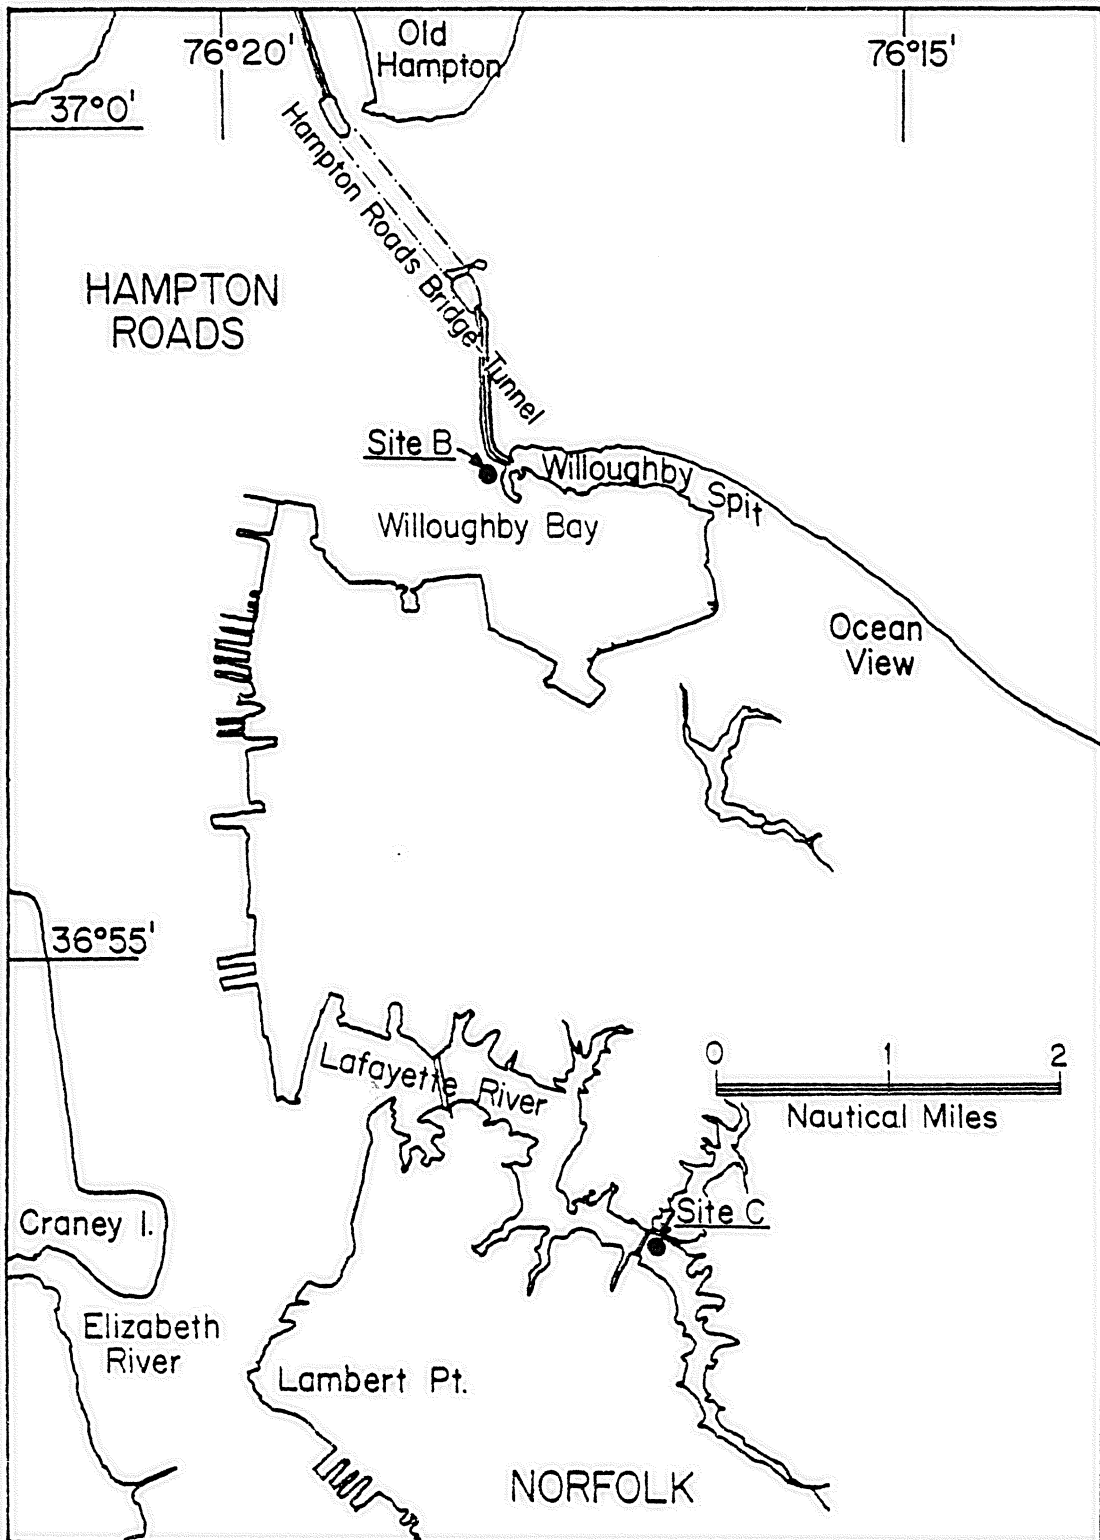


Figure 9. Map of the Hampton Roads area of the Chesapeake Bay, Norfolk, Virginia, Site B and Site C.

northeast of the crab scrap containers,

This site was chosen for its low salinity of 11 ppt, its moderate tidal velocity, and its muck bottom.

Site D

Site D was in the Corrotoman River, near Bar Point. Two crab scrap containers were anchored 15m northeast of navigational marker R2 (Figure 10). No control container was placed at this site.

This site was chosen for its low current velocity and its relatively shallow depth of approximately 4.5m.

Site E

Site E was in the Corrotoman River, near Taylors Creek. Two crab scrap containers were anchored 30m east of navigational marker R4 (Figure 10). No control container was placed at this site. This site was chosen for its low current velocity and its depth of approximately 6.0m.

Site F

Site F was just inside the mouth of the Corrotoman River. Two crab scrap containers were anchored midway between navigational marker M2 and the western shoreline. No control container was placed at this site.

This site was chosen for its low-to-moderate current

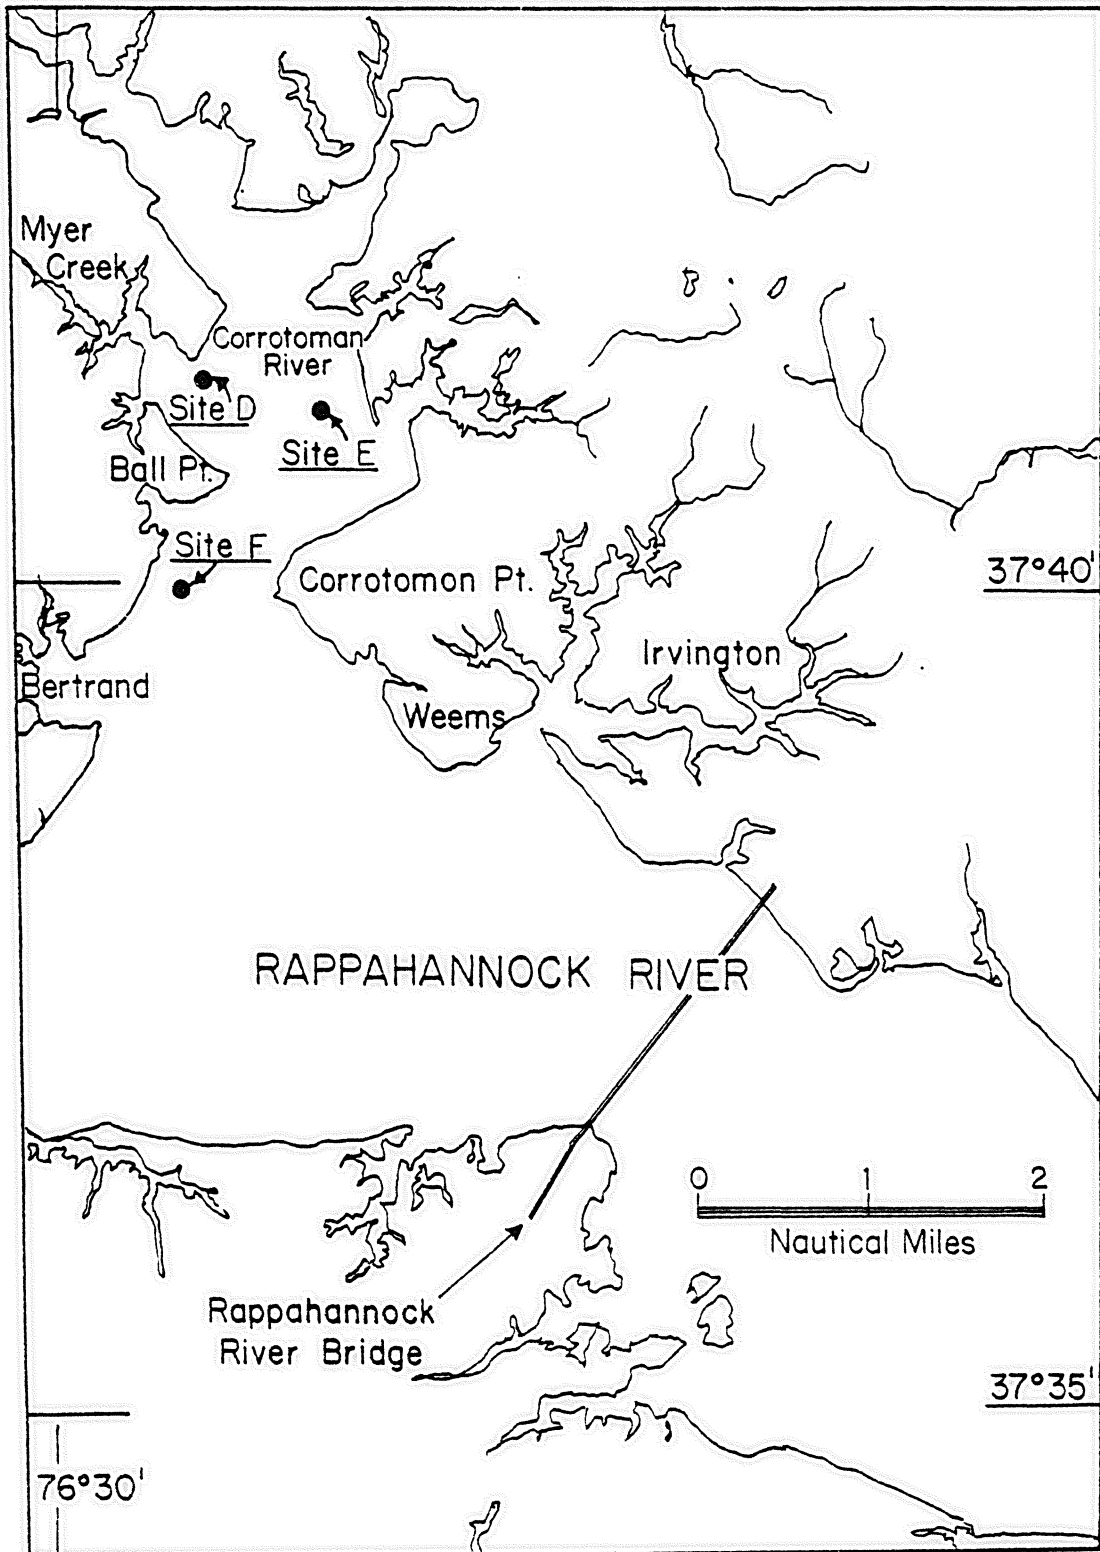


Figure 10. Map of the Corrotoman and Rappahannock Rivers, Virginia, Site D, Site E, and Site F.

velocity and its depth of approximately 10 m.

Scrap Containment Devices and Placement

Type 1

The Type 1 scrap containment device was designed to allow the scrap to be raised and lowered without any loss of scrap. Once on the bottom, the sides would fold down and expose the scrap to the surrounding environment (Figure 11).

Materials used in the construction of this device were relatively inert in the marine environment. The main body was formed from an extruded plastic mesh framework, with plastic ties used for hinges. Fiberglass screening (42 square per square centimeter (cm)) was attached to the interior walls of the plastic mesh by melting a portion of the plastic mesh around the screening and allowing it to harden. No metals or adhesives were used in the device.

Three of these Type 1 devices were placed at each of the three sites: Sites A, B, and C. Two were used for scrap containment and one remained empty, to be used as a control.

Type 2

The Type 2 scrap containment device was designed to allow water to flow through while retaining as much scrap as possible. To accomplish this, 20 holes of 2.5 cm in

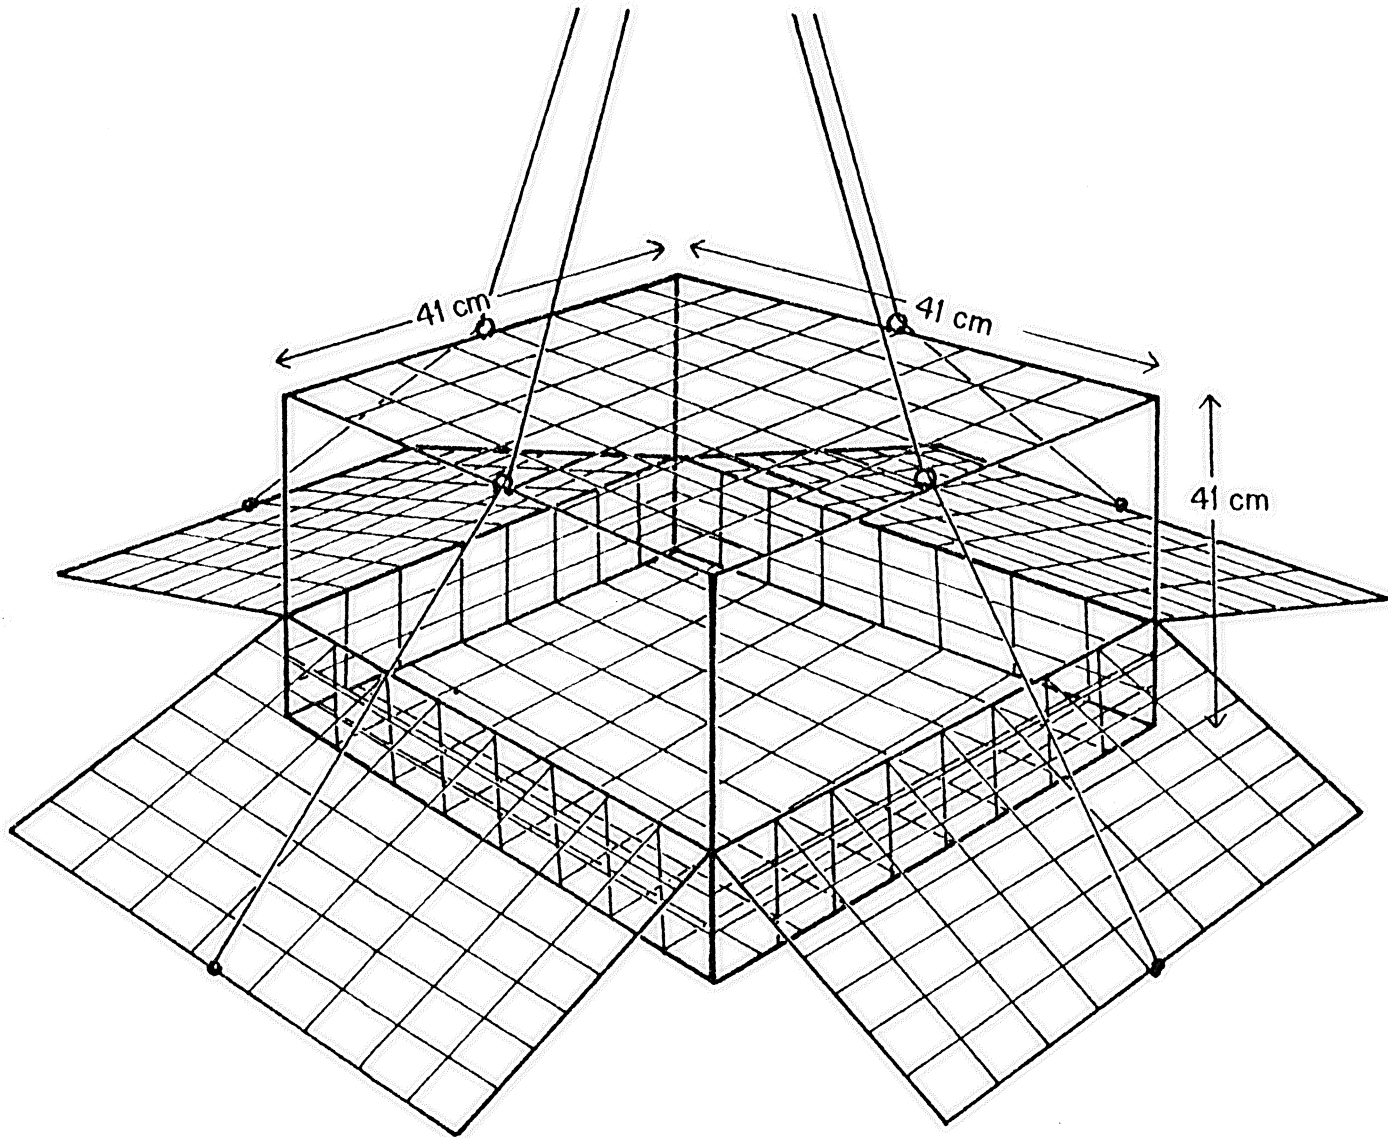


Figure 11. Type 1, Scrap Containment Device.

diameter were drilled at 5 cm intervals in the sides of a 25 liter (L) carboy (Figure 12). A 12 cm square door was cut in the side, leaving one corner attached to act as a hinge. Two 2.5 cm diameter holes were drilled in the bottom to allow water to drain as the device was retrieved from the water.

Fiberglas screening was sewn with nylon fishing line to form a tight-fitting sack enclosing the carboy. The sack was designed to tightly cover all holes and the door, and was fastened with a drawstring to the handles of the carboy (Figure 12). This fiberglas screening had 42 squares per square cm. This mesh allowed only particles smaller than 1.5 by 1.7 millimeters (mm) to escape.

The anchoring system consisted of two 7.5 kilogram (kg) base weights at each site. These base weights were attached to the two carboys by a single length of line equivalent to the maximum depth at each site, so that the anchor remained in place during container retrieval (Figure 13). One additional 1.5 kg weight was attached to the neck of each carboy. These weights were exercise weights made of Orbitron, a white plastic, and filled with sand.

Two carboys were tied together and placed at each of the three sites: Site D, E, and F. A line attached to these carboys lead to a flat, square piece of white styrofoam at the water's surface which served as the marker float. Ample line was used between the float and the carboys to pre-

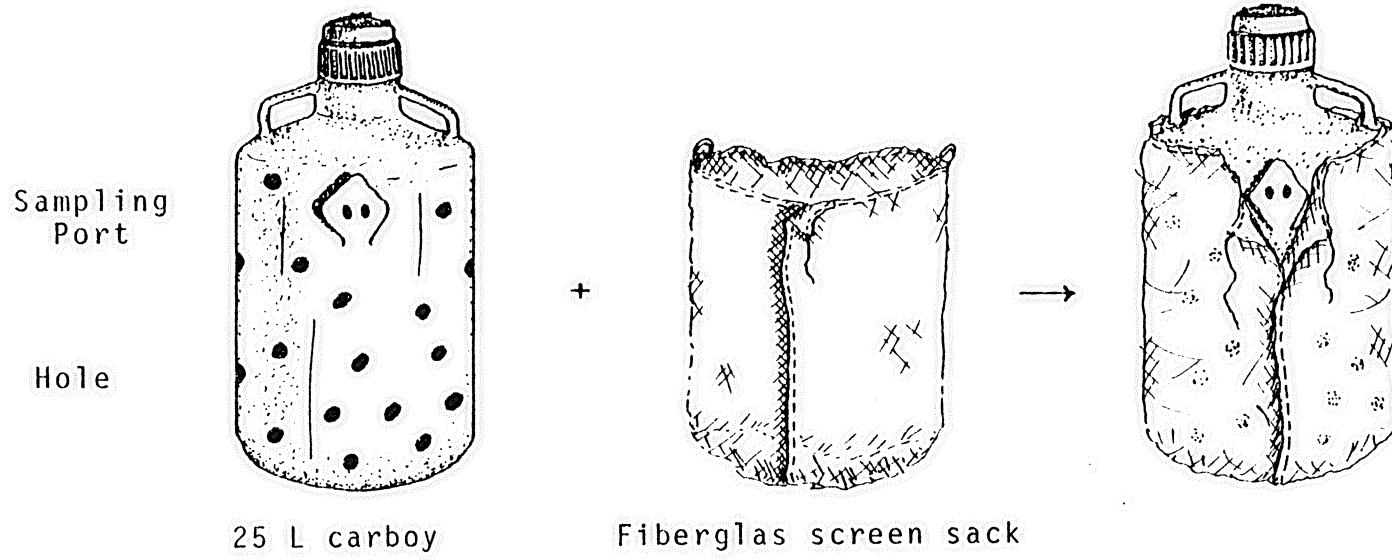


Figure 12. Type 2, Scrap Containment Device.

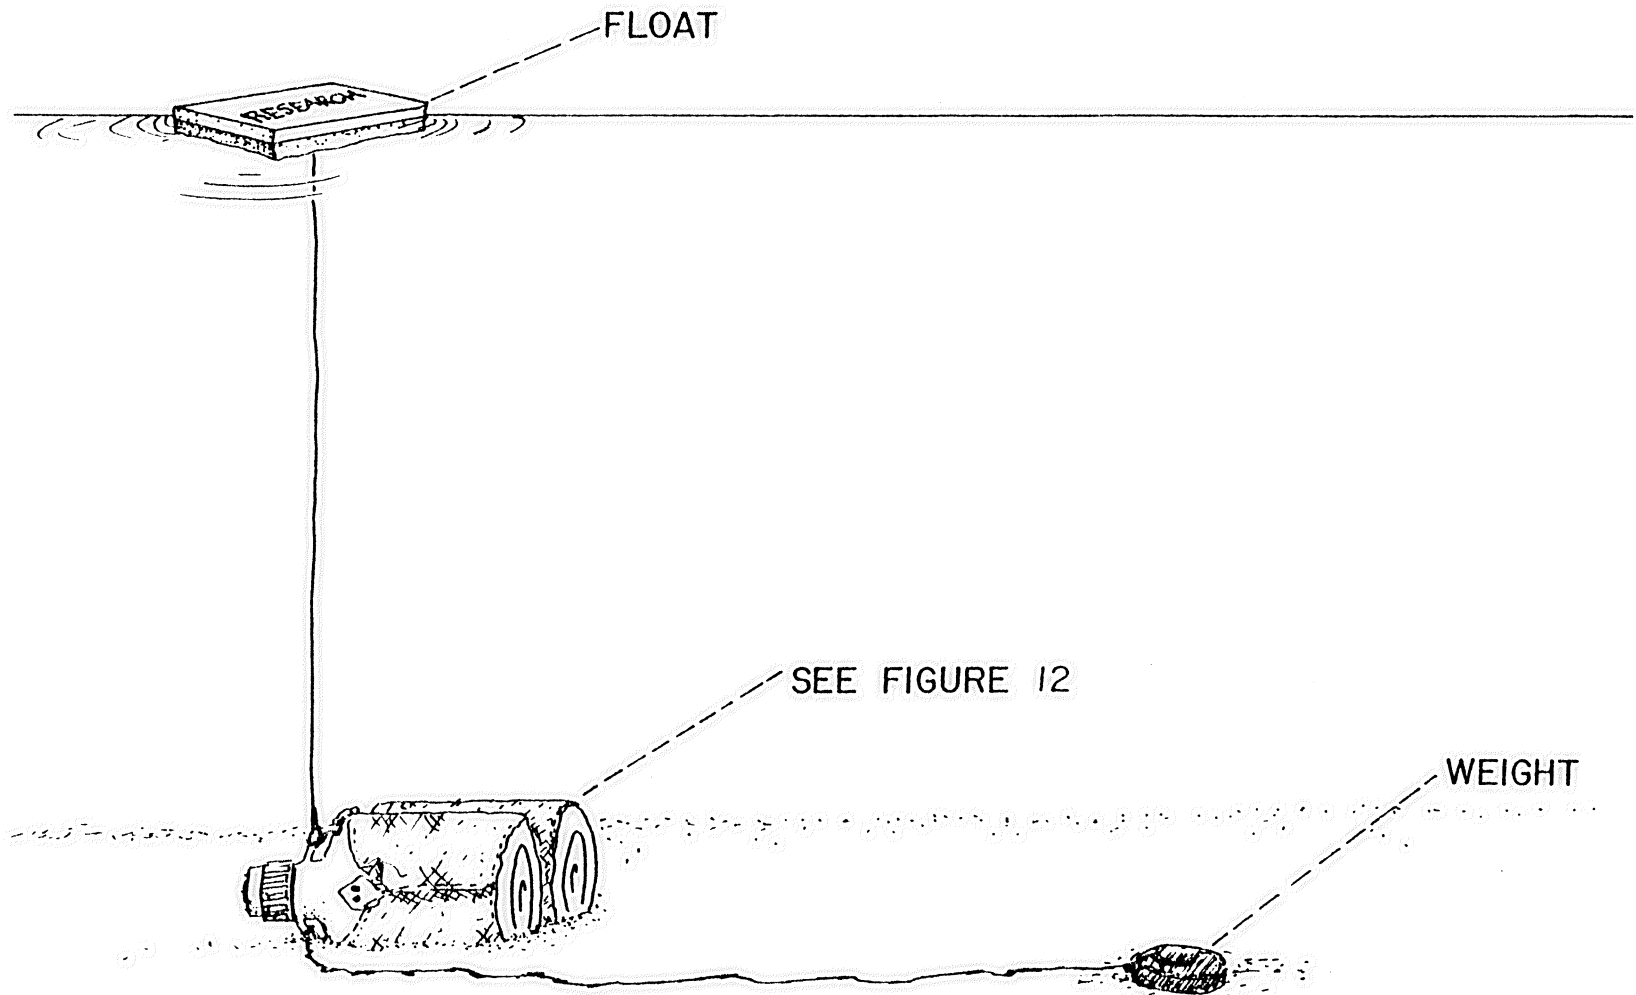


Figure 13. Anchorage of the Type 2, Scrap Containment Device.

vent the submergence of the floats at high tide.

Scrap Preparation and Deposition

Three forms of crab scrap were used in the field studies: loose, coated, and uncoated. The loose scrap was taken directly from the processing plant and not altered in any way.

The coated and uncoated scrap were prepared as follows. Loose scrap was ground in a meat grinder using a 0.25-inch cutting plate. The scrap was then weighed into 500 gram (g) quantities. These were formed, by hand, into scrap balls.

Some of the scrap balls were sprayed with a coating of a one percent (by weight) solution of Low Viscosity Kelgin (L.V., Kelco, Chicago, Illinois), an alginate. This was followed by a spray of a five percent (by weight) solution of calcium chloride (CaCl_2) in distilled, deionized water. The CaCl_2 solution causes the alginate to gel. After air drying for 30 minutes, the coated scrap balls were dry enough to handle.

The reaction which occurs between the alginate (Na_2Alg) and the CaCl_2 to cause gelling is as follows: $\text{Na}_2\text{Alg} + \text{CaCl}_2 = \text{CaAlg} + 2\text{Na}^+ + 2\text{Cl}^-$. The CaCl_2 reaction occurs first with the outer layer of alginate molecules and then slowly proceeds to the inner layers if adequate CaCl_2 is applied. The use of sprays as opposed to other methods of application

prevents the trapping of ungelled alginate beneath the outer alginate coating.

Five coated scrap balls were placed in one scrap container at each site for each of the three field studies (I, II, and III). Five uncoated scrap balls were placed in one scrap container at each site for Field Studies I and II. A 2500 g mound of loose scrap was placed in one scrap container at each site in Field Study III.

Sensory Observations

The condition of the crab scrap was visually observed at each site on each sampling date. These observations were made to determine the extent of degradation and/or dispersion of the crab scrap. Observations were made at Site A on May 2 and 15, 1982, and at Sites B and C on May 1, 2, and 15, 1982, in Field Study I. Observations were made at Site D, E, and F on June 5, 6, 15, and 27, 1982, in Field Study II, and July 17, 19, 21, and 23, 1982 in Field Study III.

Sampling Procedures

Water Sampling

The water at each site was sampled using a Van Dorn sampling bottle. Each sample was taken at a depth of 0.5 m from the bottom to avoid entraining sediment with the water

sample. After sampling, the water was placed in appropriately marked sample bottles. Water samples were taken from Site A on May 2 and 15, 1982, and Sites B and C on May 1, 2, and 15, 1982. Water samples were taken from Sites D, E and F on June 5 and 27, 1982.

Sediment Sampling

Bottom sediment samples were taken from each site using an Eckman dredge. These samples were removed from sediment which had not come in contact with the dredge, in an effort to prevent contamination from the dredge. Sediment samples were taken from Sites A, B, and C on May 2, 1982. Sediment samples were taken from Sites D, E, and F on June 5 and 15, 1982.

Scrap Sampling

The containment device was raised to the surface and once the water drained from the device, it was opened and a visual observation of the scrap was made. The scrap was then sampled with a polyethylene cup to avoid possible contamination. Scrap samples were taken from Sites D, E and F on June 5, 6, 15, and 27, 1982.

Tank Studies

Tank and Ambient Conditions

The tanks used in these studies were 114 L (30 gallon) glass aquaria. These tanks were fitted with Plexiglas lids to prevent the escape of excessive odor to the laboratory and to enhance anaerobic conditions in those tanks which were non-aerated (Figure 14). The lids were equipped with ports for sampling and venting (in the aerated tanks). The lids were sealed to the lip of the tanks with tape.

Tanks, lids, and all aeration tubing and stones were washed thoroughly with Alconox and water and then rinsed with tap water and distilled, deionized water. The tanks were then placed on laboratory tables in a location out of direct sunlight and away from windows to reduce temperature variations. Each aerated tank was equipped with rubber tubing and a single coarse aeration stone for aeration. The laboratory central air supply was filtered through glass wool filter before being introduced into the tanks.

Tanks A, B, and C

Tanks A, B, and C were used in Tank Study I and all were set up in a similar manner. Each of the three tanks was filled with 100 L of tap water. Aeration was begun and continued for 48 hours in order to dissipate the chlorine

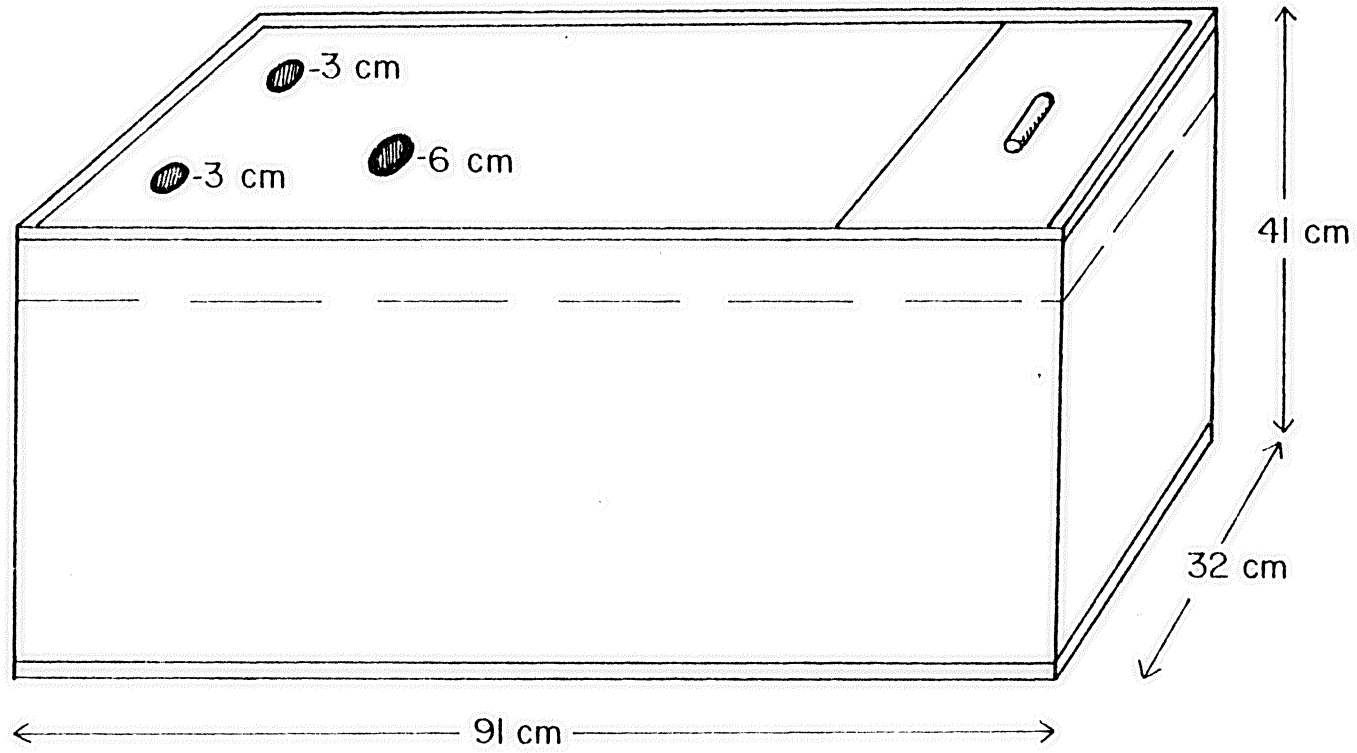


Figure 14. Configuration of the tanks and lids used in the Tank Studies.

residual, saturate the water with D.O., and allow the water to equilibrate. The tanks were then ready for the scrap.

Tanks D, E, F, and G

Tanks D, E, F, and G were used in Tank Study II. They were all filled with 100 L of saline water from the Corroto-man River. Enough sediment from Site D was then added to Tanks E and F to form a five cm layer on the bottom. The aeration stone in Tank E was positioned one inch above the sediment. Then aeration was begun in Tanks D and E. All the tanks were allowed to sit undisturbed for 48 hours to allow the sediment to settle and the systems to equilibrate.

Scrap Preparation and Deposition

Raw crab scrap was obtained from the RCV Seafood Corporation plant located in Morratico, Virginia. It was bagged at the plant immediately after picking and held at approximately four degrees centigrade (4°C) during transit to the Food Science and Technology Laboratory in Blacksburg, Virginia, where it was stored at 4°C . Three hundred grams of this raw scrap were dropped into Tank A.

A compacted scrap block was formed by cutting 300 g of the "as received" scrap into pieces smaller than ten cm square. Half of this cut scrap was placed in a cylindrical steel cell, three inches in diameter and eight inches

deep with small holes, 0.2 cm in diameter, in the sides to allow air and liquid to escape. A force of 27,600 kilopascals (4000 pounds per square inch (psi)) was then applied with a piston to compact the scrap. Pressure was released and the remainder of the cut scrap was then placed in the cylinder, on top of the other scrap. The same pressure was reapplied. During compaction, approximately 60 milliliters (ml) of fluid was lost. The weight of the scrap, after compaction, was 163 g. This compacted block was dropped into Tank B.

The compacted, coated scrap block was formed in the same manner as the compacted scrap block. However, after compaction it was then spray coated with an alginate gel. This compacted, coated scrap block was then dropped into Tank C.

Coated scrap balls were formed by the same method used to prepare the coated scrap balls for the Field Studies, except 300 g of ground scrap was used rather than the 500 g used in the Field Studies. One coated scrap ball was dropped into each of Tanks D, E, F, and G.

Analytical Observations

Measurements in Tank Study I were made on days 0, 1, 2, 3, 4, 5, and 6. The parameters measured were water temperature, D.O., turbidity, BOD₅, TOC, pH, and NH₃. The water samples for these tests were removed from the tank with a

100 ml pipet. The samples, unless otherwise specified, were removed in such a way as to be representative of the water column. This was accomplished by starting to remove the sample near the bottom of the tank and then slowly pulling the pipet up through the tank at a constant rate so that the pipet was full when it reached the surface.

The measurements for Tank Study II were made on days 0, 1, 2, 3, 5, 7, 9, 11, 13, 16, 19, 22, 29, and 36. The parameters measured were NH_3 , organic nitrogen, oxidized nitrogen ($\text{NO}_2^- + \text{NO}_3^-$), TOC, D.O., pH, turbidity, and water temperature. The water samples for these tests were removed from the tank with a 100 ml pipet. The samples, unless otherwise specified, were removed as previously described. Samples for turbidity measurements were taken from the bottom and upper portions of the tanks when the tanks visually exhibited turbidity stratification.

Sensory Observations

The sensory observations made during Tank Study I were made daily for 17 days for Tanks A and B, and for 36 days for Tank C. These observations were the appearance of the scrap, the odor of the water, and the color and appearance of the water.

The sensory observations made during Tank Study II were made on days 0, 1, 2, 3, 5, 7, 9, 11, 13, 16, 19, 22, 29,

and 36. The observations included the appearance of the scrap, the odor of the water, floating matter, biological growth, and the color and appearance of the water.

Oxygen Demand Study

The five-day biochemical oxygen demand (BOD_5) of the ground scrap and alginate was analyzed using both seawater (from the Corrotoman River) and dilution water as diluents. The dilution water used in this study was the same as the dilution water used in the BOD_5 analysis performed in the Tank Studies.

Analysis of the chemical oxygen demand (COD) of the ground scrap and alginate was performed using only distilled water as the dilution medium. Seawater was not used for the COD analysis because Standard Methods (11) indicates that the COD analysis is not accurate when the sample has a salinity greater than two parts per thousand (ppt).

For the analysis of BOD_5 in this study, the Hach Manometric BOD apparatus was used. A detailed explanation of the Hach procedure may be found in Appendix A. Predetermined weights of the ground crab scrap were placed in each of the BOD bottles and then 157 ml of either seawater or dilution water was added. The amounts of scrap used were 0.1, 0.2, 0.4, and 0.5 g when seawater was used and 0.1 and 0.4 g when dilution water was used.

Alginate solutions of 2.5 g/L and 5.0 g/L were made with dilution water. The Hach BOD analysis was then performed on each of these solutions.

The procedure outlined in Section 508 of Standard Methods was used for the analysis of COD in this study (11). For the scrap analysis, 0.05 and 0.10 g of scrap were analyzed. For the alginate analysis, solutions of 0.5 g/L and 1.0 g/L were analyzed.

Cadmium Uptake Study

The adsorptive capacity of crab shell material for Cd was studied. All of the glassware used in this study was cleaned with Alconox and water, a 50 percent hydrochloric acid (HCl) solution, a 50 percent nitric acid (HNO₃) solution, and then rinsed three times with distilled, deionized water.

Twenty-four 300 ml BOD dilution bottles were arranged on a shaker table. Clean, broken pieces of blue crab carapace were placed in the BOD bottles as follows: 0.5 g in each of three bottles, 1.0 g in each of three bottles, 2.0 g in each of three bottles, 4.0 g in each of three bottles, 8.0 g in each of three bottles, 16.0 g in each of three bottles, 32.0 g in each of three bottles, and no scrap in three bottles. A two milligram (mg) per liter solution of Cd was prepared with seawater from the Rappahannock River;

and, 200 ml of this solution were placed in each bottle. The 24 bottles were then stoppered and shaken for eight days.

Ten ml aliquots were removed from each bottle after one, two, four, six, and eight days of agitation. Each aliquot was acidified with 0.1 ml of concentrated HNO_3 and analyzed for Cd using an atomic absorption spectrophotometer in the flame detection mode.

All Studies (As Applicable)

Methods of Measurement and Analysis

Information concerning the weather conditions and tides was obtained from the United States Weather Service. The Weather Service continually broadcasts weather and tidal information on certain frequencies in the coastal areas.

Depth was measured using a sounder. This sounder was made of nylon line which was marked in half-meter increments and connected to a two-pound lead weight. The weight was lowered slowly into the water until it reached the bottom and then the depth was read at the surface.

Current velocity was measured using a pygmy current meter (Gurley Corporation, Troy, New York). These measurements were taken at a depth equal to three-fifths of the depth at the site (except Site F, where it was taken at a depth of 4 m). This depth at each site was used in an

effort to obtain the most representative current velocity at the sampling time.

Salinity was measured using a Yellow Springs Instruments Salinity, Conductivity and Temperature (YSI-SCT) meter (YSI, Yellow Springs, Ohio). This meter was calibrated at the site in distilled, deionized water. Salinity measurements were made at the site on water taken from the surface and bottom of each site. If these readings did not differ by more than one ppt, only the average value was reported.

A Secchi disk reading was made at each site to determine the transparency of the water. A 12-inch Secchi disk attached to a nylon line marked in half-meter increments was used.

The pH of the water was measured using a Fisher Model 640 Accumet Mini pH/mV Meter. Measurements of pH were made in the field on both surface and bottom water samples. If these readings did not differ more than 0.5 pH units, only the average value was reported. The pH readings in the Tank Studies were taken three inches below the water's surface.

Water temperature and D.O. were measured using a YSI D.O. and temperature meter (YSI, Yellow Springs, Ohio). This instrument was calibrated in ambient air before use. In the field studies, the probe was weighted with a one pound lead weight. At Sites A, B, and C, the D.O. of bottom water samples was determined. For Sites D, E, and F,

D.O. readings were taken at depths of 0.5 and 1 m, and 1 m intervals thereafter.

The alkalinity analysis was performed in the field and laboratory according to Section 403 of Standard Methods (11).

The remaining measurements and analyses were conducted using samples which were taken from the field sites or the tanks and preserved. Each sample, with the exception of the TOC sample, was placed in a polyethylene container and then preserved in the manner appropriate for the analysis to be made. The TOC samples were placed in clean glass jars which could be capped to prevent contamination.

All samples were kept at a temperature of 4°C until the analyses were performed. All equipment was calibrated in accordance with manufacturers specifications.

Samples to be analyzed for ammonia and $\text{NO}_2^- + \text{NO}_3^-$ were preserved with 0.2 ml of 1 molar (M) HCl per 200 ml of sample. This preservation technique was suggested in the manual provided with the Orion ammonia probe.

To measure the ammonia concentration, 10 ml of sample were placed in a screw-top vial with a stir bar and 0.2 ml of 10 M NaOH was added. The Orion ammonia probe was inserted and the "actual" ammonia concentration in mg/L as N was read from the Orion 407A specific ion meter. To analyze for the $\text{NO}_2^- + \text{NO}_3^-$ levels (12), 0.2 g of Devarda's alloy was placed in a 25 ml glass vial with a screw top which contained

10 ml of sample and 0.2 ml of 10 M NaOH. This vial was then capped, placed on a shaker table and agitated for 20 minutes. It was then placed in a water bath at room temperature for ten minutes to allow the sample to equilibrate. A stir bar and the ammonia probe were then placed in the vial and a reading in mg/L as N (reading = total ammonia concentration = $\text{NH}_3 + \text{NO}_2^- + \text{NO}_3^-$) was taken while the solution was stirred. The $\text{NO}_2^- + \text{NO}_3^-$ concentration in mg/L as N was calculated by subtracting the "actual" ammonia concentration reading from the total ammonia concentration reading. This difference was the amount of NH_3 which had been produced by the reduction of $\text{NO}_2^- + \text{NO}_3^-$.

Samples to be analyzed for organic N were preserved with 0.2 ml of concentrated sulfuric acid (H_2SO_4) per 200 ml of sample as suggested in Section of 420B of Standard Methods (11). The concentration of organic N in mg/L as N was determined by first analyzing for the total Kjeldahl N (TKN) in the sample. This was done using the micro Kjeldahl procedure as described in Section 420B of Standard Methods (11). The organic N concentration in mg/L as N was then calculated by subtracting the ammonia concentration from the TKN value.

The turbidity of the samples was measured using a Hach turbidimeter and the manufacturer's recommended procedure.

Water samples taken during Tank Study I were analyzed for BOD_5 using the method outlined in Section 507 of

Standard Methods (11). The seed for the dilution water used in this analysis was obtained from laboratory-scale biological reactors which were seeded with municipal sewage and maintained on solutions of dog food.

Water samples analyzed for TOC were preserved by the addition of 0.1 ml of concentrated phosphoric acid (H_3PO_4) per 50 ml of sample (11). These samples were then analyzed using an Oceanographic TOC analyzer (Oceanographic Instrument Corporation, College Station, Texas).

Water samples for the analysis of selected metals were preserved by adding 1 ml of concentrated HNO_3 per liter of sample (11). These samples were then analyzed for Pb, As, Cd, Hg, and Zn using an atomic absorption spectrophotometer.

Sediment samples taken in Field Study II were processed in the following manner prior to an analysis for associated Cd, Zn, Hg, Pb, and As levels. The sediment was placed in a cardboard box and placed on a shelf in the laboratory to allow the samples to air dry for two weeks. Several 1.5 g portions of the air-dried sediment were placed in 50 ml centrifuge tubes. Thirty ml of 0.5 M HCl were added to each tube. Each tube was then stoppered and placed on a shaker table and agitated for 12 hours at room temperature. After agitation, the tube was removed and centrifuged at 600 revolutions per minute (rpm) for three minutes. The supernatant was then analyzed for Cd, Zn, Hg, Pb, and As using the

atomic absorption spectrophotometer.

Shell samples taken in Field Study II were processed in the following manner. The shell was rinsed with a 0.5 M NaOH solution to remove any residual tissue. It was then rinsed five times with distilled, deionized water and placed in 50 ml beakers. These beakers were dried at 103°C until a constant weight was obtained. After drying, the shell was stored in sealed containers. For analysis, 1.0 g of dry shell was placed in a 50 ml beaker and 6 ml of ultra pure HNO₃ (Ultrex, Baker Chemical Company, New Jersey) were added. This mixture was placed on a hot plate under an exhaust hood and heated until the liquid evaporated. Once the beaker had cooled, another 6 ml of ultra pure HNO₃ was added and the beaker was covered with a watch glass and heated slowly until a reflux condition was reached. Refluxing was allowed to continue until the solution had evaporated. The watch glass was then rinsed into the beaker with 2 ml of 0.5 percent ultra pure HNO₃. This liquid was poured into a graduated tube. The beaker was rinsed five times, each time with 1 ml portions of ultra pure HNO₃ which were also poured into the graduated tube. An additional 3 ml of 0.5 percent ultra pure HNO₃ was then added to the tube, bringing the total volume in the tube to 10 ml. The tube was then sealed with parafilm and the sample was analyzed within one week for Cd and Zn.

IV. RESULTS

The results of the four major areas of this research are covered in individual sections of this chapter. The first section contains data from the three field studies. The second section contains the results of the two tank studies. The third section contains data from the analysis of the COD and BOD of both the alginate and scrap. The fourth section contains data obtained from the Cd adsorption study.

Field Studies

These studies are presented in the sequence in which they were undertaken. For each field study, the sites are first characterized by weather, tidal, and water quality data. This site characterization is followed by a description of the appearance of the crab scrap. In Field Study II, the concentrations of selected metals present in the water, bottom sediment, and scrap shells are also given.

Field Study I

Characterization of Sites

The characteristics and water quality data for each of the three sites used in this study can be found in Table II. These data indicate that the water at the three sites contained only trace amounts of total organic carbon, selected

TABLE II. CHARACTERISTICS OF FIELD SITES A, B, AND C

	<u>Site A</u>		<u>Site B</u>			<u>Site C</u>		
Date Sampled	5/2/82	5/15/82	5/1/82	5/2/82	5/15/81	5/1/82	5/2/82	5/15/82
Time Sampled	1100	1630	1550	1310	1945	1950	1430	1830
Sky Conditions	Cldy	Clear	Clear	Rain	Clear	Clear	Stmy	Clear
Seas	Chpy	Chpy	Chpy	Calm	Calm	Calm	Calm	Calm
Time of the Tide, EST								
High	0540	1528	1714	1813	1528	1714	1813	1528
Low	1203	2127	1102	1203	2127	2323	1203	2117
Depth (m)	3.0	5.2	3.2	2.8	2.5	2.5	1.5	2.0
Velocity (m/sec)	-	7.8	-	-	9.6	-	-	6.0
Salinity (ppt)	20.0	18.6	19.2	13.9	14.2	12.0	10.8	10.6
Secchi (m)	1.5	3.0	1.2	1.2	1.0	0.8	0.5	0.5
Surface pH	8.2	8.3	8.2	8.2	8.4	8.2	8.0	7.2
Water Temp. ($^{\circ}$ C)	15	18	18	16	18	17	18	22
D.O. (mg/L)	9.0	7.0	9.3	7.9	8.2	8.8	7.6	7.0

Table II. Continued

	<u>Site A</u>			<u>Site B</u>			<u>Site C</u>		
Organic N (mg/L as N)	<4	<4	<4	<4	<4	<4	<4	<4	
Ammonia (mg/L as N)	<1	<1	<1	<1	<1	<1	<1	<1	
NO ₂ ⁻ + NO ₃ ⁻ (mg/L as N)	<1	<1	<1	<1	<1	<1	<1	<1	
Alka. (mg/L as N)	-	70	-	-	71	-	-	70	
TOC (mg/L)	<10	11.9	11.5	<10	12.2	11.6	14.5	12.2	
Turbidity (NTU)	3.7	3.8	3.8	3.1	4.5	7.2	5.8	8.8	
Metals									
Lead (mg/L)	<50	<50	<50	<50	<50	<50	<50	<50	
Arsenic (mg/L)	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	1.4	
Mercury (mg/L)	2.3	2.0	2.2	0.4	0.2	0.3	0.9	6.2	
Cadmium (mg/L)	<0.002	<0.002	<0.002	<0.002	<0.002	<0.002	<0.002	<0.002	
Zinc (mg/L)	<0.005	<0.005	0.013	0.008	0.010	0.036	0.037	0.041	
Bottom Type	Sand			Mud			Muck		

metals, and nitrogen containing compounds. The concentrations of TOC found at the sites ranged from 10 to 14.5 mg/L. The concentrations of ammonia, organic nitrogen, $\text{NO}_2^- + \text{NO}_3^-$ were all below the detectable limits of 1 mg/L for ammonia and $\text{NO}_2^- + \text{NO}_3^-$ and 4 mg/L for organic nitrogen. (The concentrations of Pb, As, Hg, and Cd were less than 50 mg/L; less than 1.5 mg/L; less than 6.3 mg/L; less than 0.042 mg/L, respectively.) These data indicate that the water at the three sites was of good quality. These data also show that water depth and current velocity were variable.

Appearance of Scrap

The initial (after 24 hours) inspection at Site A was impractical due to adverse weather conditions.

At Site B, after 24 hours of exposure, three of the five uncoated scrap balls had separated into small pieces, while two were intact. Two of the five coated scrap balls had separated into halves which were still well compressed. Three were intact.

At Site C, after 24 hours of exposure, all of the uncoated scrap balls were still intact. Two of the coated scrap balls were intact, while two had separated into halves and one was missing.

All three sites were inspected 13 days after the initial (24 hours) inspection. At Site A and Site B the con-

tainment devices could not be located. The control containment device which had been placed at Site B was found 50 yards from its original position and had become entangled in sunken wreckage. This seemed to indicate that strong tidal currents may have relocated the other containment devices. The containment devices were found to be in place at Site C. No scrap was found in either device and the bottom of both devices had become filled with a two-inch layer of muck.

Field Study II

Characterization of Sites

The characteristics and water quality data for each of the three sites used in this study can be found in Table III. These data indicate that the water at the three sites contained trace amounts of total organic carbon, selected metals, and nitrogen-containing compounds. The concentrations of TOC at the sites were consistently below the level of 10 mg/L. The concentrations of organic nitrogen, ammonia, and $\text{NO}_2^- + \text{NO}_3^-$ were all below detectable limits. These data indicate that the water at the three sites was of good quality. The site depths at the sites ranged from a low of 4.0m at Site D to a high of 10.5m at Site F. The salinity at each of the sites remained nearly constant at 14 ppt. Figures 14, 15, 16, 17, 18, and 19 show that temperature and dissolved oxygen varied with depth at the three sites. The

TABLE III. CHARACTERISTICS OF FIELD SITES D, E, AND F

	Site D		Site E		Site F	
Date Sampled	6/5/82	6/27/82	6/5/82	6/27/82	6/5/82	6/27/82
Time Sampled	1615	1230	1730	1145	1830	1040
Sky Conditions	P.Cldy	Cldy	P.Cldy	P.Cldy	P.Cldy	P.Cldy
Seas	Calm	Sl.Chop	Calm	Calm	Calm	Calm
Time of Tides						
High	1636	1642	1636	1642	1636	1642
Low	2300	1024	2300	1024	2300	1024
Depth (m)	4.5	4.0	6.0	5.0	10.5	10.0
Temperature	Fig.15	Fig.16	Fig.17	Fig.18	Fig.19	Fig.20
Dissolved Oxygen	Fig.15	Fig.16	Fig.17	Fig.18	Fig.19	Fig.20
pH	7.7	8.3	7.5	8.0	7.5	7.8
Salinity (ppt)	14.0	13.8	14.0	14.3	14.0	14.2
Secchi (m)	1.0	1	1.0	1	1.5	1.2
Velocity (m/sec)	0.9	1.2	2.2	2.2	4.2	0.9
Organic N (mg/L as N)	<4	<4	<4	<4	<4	<4
Ammonia (mg/L as N)	<1	<1	<1	<1	<1	<1
NO ₂ ⁻ + NO ₃ ⁻ (mg/L as N)	<1	<1	<1	<1	<1	<1
Alka. (mg/L as CaCO ₃)	51.8	50.0	50.4	49.3	50.2	49.7
TOC (mg/L)	10	10	10	10	10	10
Turbidity (NTU)	2.7	3.2	1.7	3.7	1.9	3.3
Bottom Type	Muck		Muck		Muck	

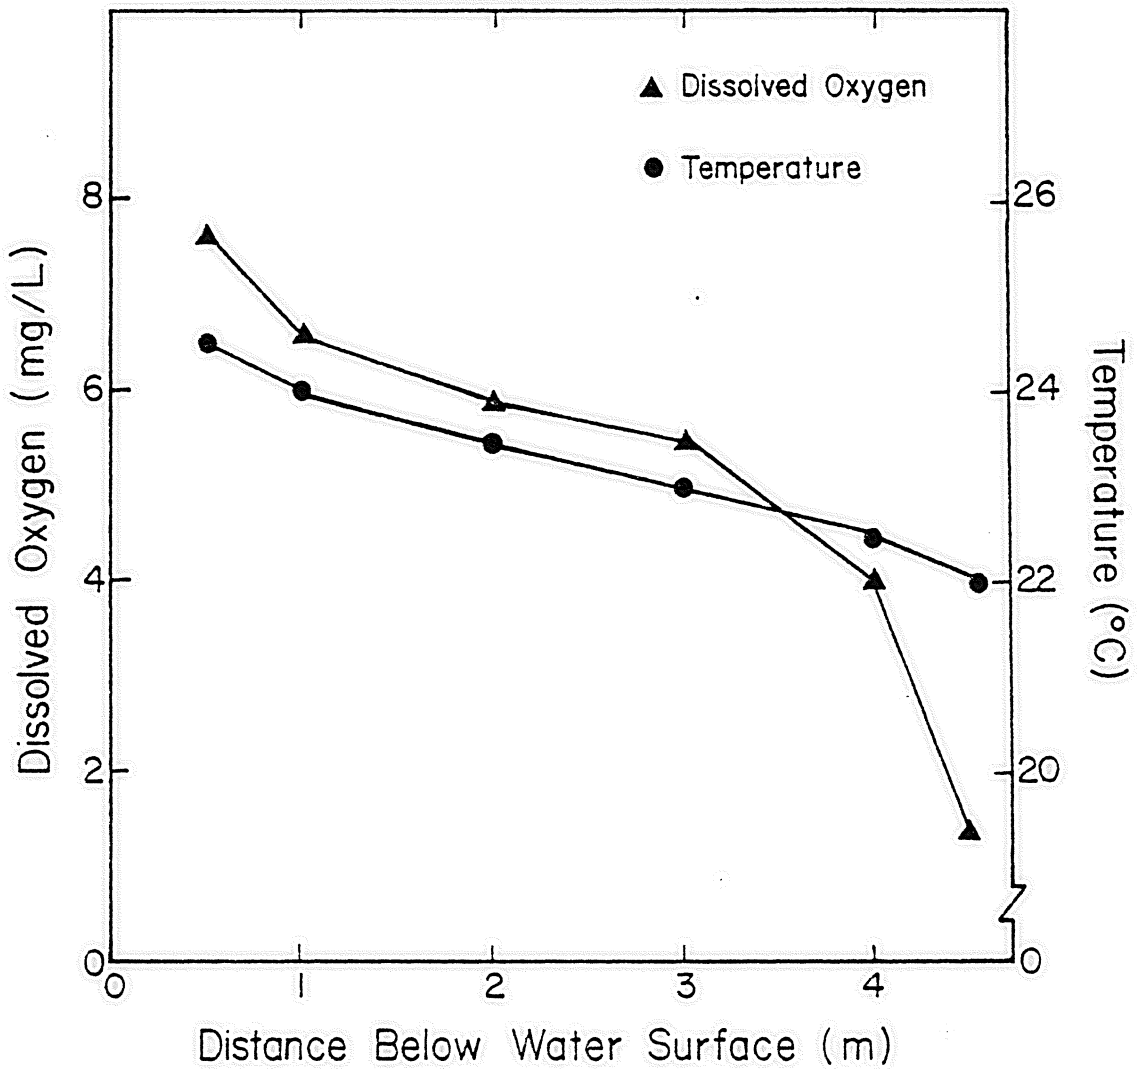


Figure 15. Water temperature and dissolved oxygen variations with depth at Site D at 1615 hours on 5 June 1982.

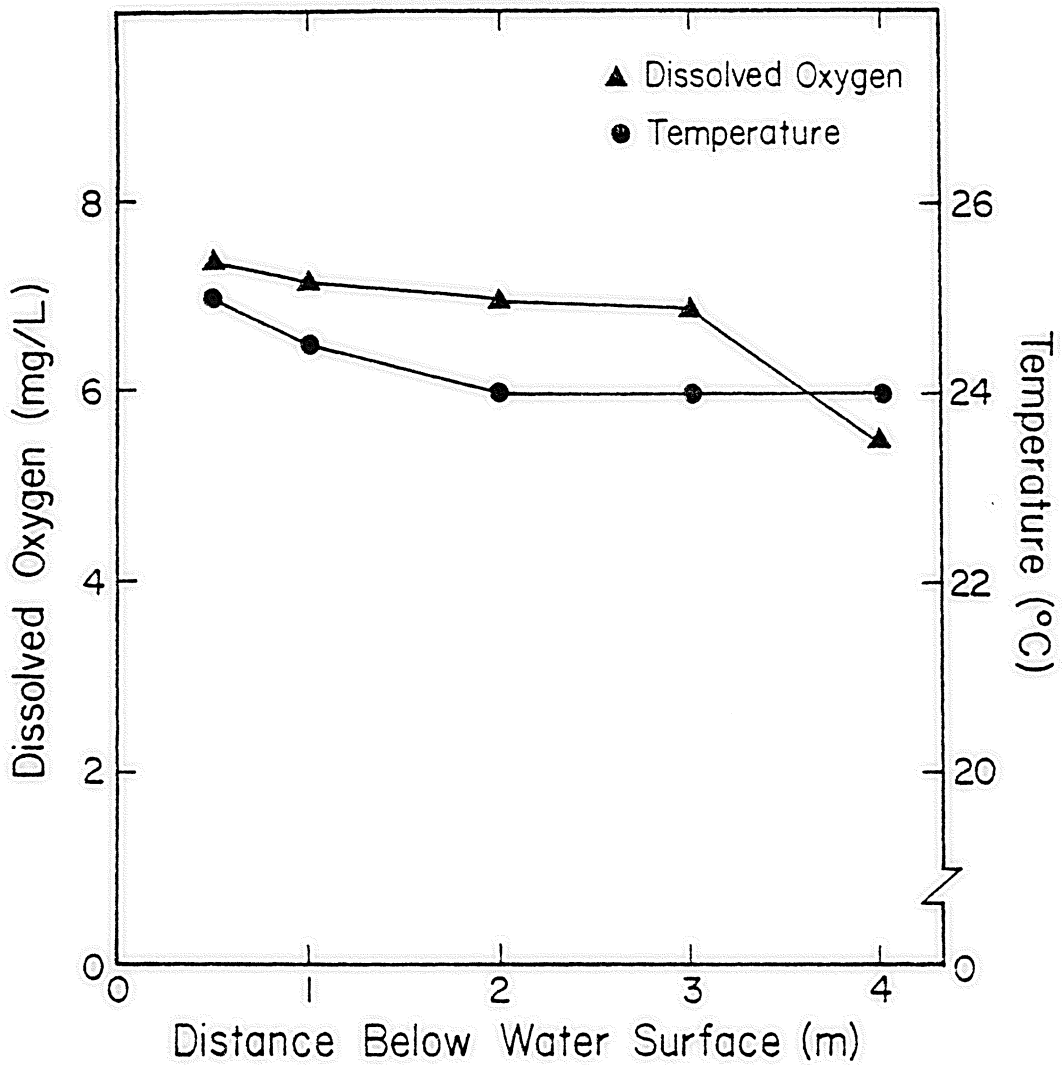


Figure 16. Water temperature and dissolved oxygen variations with depth at Site D at 1230 hours on 27 June 1982.

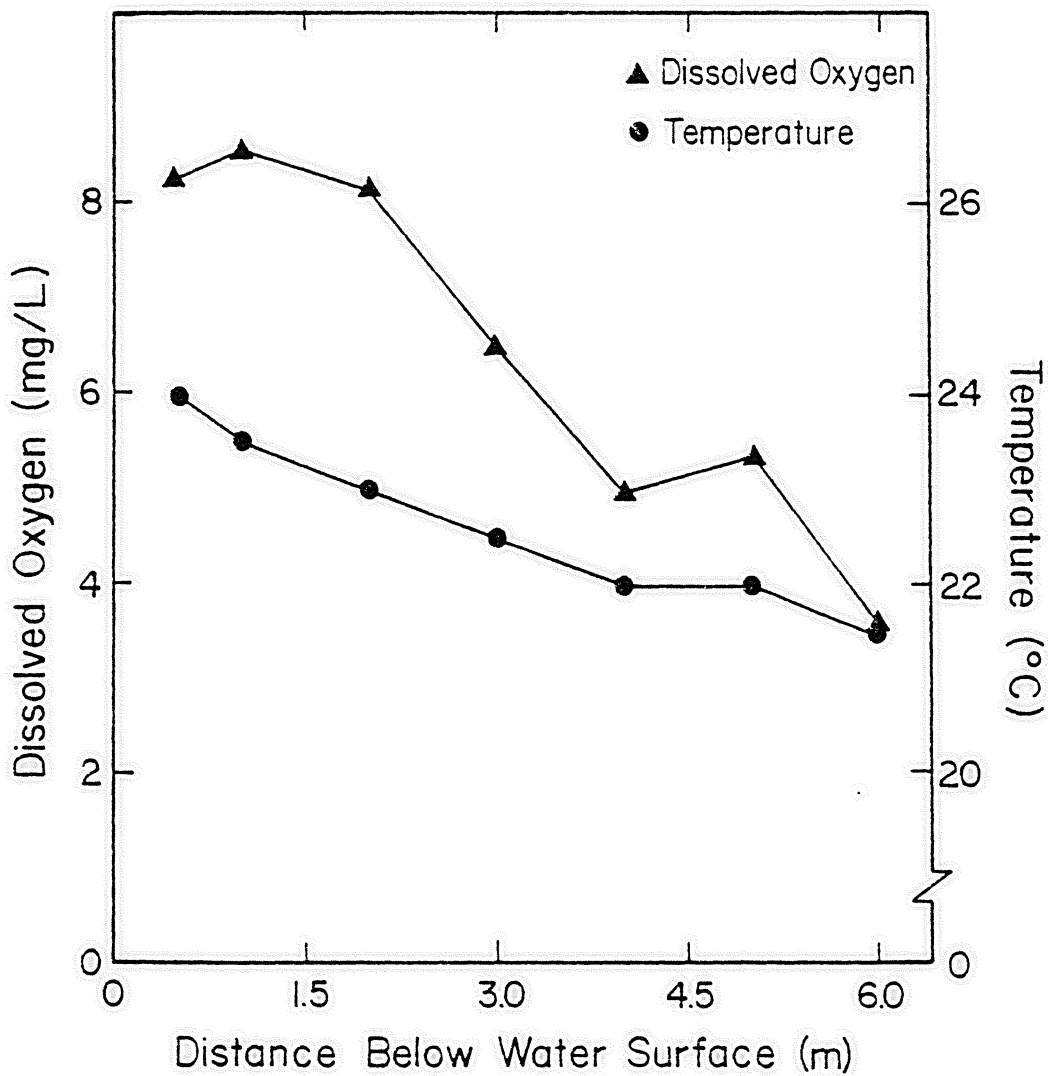


Figure 17. Water temperature and dissolved oxygen variations with depth at Site E at 1730 hours on 5 June 1982.

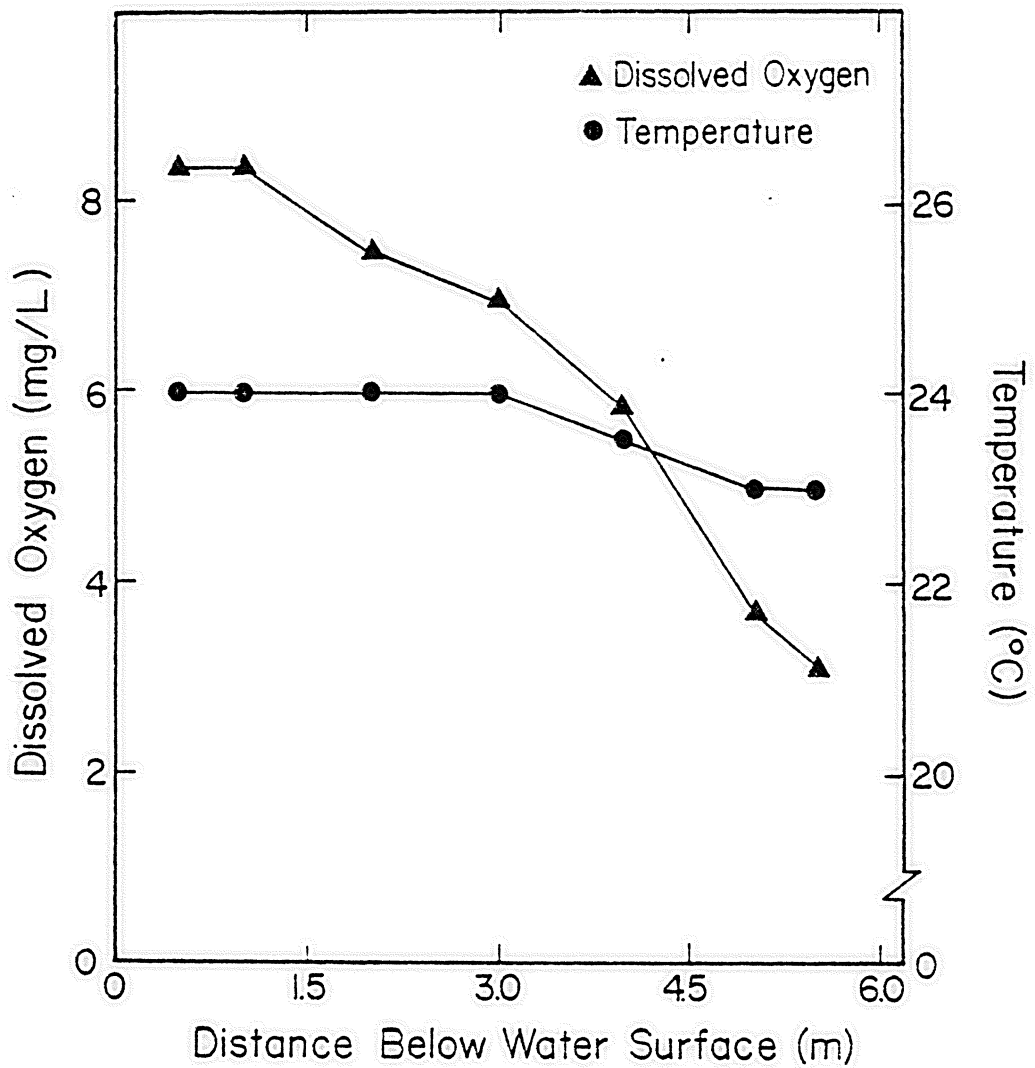


Figure 18. Water temperature and dissolved oxygen variations with depth at Site E at 1145 hours on 27 June 1982.

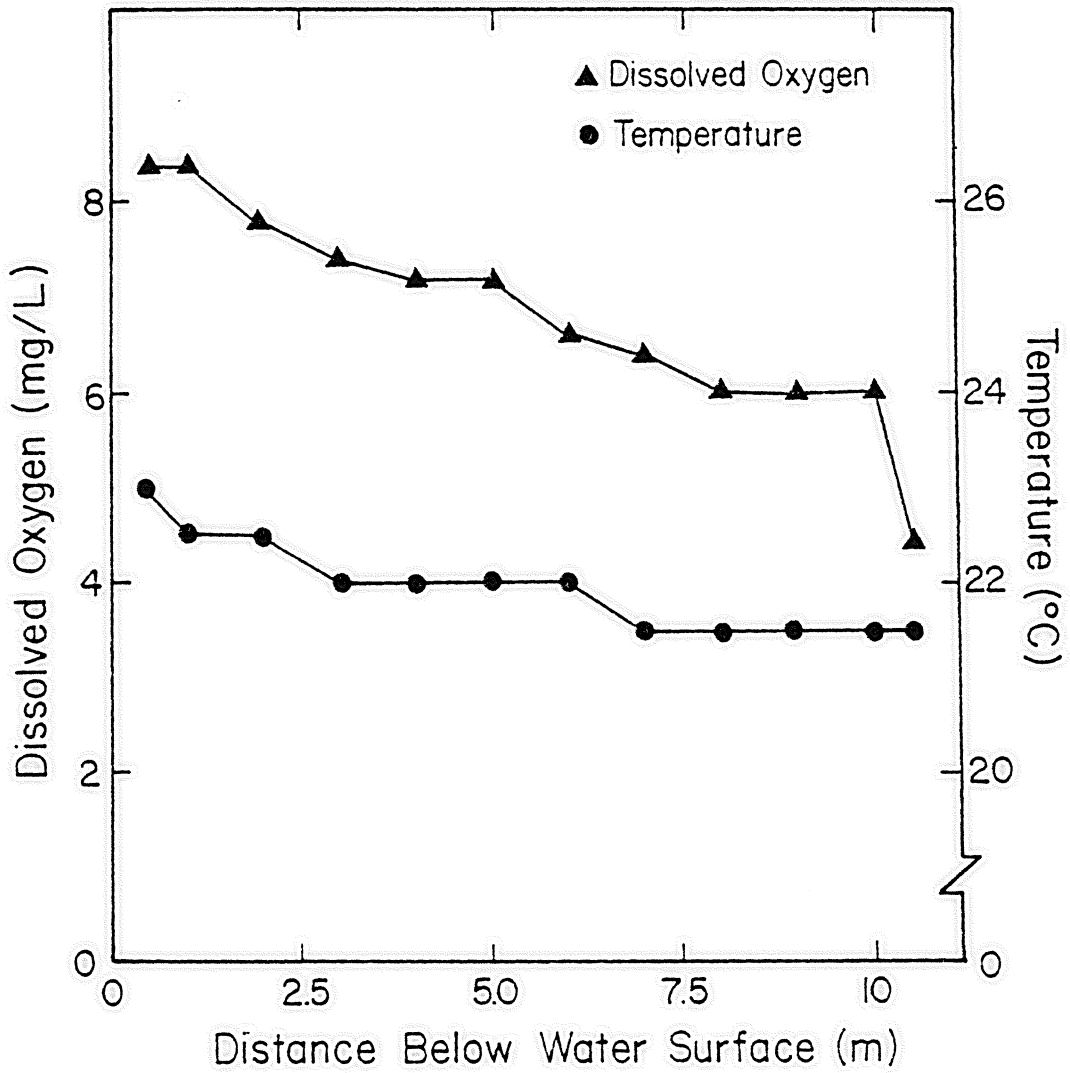


Figure 19. Water temperature and dissolved oxygen variations with depth at Site F at 1820 hours on 5 June 1982.

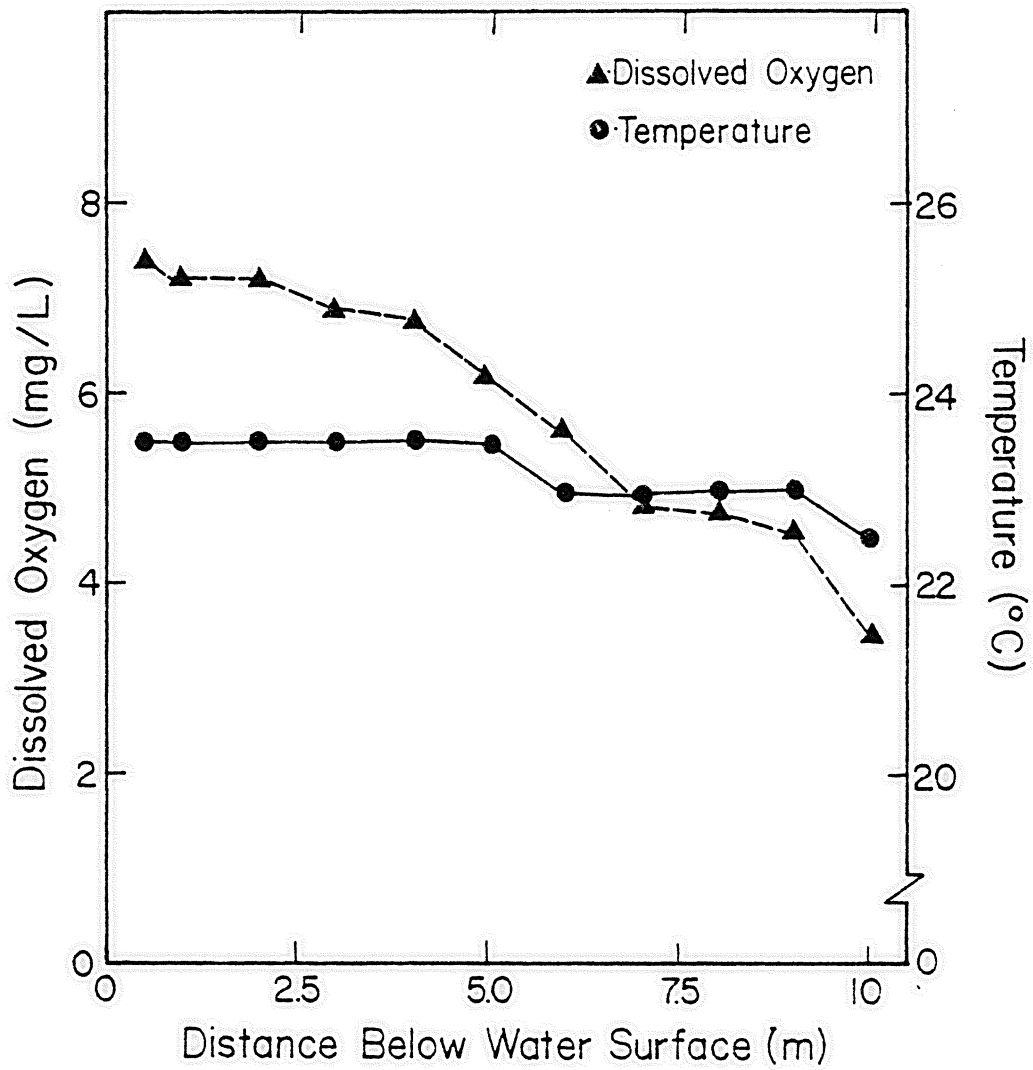


Figure 20. Water temperature and dissolved oxygen variations with depth at Site F at 1040 hours on 27 June 1982.

most drastic variation in D.O. occurred on 25 June 1982 at Site D. At a depth of 0.5 m below the surface, the D.O. was 7.8 mg/L while at a depth of 4.5 m, the D.O. was 1.4 mg/L. Sites E and F showed similar variations on 25 June 1982.

Appearance of the Scrap

Following 24 hours of exposure to the marine environment at the three sites, all of the scrap balls, both coated and uncoated, had disintegrated. It appeared as though only 50 percent of the tissue remained in the containment devices. All of the shell material seemed to remain in the devices. After ten days of exposure, the devices at all three sites contained only shell material.

The concentrations of selected metals can be found in Table IV. Figure 21, shows the amounts of Cd and Zn which were found in the water, sediment, and shell.

The concentrations of Zn in the sediment increased by less than ten percent at the three sites from 5 June 1982 to 15 June 1982. The concentrations of Cd in the sediment increased by 30 percent at Site D, by 55 percent at Site E, and showed no increase at Site F over the same time period.

The concentrations of Zn and Cd in the crab shell decreased over 50 percent at all sites over the ten day period of 5 June 1982 to 15 June 1982. The largest decrease was at Site F where the concentration of Zn was 1.5 mg/g.

TABLE IV. THE CONCENTRATIONS OF VARIOUS METALS FOUND IN THE WATER, SEDIMENT AND SHELL AT SITES D, E, AND F ON SELECTED DAYS IN JUNE OF 1982

	<u>SITE D</u>	<u>6/5</u> <u>SITE E</u>	<u>SITE F</u>	<u>SITE D</u>	<u>6/6</u> <u>SITE E</u>	<u>SITE F</u>	<u>SITE D</u>	<u>6/15</u> <u>SITE E</u>	<u>SITE F</u>
WATER									
Pb(mg/L)	<50	<50	<50	<50	<50	<50	<50	<50	<50
As(mg/L)	<0.5	1.3	<0.5	<0.5	1.0	1.4	0.6	0.7	1.4
Hg(mg/L)	4.1	<0.2	<0.2	0.3	<0.2	<0.2	<0.2	<0.2	<0.2
Cd(mg/L)	<0.002	<0.002	0.003	0.005	0.005	0.006	<0.002	<0.002	0.004
Zn(mg/L)	0.010	0.005	0.005	0.014	0.007	0.076	0.015	0.003	0.010
SEDIMENT									
Pb(mg/g)	0.0013	0.0016	0.0017	-	-	-	0.0013	0.0017	0.0016
As(mg/g)	0.152	0.170	0.230	-	-	-	0.146	0.223	0.242
Hg(mg/g)	0.004	0.007	0.006	-	-	-	0.003	0.004	0.006
Cd(mg/g)	0.018	0.024	0.029	-	-	-	0.030	0.053	0.027
Zn(mg/g)	3.63	4.36	4.52	-	-	-	3.95	4.62	4.86
SHELL									
Cd(mg/g)	0.009	0.009	0.101	0.009	0.007	0.009	0.005	0.005	0.007
Zn(mg/g)	2.6	2.4	2.3	2.1	2.2	2.5	1.2	0.8	0.8

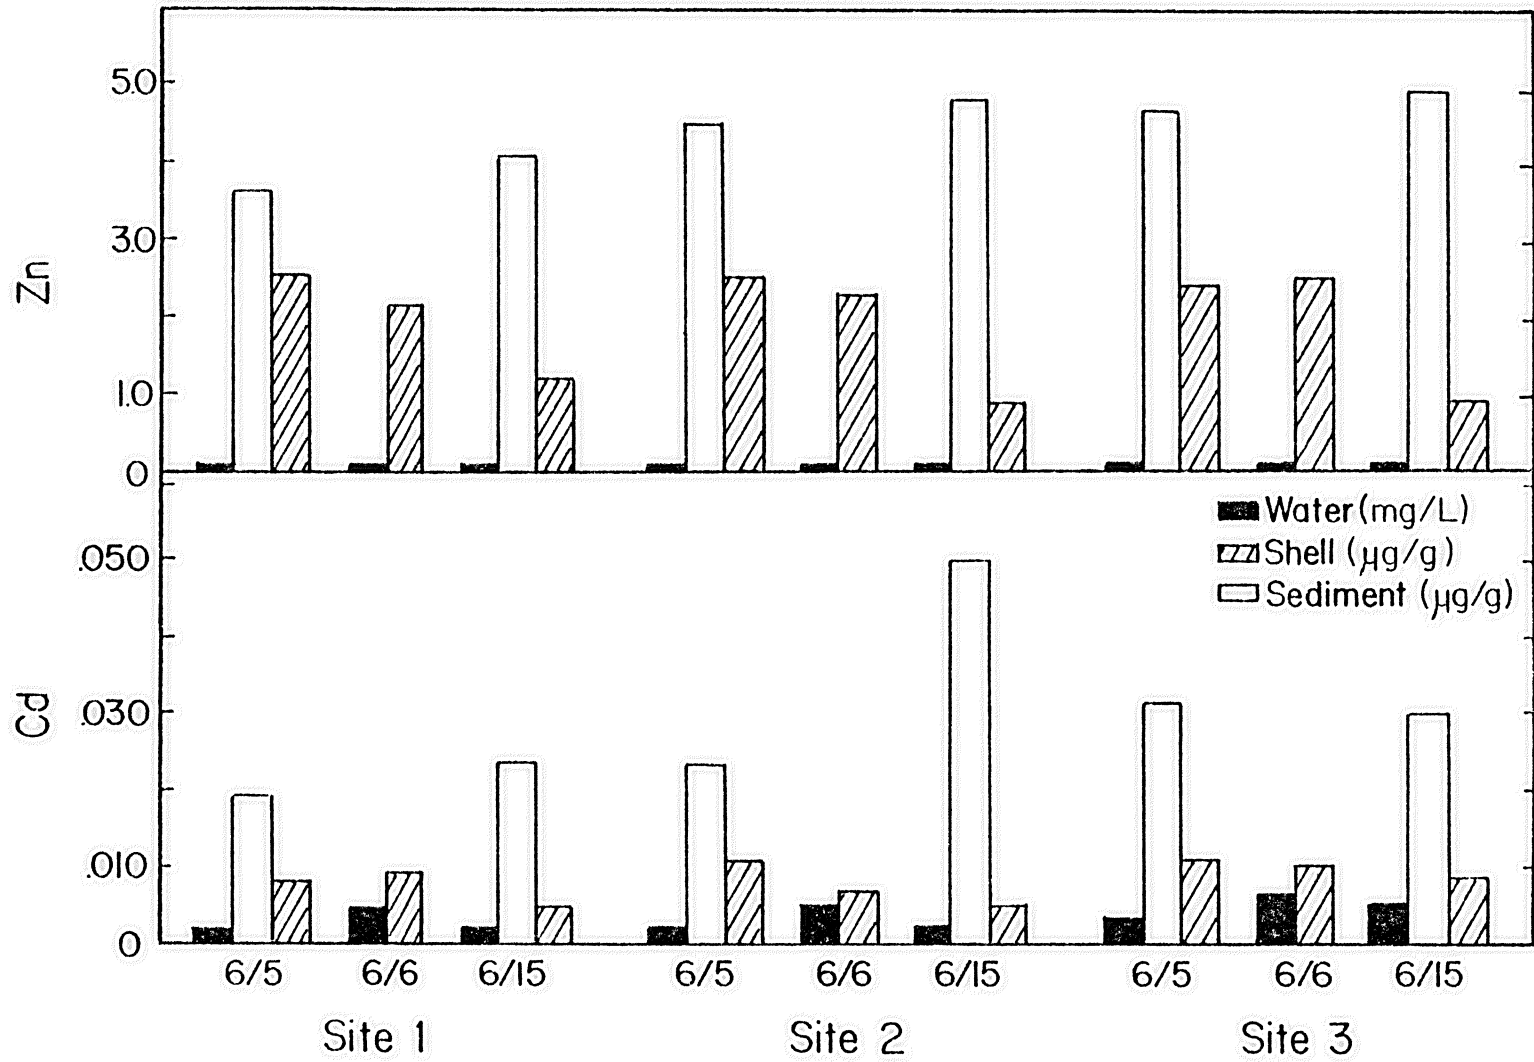


Figure 21. Concentrations of Cd and Zn found in the water, sediment and shell at Sites D, E, and F.

The concentration of Cd in the crab shell also showed a definite, but not as drastic a decrease. This decrease ranged from approximately 25 percent at Site F to 50 percent at Site E.

The concentration of Zn in the water at the three sites remained constant at 0.2 mg/L. The concentration of Cd at each site increased by at least 50 percent from 5 June 1982 to 6 June 1982, but then decreased back to the levels measured on 5 June by 15 June 1982. The maximum concentration of Cd measured in the water was 0.005 mg/L.

Field Study III

Characteristics of Sites

The three sites used in this study are the same as those used in Field Study II. The site characteristics and water quality data may be found in Table III.

Appearance of Scrap

After two days of exposure, all of the scrap balls at each site had disintegrated and approximately 50 percent of the tissue remained. The unground, uncompacted scrap at each site was still intact with 75 percent of the tissue remaining after two days. At the end of four days of exposure, only 30 percent of the tissue from the scrap balls remained. Whereas, after four days, approximately 50 percent of the

tissue remained on the unground shells at each site and the integrity of the shell material seemed to have been diminished. After six days, no tissue from the scrap balls remained and only trace amounts of tissue remained on the unground crab shells at each site. The unground shell material appeared "pitted" as if something had been removed. When finger pressure was gently applied to the shell, it crumbled easily.

Tank Studies

Tank Study I

In this study three different forms of crab scrap were immersed in tanks of aerated, dechlorinated tap water. Tank A contained loose scrap, Tank B contained compacted scrap, and Tank C contained compacted, coated scrap. Both analytical and sensory observations of change were made.

Sensory Observations

The appearance of the scrap, the odor of the water, and the color and appearance of the water were the sensory observations made. These observations were made daily and a detailed listing can be found in Table V.

In comparing the three methods of scrap preparation through sensory observations, the following information was

TABLE V. SENSORY OBSERVATION MADE DURING TANK STUDY I.

COLOR AND APPEARANCE OF THE WATER					
TANK A		TANK B		TANK C	
Day 0	The water became turbid upon addition of the loose scrap	Day 0	The water was very clear after addition of the compacted scrap.	Day 0	The water remained clear after addition of the scrap.
Day 1	Clarity of the water had decreased significantly.	Day 1	Water clarity decreased rapidly.	Day 1	The water was slightly turbid.
Day 2	The water within one inch of the scrap had taken on an orange-yellow hue.	DAY 2	The water was translucent.	Day 2 - 3	Water clarity was moderate.
Day 3	The bottom two inches of water was orange-yellow.	Day 3 - 4	The water clarity continued to decrease. An orange-yellow color had appeared.	Day 4 - 24	The water was translucent.
Day 4 - 9	The water was extremely turbid throughout the tank, but the color had disappeared.	Day 5 - 9	The water was still translucent, but the color had disappeared.		
Day 10	The turbidity agglomerated and began to settle. Water clarity had increased markedly.	Day 10 - 17	Visibility was increasing daily.	Day 25 - 34	Water clarity was increasing.
Day 11 - 17	The water appeared very clear.			Day 35	No odor was detected.

TABLE V. CONTINUED.

ODOR OF THE WATER					
TANK A		TANK B		TANK C	
Day 0	No detectable odor was noticed.	Day 0 - 2	No odor was detected.	Day 0 - 3	No odor was detected.
Day 1	Slightly offensive odor was detected.				
Day 2	Odor had become very offensive.				
Day 3	Putrid odor was noted. Began to smell like 'natural' gas.	Day 3	Offensive odor was noticed.		
Day 4	Odor decreased.	Day 4	Odor decreased	Day 4 - 24	Only a slight odor was detected.
Day 5 - 9	Odor continued to decrease.	Day 5 - 9	Odor continued to decrease.		
Day 10 - 17	No odor detected.	Day 10 - 17	No odor was detected.	Day 25 - 34	The odor was slight, no offensive.
				Day 35	No odor was detected.

TABLE V. CONTINUED.

		APPEARANCE OF SCRAP			
<u>TANK A</u>		<u>TANK B</u>		<u>TANK C</u>	
Day 0	The majority of the scrap sunk immediately and only a few small swimmerets floated on the surface.	Day 0	The compacted scrap block broke in half as it sank, but each half remained intact. Some small pieces of scrap floated.	Day 0	The compacted, alginate-coated scrap block was placed in the tank. It maintained its structural integrity, but appeared to be somewhat buoyant in the currents created by the aeration.
Day 1 - 2	Most of the scrap remained on the bottom of the tank. A few swimmerets were still floating.	Day 1 - 16	Some small pieces had broken away, but most of the scrap remained in two large pieces. No floating matter was noted.	Day 1 - 24	The block remained in one piece.
Day 3 - 16	All scrap had sunk. Nothing floated.				
Day 17	The tank was cleaned and the scrap was examined. Only shell remained.	Day 17	The tank was cleaned and the two halves examined. There was very little meat remaining on the shells.	Day 25 - 32	All visible surfaces of the block were covered with biological growth.
				Day 33	The biological growth had begun to slough off.
				Day 34	The block had split in half. One section had broken up completely, while the other maintained its shape and had begun floating. Gas may have been trapped beneath the alginate coating.
				Day 35	The scrap sunk. The gas had apparently been released from the block. After the tank was cleaned, the scrap was examined and only shell remained.

obtained. Water quality, in the forms of odor, clarity, and color of the water, was more severely impacted in Tank A than in Tank B and more severely in Tank B than in Tank C.

The odor in Tank A was first detected on Day 1, reached its peak on Day 3, and was undetectable after Day 10. In Tank B the odor was first noticed on Day 3, also reached its peak on Day 3, and was gone by Day 10. The peak odor in Tank A was much more offensive than the peak odor in Tank B. Tank C exhibited only a very mild odor from Day 4 to Day 34. This odor was never offensive.

The clarity of the water in Tank A began decreasing immediately after addition of the scrap. This decreased clarity continued until Day 10, when particles in the water column began to agglomerate and settle out. From Day 10 to Day 17, the water appeared to be very clear. On Day 2 and 3, in Tank A, the water around the scrap was an orange-yellow color. In Tank B, the water remained clear after the addition of the scrap. The water clarity began decreasing on Day 1 and continued to decrease until Day 4. On Day 3 and 4, an orange-yellow color was present around the scrap. After Day 9, the water clarity began to improve. At no time was the water clarity as poor in Tank B as it was in Tank A. Water clarity in Tank C began decreasing on Day 1, but was not translucent until Day 4. The water remained translucent until Day 24 and then began to clear.

The water in Tank C was always clearer than the water in Tanks A and B.

Analytical Observations

Analytical changes in the water quality of each tank were monitored daily for the first six days of this study. The parameters analyzed were water temperature, dissolved oxygen, turbidity, BOD₅, TOC, pH, and NH₃. Figures 22, 23, 24, and 25 present NH₃, turbidity, TOC, and BOD₅ data, respectively, for the three tanks. The values for pH, D.O., and temperature remained almost constant in all three tanks over the first six days.

NH₃

The NH₃ concentrations in each of the tanks followed the same general trend; that is, it increased slowly for the first three days, increased rapidly from day three to day five, and then leveled off or decreased slightly on day six. On all days, the NH₃ concentrations found in Tank A were approximately twice those found in Tank B and four times those found in Tank C. The initial NH₃ concentration in the water used in the three tanks was less than 1.0 mg/L. The maximum NH₃ concentrations measured were 33 mg/L for Tank A, 19 mg/L for Tank B, and 6.8 mg/L for Tank C.

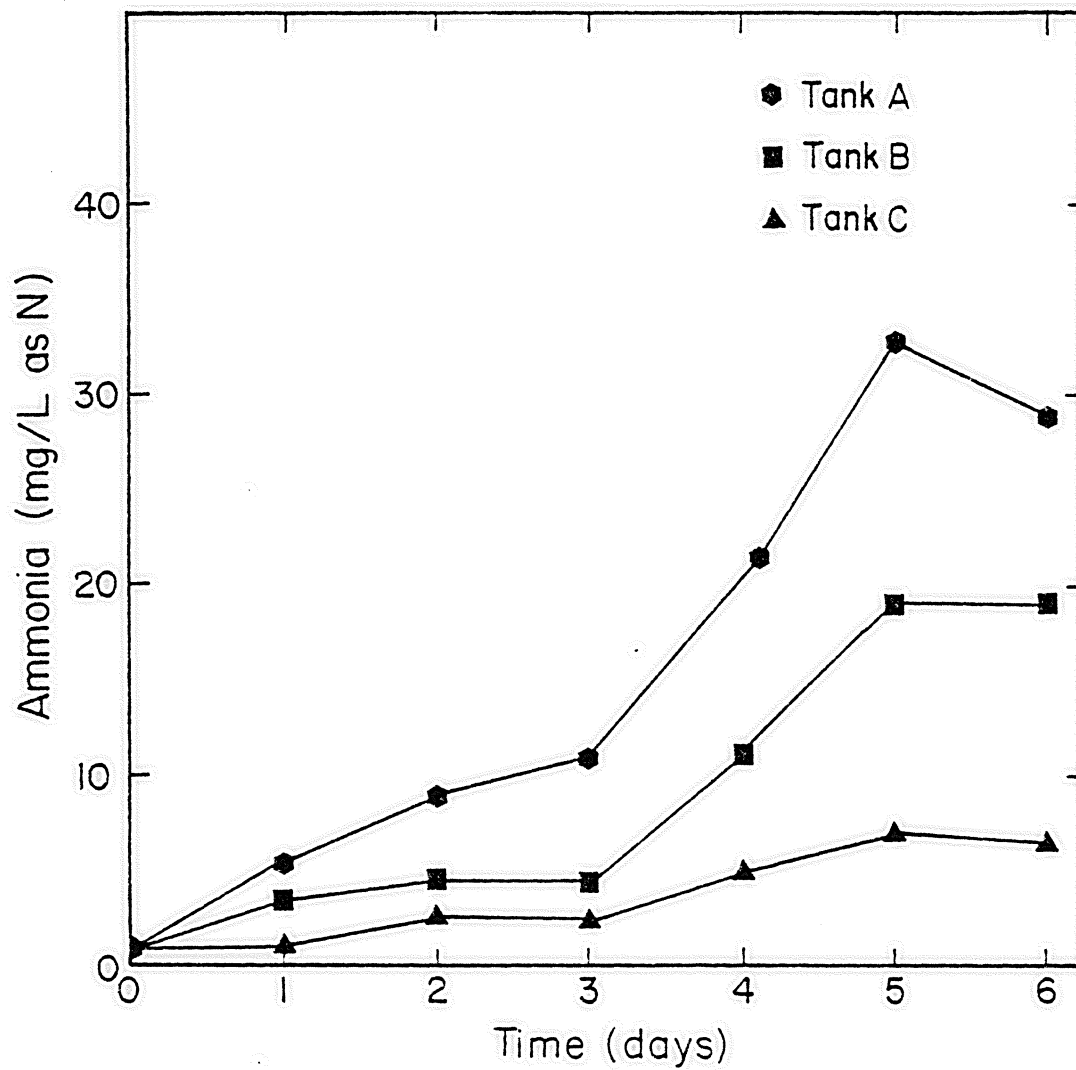


Figure 22. Daily variations in the concentration of NH_3 in the water in Tanks A, B, and C during the first six days of Tank Study I.

Turbidity

The turbidity in each of the tanks was found to follow the same trend through day four. It increased from day zero to day two, decreased from day two to day three, increased again from day three to day four. After day four, the turbidity continued to increase in Tank A and decreased or leveled off in Tanks B and C. The turbidity in Tank A was almost twice that of Tank B and four times that of Tank C, as was similarly noted for the NH_3 concentrations. The initial turbidity in the water used in the three tanks was less than 1.0 NTU. The maximum turbidities measured were 33 NTU for Tank A, 14.5 NTU for Tank B, and 6.6 NTU for Tank C.

TOC

The TOC concentrations in all three tanks followed similar trends. TOC levels sharply increased on day one, sharply decreased on days two and three, and then changed relatively little after day three. The only deviation from this trend occurred in Tank B on day five and was so drastic that it may have been due to an erroneous reading. The initial concentration of TOC in the water used in the three tanks was less than 1.0 mg/L. The maximum TOC concentrations measured were 41.5 mg/L for Tank A, 19.4 mg/L for Tank B, and 8.8 mg/L for Tank C.

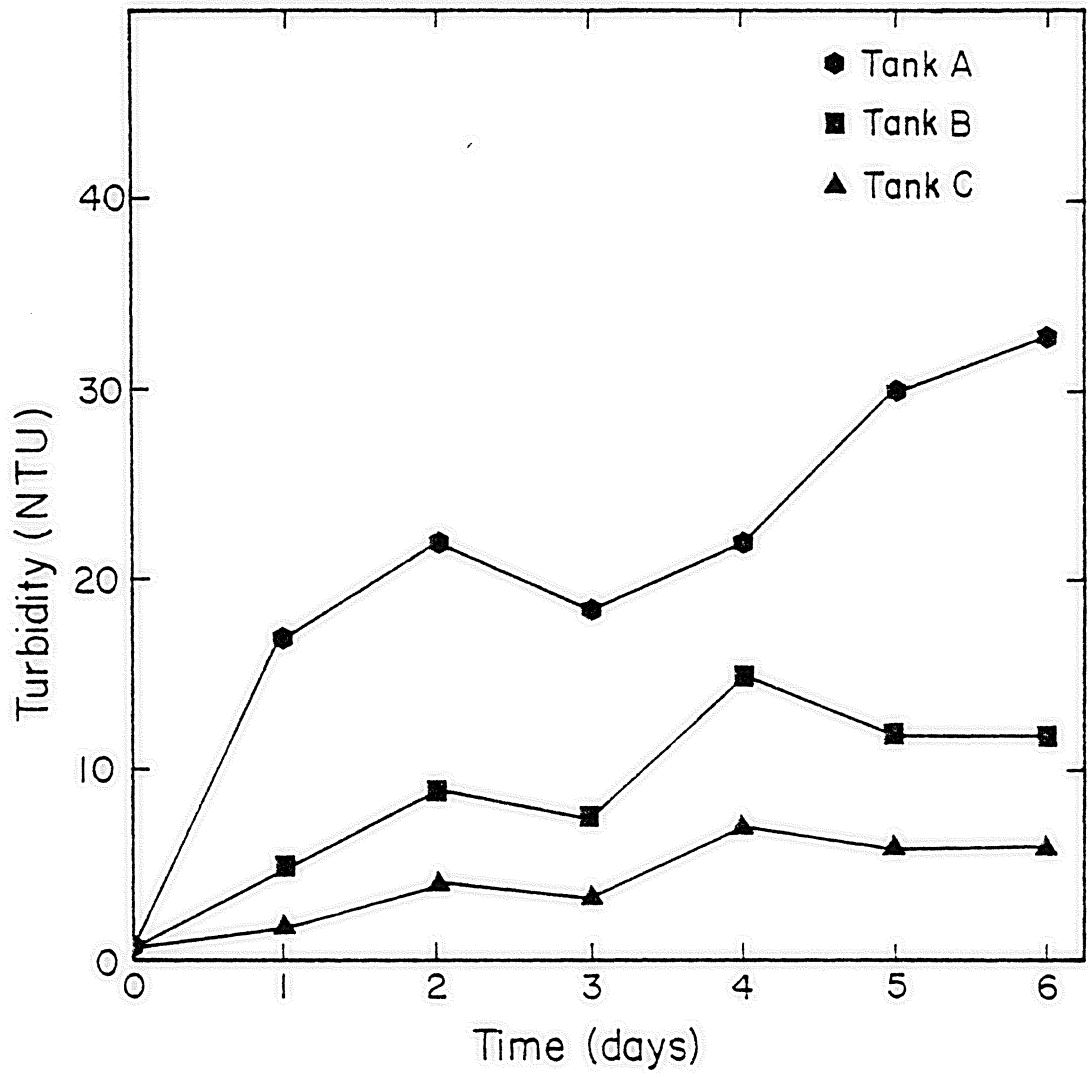


Figure 23. Daily variations in the turbidity of the water in Tanks A, B, and C during the first six days of Tank Study I.

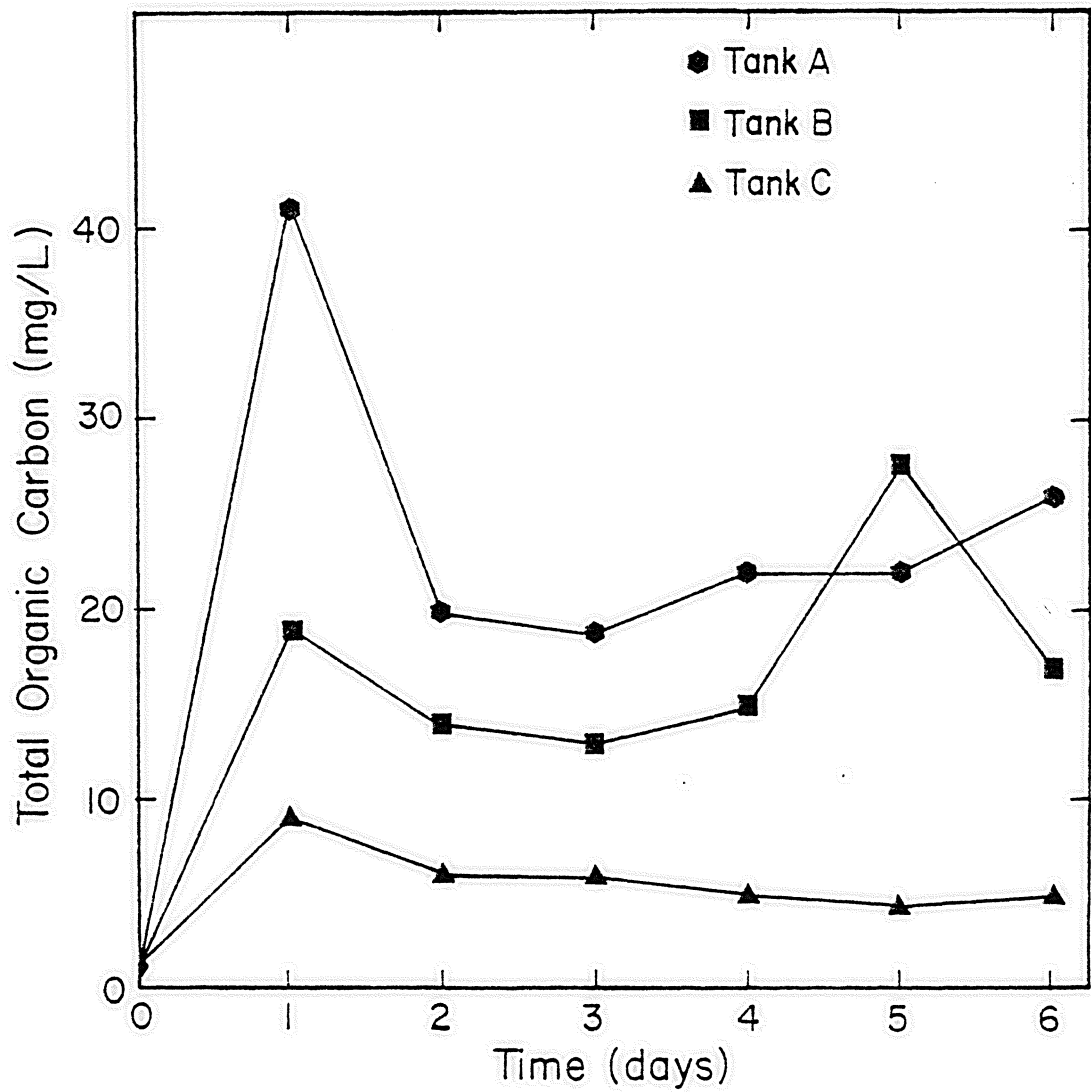


Figure 24. Daily variations in the concentration of TOC in the water in Tanks A, B, and C during the first six days of Tank Study I.

BOD₅

Tank A and Tank B each exhibited the same trend in BOD₅ changes with the values for Tank A being much greater than those for Tank B. The BOD₅ level of Tank C did not change. It remained less than 12 mg/L. The initial concentration of BOD₅ in the water used in the three tanks was less than 12 mg/L. The maximum BOD₅ values were 130 mg/L for Tank A and 36 mg/L for Tank B.

Tank Study II

In this study, coated scrap balls were immersed in tanks simulating four different environments. These environments were aerated saline water with no sediment in Tank D, aerated saline water with sediment in Tank E, nonaerated saline water with sediment in Tank F, and nonaerated saline water with no sediment in Tank G. Both sensory and analytical observations of change with time were made.

Sensory Observations

The appearance of the scrap, the odor of the water, the amount and type of floating matter present, the presence of biological growth, and the color and visual appearance of the water were the sensory observations made. These observations were made on days 0, 1, 2, 3, 5, 7, 9, 11, 13,

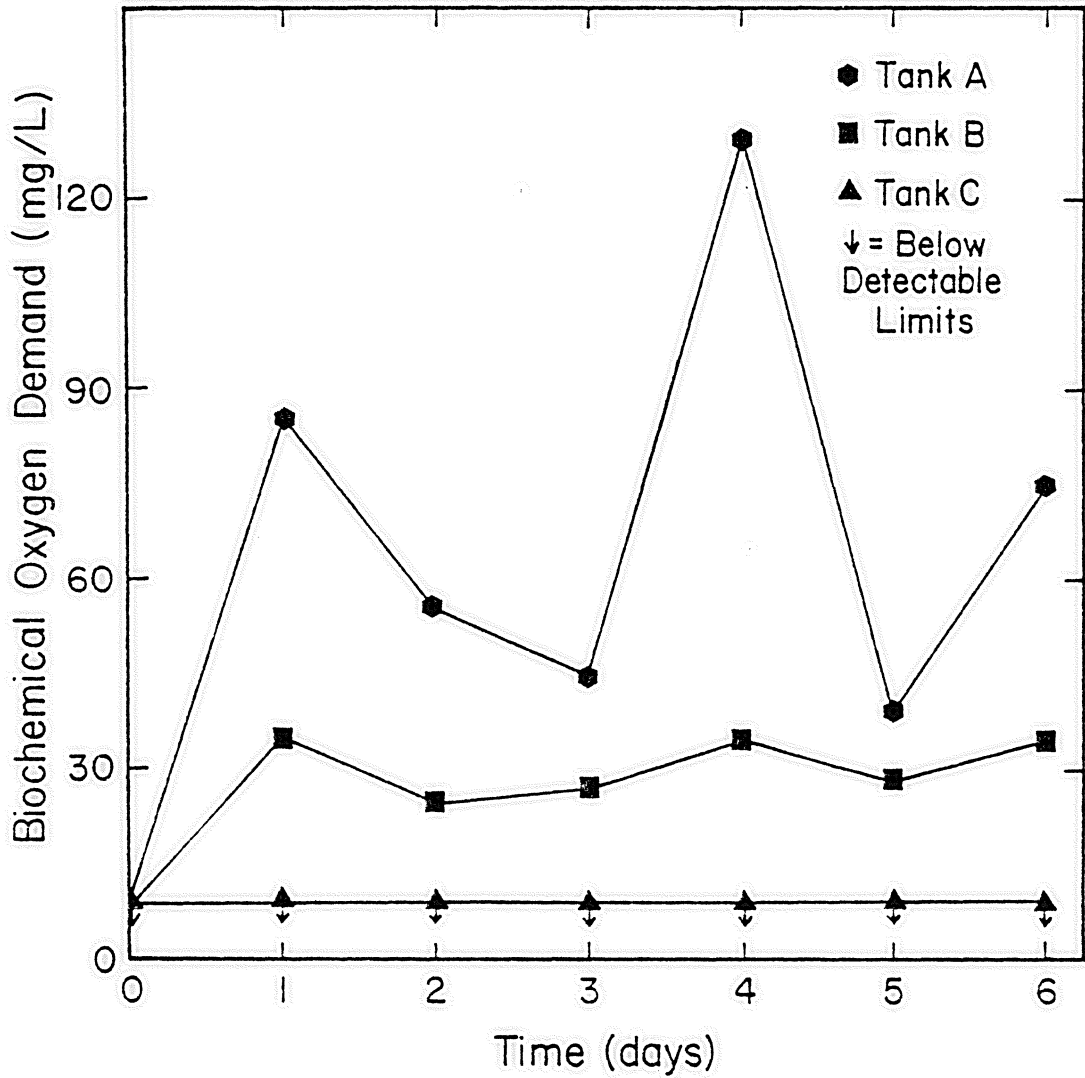


Figure 25. Daily variations in the concentration of BOD₅ in the water in Tanks A, B, and C during the first six days of Tank Study I.

16, 19, 21, 29, and 36. Table VI provides a detailed listing of these sensory observations.

In comparing the four different marine environments, it was observed that the two aerated environments were impacted similarly by the addition of crab scrap. The two nonaerated environments were impacted in very different ways.

Appearance of Scrap

The alginate coatings had sloughed off the scrap in each of the four tanks by Hour 4. By Day 1, all the scrap had disassociated, but it was remaining in a distinct mound in each tank. This distinct mound of scrap remained in Tanks D and E for the duration of the experiment. The only changes being a reduction in size with time and the formation of a mat of biological material over the mound. The mounds in Tanks F and G both began producing gas which carried scrap to the water's surface and caused it to float and then later, to sink. This movement of scrap through the water column caused the scrap to be dispersed throughout the tanks. In Tank F, all the scrap had fallen out of the water column by Day 11 and no floating scrap was seen from Day 11 to Day 36. Scrap continued to float in Tank G up through Day 36.

TABLE VI. SENSORY OBSERVATIONS MADE DURING TANK STUDY II.

COLOR AND APPEARANCE OF THE WATER			
TANK D	TANK E	TANK F	TANK G
Day 1 The water was a murky yellow-green and was no longer transparent. A foam had begun to form on the water's surface.	Day 1 The water was murky and yellow-green and the scrap was not visible.	Day 1 The water was turbid but still transparent	Day 1 & 2 The water had stratified. The upper water was clear while the lower 10 cm of water were very turbid.
Day 2 The scrap was visible and the foam had decreased.	Day 2 Foam had begun appearing on the water's surface. The water had cleared slightly.	Day 2 The surface water was still transparent, but a water layer 4 cm in depth over the sediment had turned very black.	
Day 3 The water cleared considerably. The scrap was visible. Small amounts of foam were noted.	Day 3 Foam had filled the entire area above the water approximately 10 cm, and had seeped out of the tank. Turbidity was decreasing.	Day 3 The black zone increased to a depth of 5 cm.	Day 3 Dark water was noticed around the edges of the scrap heap.
Day 5, 7 & 9 The turbidity was decreasing. No foam was present.	Day 5 Foam was escaping from the tank.	Day 5 Black zone was 8 cm deep	Day 5 & 7 The bottom 10 cm of water were turbid and black. The supernatant water was clear.
	Day 7 The foam had decreased markedly.	Day 7 The turbidity had increased.	
	Day 9 Water clarity was increasing. The foam had decreased further.	Day 9 The color stratification had begun to disperse.	Day 9 The water had begun to destratify.
Day 11 The tank was again transparent. Foam was not present	Day 11, 13, & 16 The foam was completely gone and the water was clearing.	Day 11 Water color stratification was not detectable.	Day 11 The water was very turbid. No turbidity stratification was noted.
Day 13 & 16 The clarity of the water was improving.		Day 13, 16, & 19 The turbidity was steadily increasing.	Day 13, 16, 19, 22, & 29 The turbidity was increasing slightly.
Day 19, 22, 29 & 36 Water was completely clear.	Day 19 The water was completely clear.		
	Day 22, 29 & 36 The water remained clear.	Day 22 The water had turned reddish-brown.	
		Day 29 & 36 The water was turbid but clearing. It was reddish-brown.	Day 36 The turbidity appeared to have decreased.

TABLE VI. CONTINUED.

TANK D		TANK E		SCRAP APPEARANCE		TANK F		TANK G	
Hour 4	The alginate coating had sloughed off.	Hour 4	The alginate coating had sloughed off.	Hour 4	The alginate coating had sloughed off.	Hour 4	The alginate coating had sloughed off.	Hour 4	The coating had sloughed off.
Day 1	The scrap was not visible.	Day 1	The scrap was not visible.	Day 1	The scrap had totally disassociated, but remained in one mound. Gas was occasionally released from the scrap to the surface.	Day 1	The scrap was in a mound where the scrap ball had been and small sections of the coating were present.		
Day 2	The scrap completely disassociated.	Day 2	The scrap was totally disassociated but the majority of scrap remained in one mound. A few particles were suspended in the water column.	Day 3	The scrap mound and the sediment both released large bubbles of gas. Some scrap and gas were trapped by a scum which had formed at the water's surface.	Day 2	Small pieces of floating scrap were noticed.		
Day 3, 5, 7 & 9	The scrap remained in a mound, but the size of the mound was slowly decreasing. Only shell and biological mat remained.	Day 3, 5, 7 & 9	The scrap remained in a mound but the size of the mound was slowly decreasing.	Day 5	When the scrap reached the water's surface, the gas escaped and the scrap began to fall, but it did not return to the sediment. A band of suspended scrap formed in the water between the turbid and clear layers of water.	Day 3	Black color appeared in the water around the scrap mound.		
		Day 11	All tissue appeared to be gone. Only shell and a biological mat remained.			Day 5 & 7	The scrap was moving vertically through the water column.		
Day 13, 16, 19, 22, 29, & 36	The shell remained in a mound covered by a mat of biological material.	Day 13, 16, 22, 29 & 36	The shell remained in a mound covered by a mat of new biological material.	Day 7	The scrap was moving vertically through the water column.				
				Day 9	Most of the scrap remained suspended somewhere in the water column.	Day 9	Large amounts of floating scrap were present, with strands of scrap which hung from the water's surface.		
				Day 11, 13, 16, 19, 22, 29 & 36	No scrap was floating or suspended in the water column.	Day 11, 13, 19, 22, 29, & 36	White biological mats were floating on the water's surface. Floating scrap was present.		

TABLE VI. CONTINUED.

FLOATING MATTER			
TANK D	TANK E	TANK F	TANK G
Day 0 1, 2, 3, 5, 7 & 9	No floating scrap detected.	Day 0 1, 2, 3, 5, & 7	No floating scrap was observed.
		Day 1 & 2	Small particles of scrap were floating on the surface.
		Day 3	Scum formed on the surface and contained trapped gases and scrap.
		Day 5 & 7	Scum and scrap were floating on the water's surface.
	Day 9	Day 9	Large amounts of scrap were floating on the surface.
	Small bits of floating scrap were detected.	Day 11	White biological mats were found on the water's surface. No scrap was floating.
Day 11	Day 11		Day 11
The mat of new biological material which had formed over the scrap mound began floating when a gas bubble became trapped beneath it.	No floating scraps were detected.		Scum and scrap were present on the water's surface. White biological material had formed on the water's surface.
Day 13 & 16	Day 13 & 16	Day 13 16, 19 22, 29 & 36	Day 13 & 36
The biological mat was floating.	A floating mat of shell and biological matter was observed.	No floating scrap. The area of the scum layer decreased. White biological mats floated on the water's surface.	Floating mats of mixed scrap and biological material had begun to sink.
Day 19	Day 19		
The biological mat sunk.	The floating mat had sunk.		
Day 22 29 & 36	Day 22 29 & 36		
No floating material detected.	No floating matter detected.		

TABLE VI. CONTINUED.

BIOLOGICAL GROWTH							
TANK D		TANK E		TANK F		TANK G	
Day 0	No attached biological growth detected.	Day 0, 1 & 2	No attached biological growth was detected.	Day 0 1,2,3 5,7&9	No attached biological growth detectable.	Day 0 2, 3, 5, 7 & 9	No biological growth was detected.
Day 2	Biological growth was noted on tank walls.						
Day 3	White biological growth was noted around the edges of the scrap.	Day 3	A small amount of biological growth was noted on the walls of the tank.				
Day 5	A mat of biological growth had formed over the scrap and tank bottom.	Day 5	Biological growth on the tank walls had increased slightly.				
Day 7 & 9	The mat continued to increase in size.	Day 7	A biological mat had formed over the sediment and scrap.				
Day 11	The mat began floating	Day 11 & 13	The biological growth on the tank walls was increasing.	Day 11	The first biological growth was detected. White biological mats appeared on water's surface.	Day 11	White mats of biological material had formed on the water's surface.
Day 13	Biological growth had reestablished on the shell.			Day 13	The area of the white biological mats increased.	Day 13 16, 19 22 & 29	White mats of biological material were present at the water's surface.
Day 16 & 19 & 22	Biological growth on shell continued to increase.	Day 16	The biological growth on the walls of the tank had increased significantly.	Day 16	Green biological material was detected on the tank walls.		
Day 29	The density of the biological material on the walls of the tank had begun decreasing.	Day 19 22, 29 & 36	The biological growth on the tank walls was decreasing.	Day 19	Green biological material had formed long streaks on the walls of the tank. Brown streaks had also formed and the white mats were still on the water's surface.		
Day 36	Very little biological material on the walls of the tank. Bottom mat of biological material had also decreased.			Day 22 29 & 36	The walls were completely covered with red, green, and brown biological material.	Day 36	A few green and brown streaks had formed on the tank walls. White biological material was present at the water's surface.

TABLE VI. CONTINUED.

ODOR OF THE WATER			
TANK D	TANK E	TANK F	TANK G
Day 1 A fishy odor was detected.	Day 1 A fishy odor was detected.	Day 1 A fishy odor was detected	Day 1 & 2 A fishy odor was detectable.
Day 2 The fishy odor had decreased.	Day 2 The odor increased.	Day 2 A slight sulfur odor was detected.	
Day 3 The odor had increased but resembled that of ammonia.	Day 3 A strong ammonia odor was detected. The fishy odor was gone.	Day 3 The sulfur odor had increased.	Day 3 The fishy odor had disappeared and a sulfur odor began to develop.
Day 5 The ammonia odor increased.	Day 5 The ammonia odor increased.	Day 5 A strong sulfur odor was detectable.	Day 5 A strong sulfur odor was detectable.
Day 7 The ammonia odor was very strong.	Day 7 The ammonia odor was very strong.	Day 7 The sulfur odor had become stronger.	7, 9, 11, 13, 16, 19 & 22
Day 9 The ammonia odor was decreasing markedly.	Day 9 The ammonia odor had decreased.	Day 13 The sulfur odor was being replaced by another equally strong odor.	
	Day 11 The ammonia odor was decreasing.		
Day 16 The odor was completely gone.	Day 16 The ammonia odor was completely gone.	Day 22 The odor was still strong but no longer sulfur-like.	
Day 19 No odor detected.	Day 19 No odor was detected.	Day 29 The intensity of the odor increased.	Day 29 The odor had changed from sulfur to an odor similar to that of sewage.
22, 29 & 36	22, 29 & 36	Day 36 The odor had decreased, but was still offensive.	Day 36 A strong sulfur odor was again detectable.

Odor of the Water

In Tanks D and E, a fishy odor was first detected which later developed into an ammonia odor. This odor peaked by Day 7 and then decreased until there was no detectable odor after Day 16. In Tanks F and G, the initial odor was also a fishy odor, but by Day 3, the odor had changed to a distinct sulfur odor. In Tank F, the sulfur odor persisted until Day 13 when another equally strong odor replaced it. This odor remained until Day 36. In Tank G, the sulfur odor remained until Day 29 when it was replaced by another strong odor. The sulfur odor returned by Day 36.

Floating Matter

The only floating matter observed in Tank D was the biological mat which had covered the scrap mound. On Day 11, a gas bubble became trapped beneath it and caused it to float until Day 19. In Tank E, small bits of floating scrap were seen on Day 9 and on Days 13 and 16, a floating mat of shell and biological matter was observed.

In Tank F, small particles of floating scrap were observed on Days 1 and 2. By Day 3, a scum had formed over the water's surface which contained trapped gases and scrap. The scum persisted and by Day 11 it contained white biological mats but no scrap. The scum and biological mats re-

mained through Day 36.

In Tank G, small particles of floating scrap were observed on Days 2, 3, and 5. By Day 7, large amounts of scrap were floating and on Day 9, strands of scrap hanging down from the water's surface had formed. A scum layer and mat of white biological matter had formed on the water's surface by Day 11 and these layers persisted through Day 36.

Biological Growth

The first biological growth to appear in Tanks D and E, on Day 2 and 3, respectively, was on the walls of the tanks. This was followed by the formation of biological mats over the scrap mounds. White biological growth was seen in both tanks.

In Tanks F and G, no biological growth was visible until Day 11, when white biological mats began to form on the water's surface in both tanks. Green, brown, and red streaks of biological growth began to form on the walls of Tank F on Day 16 and by Day 22, the tank walls were completely covered with biological material. These streaks were first seen in Tank G on Day 36.

Color and Appearance of the Water

The water in Tanks D and E turned a murky yellow-green by Day 1. A foam appeared on the water's surface in Tank D

on Day 1 and traces of the foam remained until Day 5. In Tank E, the foam first appeared on Day 2 and by Day 3, a 6 cm layer had formed above the water's surface. By Day 11, the foam had disappeared. The water clarity in both tanks had begun improving by Day 3 and by Day 19, the water was as clear as before the scrap was added.

In Tanks F and G, the water remained clear near the surface, but became black and turbid around the scrap. The water in both tanks remained stratified with respect to turbidity until Day 9. After destratification was complete, on Day 11, the water in both tanks became more turbid, with the water in Tank F becoming reddish-brown by Day 22.

Analytical Observations

Analytical changes in the water quality of each tank were noted on day 0, 1, 2, 3, 5, 7, 9, 11, 13, 16, 19, 22, 29, and 36. The parameters analyzed were pH, dissolved oxygen, temperature, turbidity, NH_3 , $\text{NO}_2^- + \text{NO}_3^-$, organic nitrogen, and TOC. These data, with the exception of temperature, are presented graphically in Figures 25 through 39.

Nitrogen Containing Compounds

Changes in the concentrations of the three different nitrogen forms in Tanks D, E, F, and G can be noted from Figures 26, 27, 28 and 29, respectively. These data are summarized in Figure 30,

In Tank D, the NH_3 concentration increased from less than 1 mg/L to a maximum of 62 mg/L by Day 7. It then decreased in an almost linear fashion to below the detectable concentration of 1 mg/L by Day 16. No NH_3 was detected after Day 16. Organic nitrogen was detected on only four of the sampling days: Days 2, 3, 11, and 13. It was never detected above 5 mg/L in Tank D. The $\text{NO}_2^- + \text{NO}_3^-$ concentration varied somewhat erratically. A concentration of 2 mg/L was found on Day 2, then the concentration decreased to less than 1 mg/L and remained there until Day 9. From Day 9 to Day 36, the concentration of $\text{NO}_2^- + \text{NO}_3^-$ alternately increased and decreased.

The nitrogen containing compounds in Tank E followed the same trends as did the nitrogen containing compounds in Tank D. Only minor differences were noticed.

In Tank F, the NH_3 concentration increased to 25 mg/L on Day 3 and then decreased to 5 mg/L by Day 5. After Day 5, the NH_3 concentration began increasing and continued to increase throughout the study, reaching a high value of

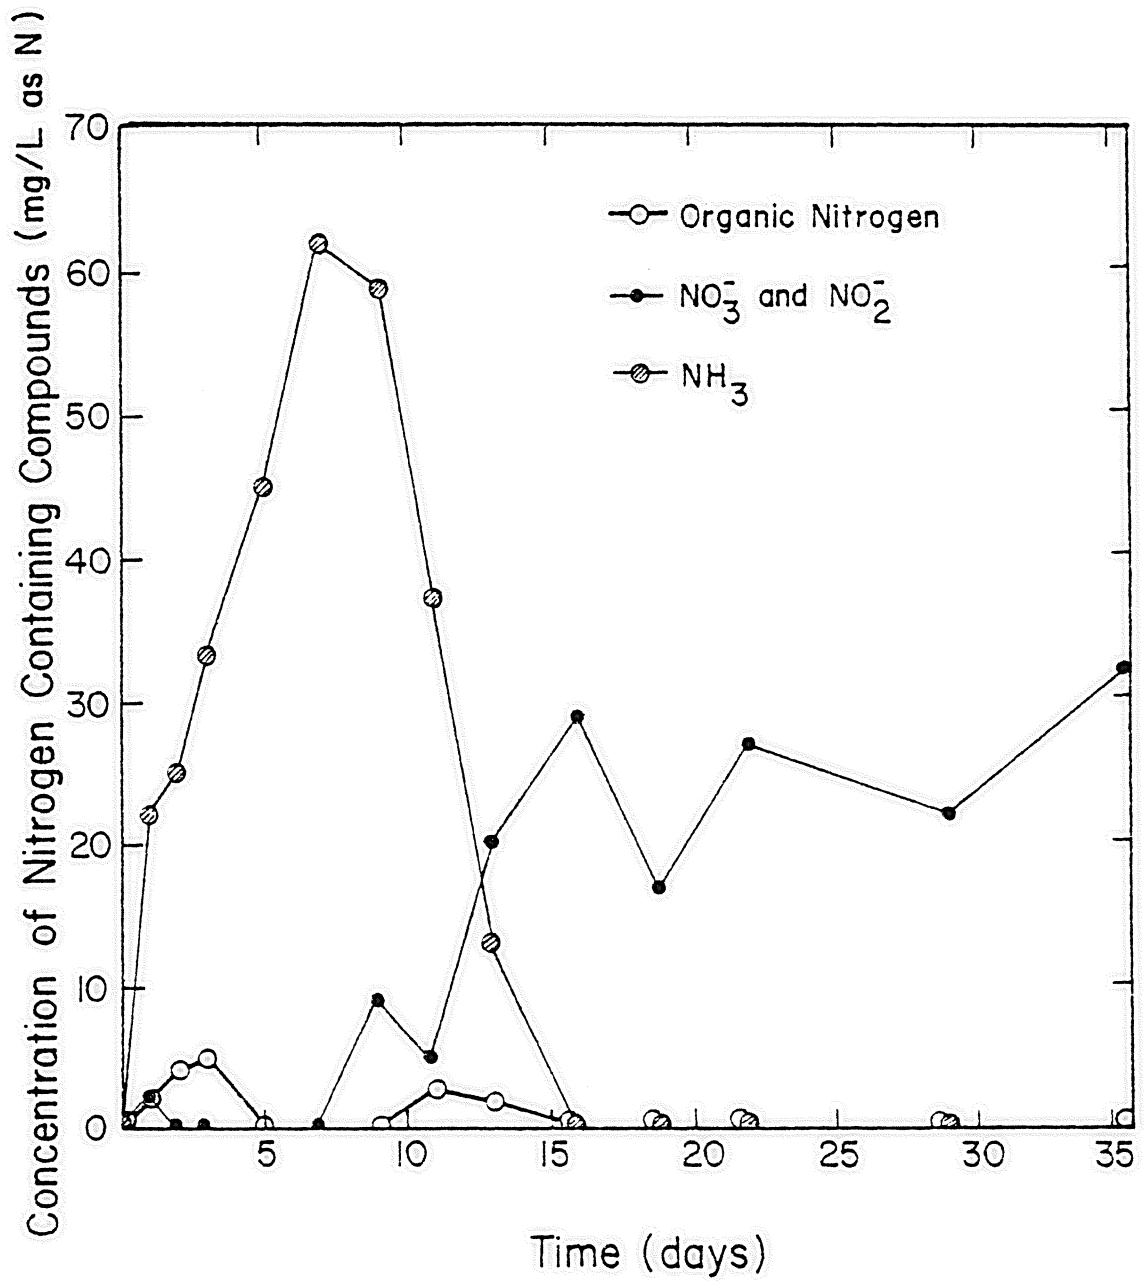


Figure 26. The variations in the concentrations of nitrogen containing compounds in the water in Tank D on the sampling days of Tank Study II.

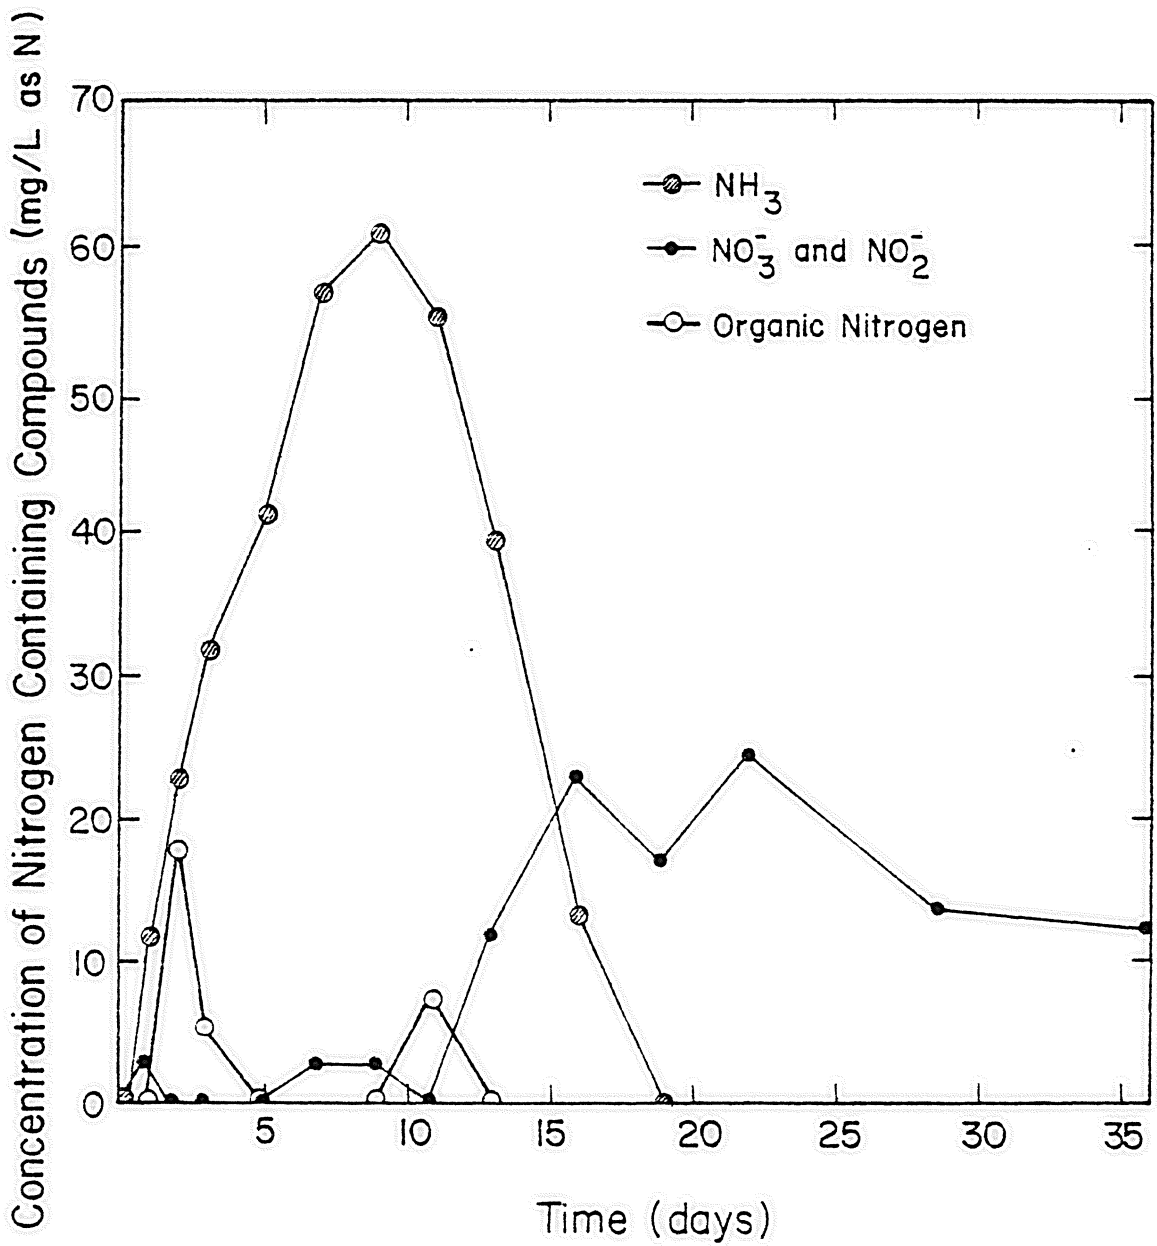


Figure 27. The variations in the concentrations of nitrogen containing compounds in the water in Tank E on the sampling days of Tank Study II.

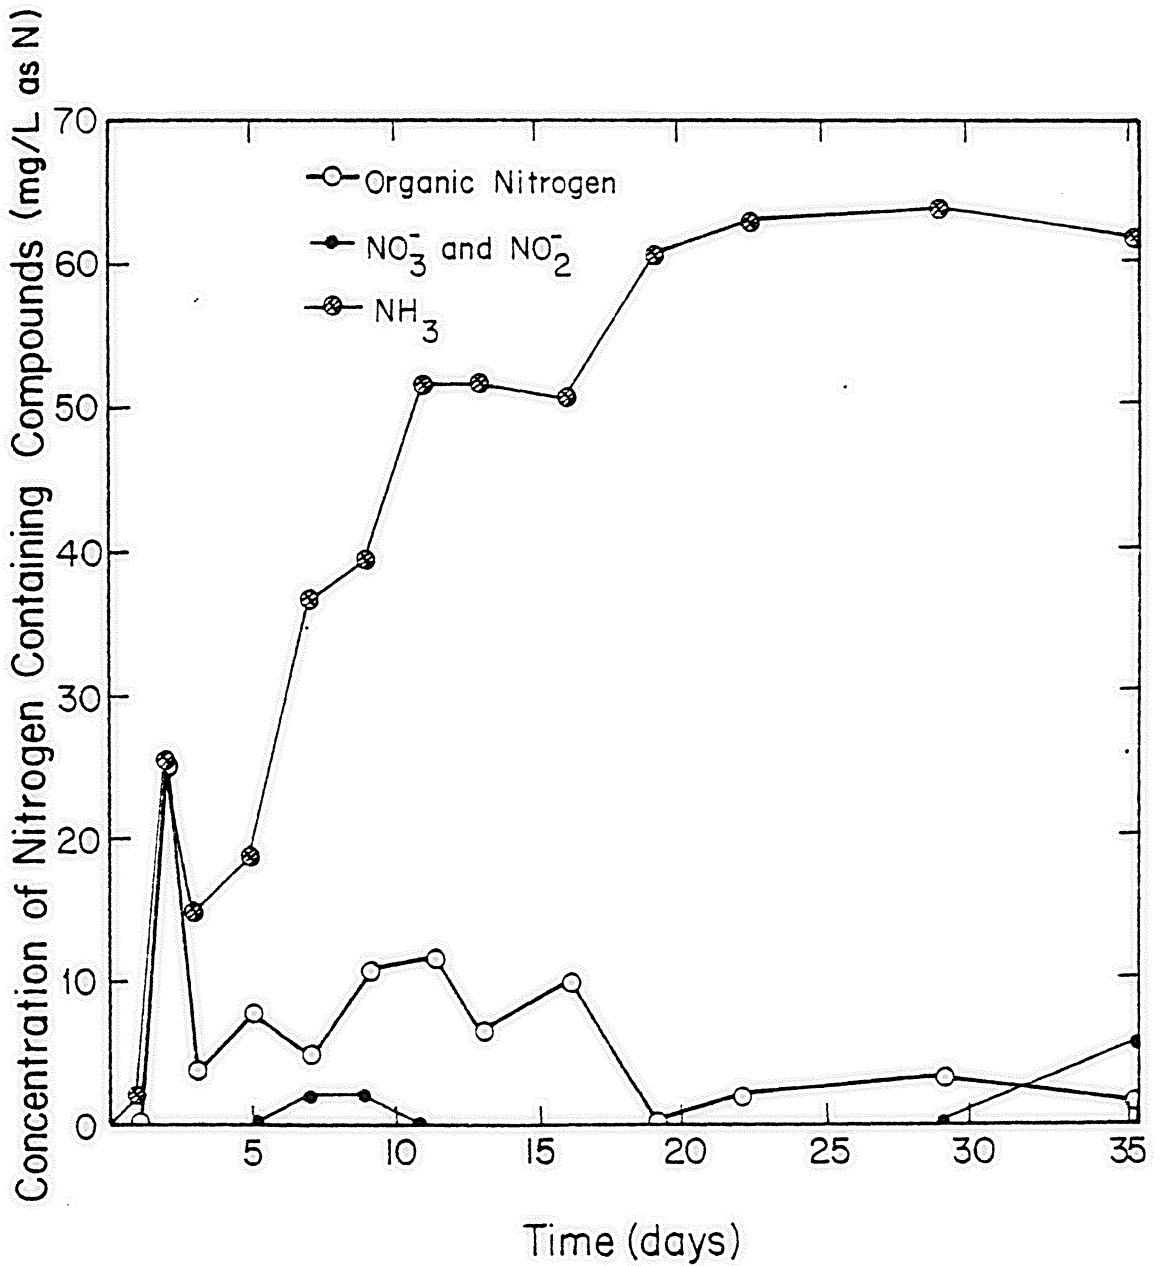


Figure 28. The variations in the concentrations of nitrogen containing compounds in the water in Tank F on the sampling days of Tank Study II.

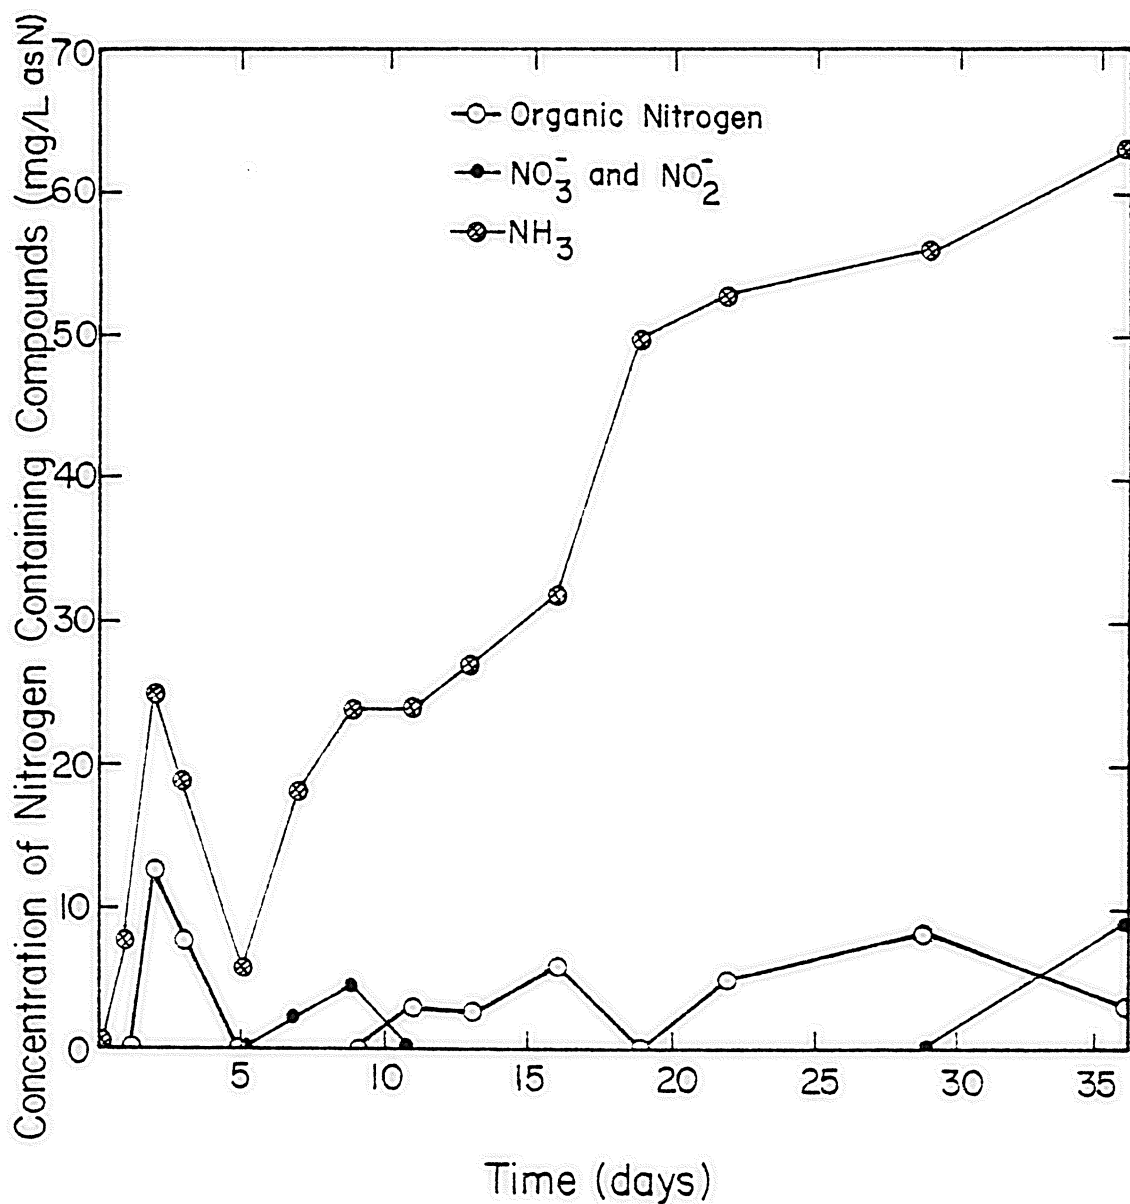


Figure 29. The variations in the concentrations of nitrogen containing compounds in the water in Tank G on the sampling days of Tank Study II.

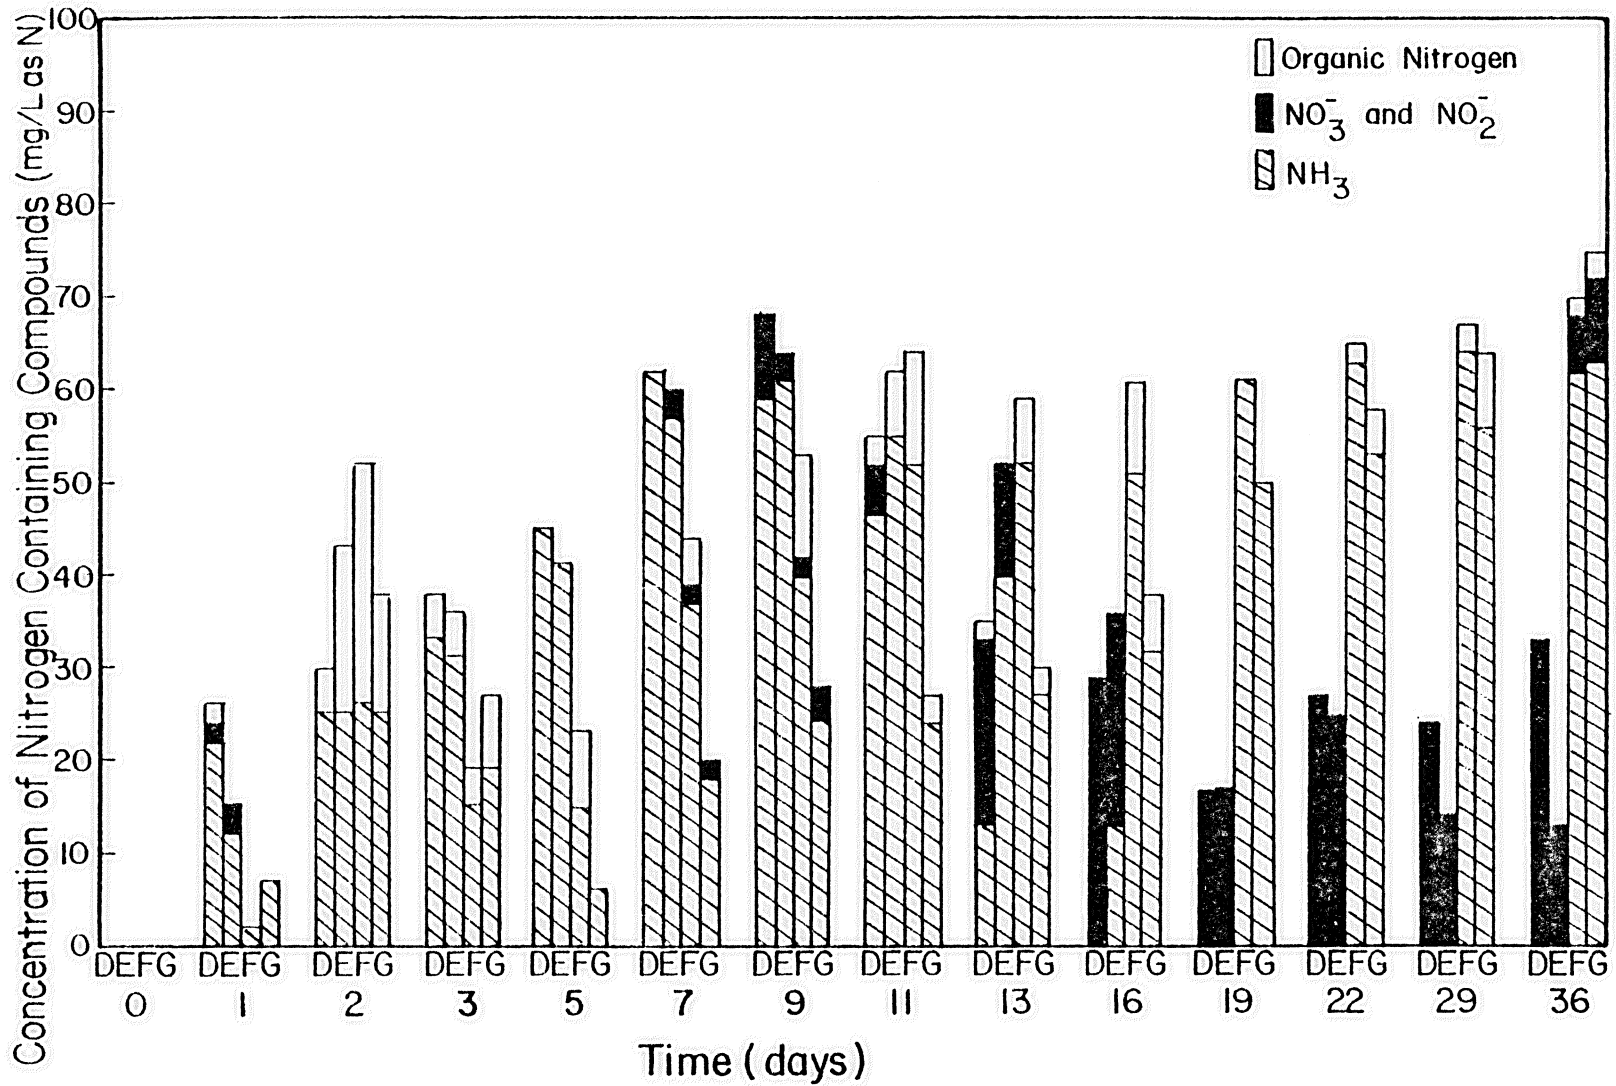


Figure 30. The variations in the concentrations of nitrogen containing compounds in the water in Tanks D, E, F, and G on the sampling days of Tank Study II.

62 mg/L on Day 36, the last sampling date. Organic nitrogen was not detected until Day 2, when a concentration of 13 mg/L was found. The concentration then decreased in a linear manner, until it was again below the detectable level of 1 mg/L on Day 5. Organic nitrogen was not detected again until Day 11. After Day 11, the concentration remained between 1 and 10 mg/L on all sampling dates except Day 19, when it fell below 1 mg/L. The $\text{NO}_2^- + \text{NO}_3^-$ concentration remained below the detectable level of 1 mg/L on all but three sampling dates, Days 7, 9, and 36. On these days, it remained below 10 mg/L.

The nitrogen containing compounds in Tank G followed the same trends as discussed above for Tank F.

TOC

The TOC concentrations for each tank can be found in Figures 31, 32, 33, and 34. In Tanks D and E, the TOC concentration increased to approximately 30 mg/L on Day 1, then decreased to approximately 25 mg/L on Day 2, and then increased slightly on Day 3. From Day 3 to Day 7, the TOC concentration remained constant and after Day 7, it began to steadily decrease. In Tanks F and G, the concentration of TOC increased sharply on Days 2 and 3, respectively. Following this sharp increase was a sharp decrease. After Day 7 the concentration of TOC varied erradically, increas-

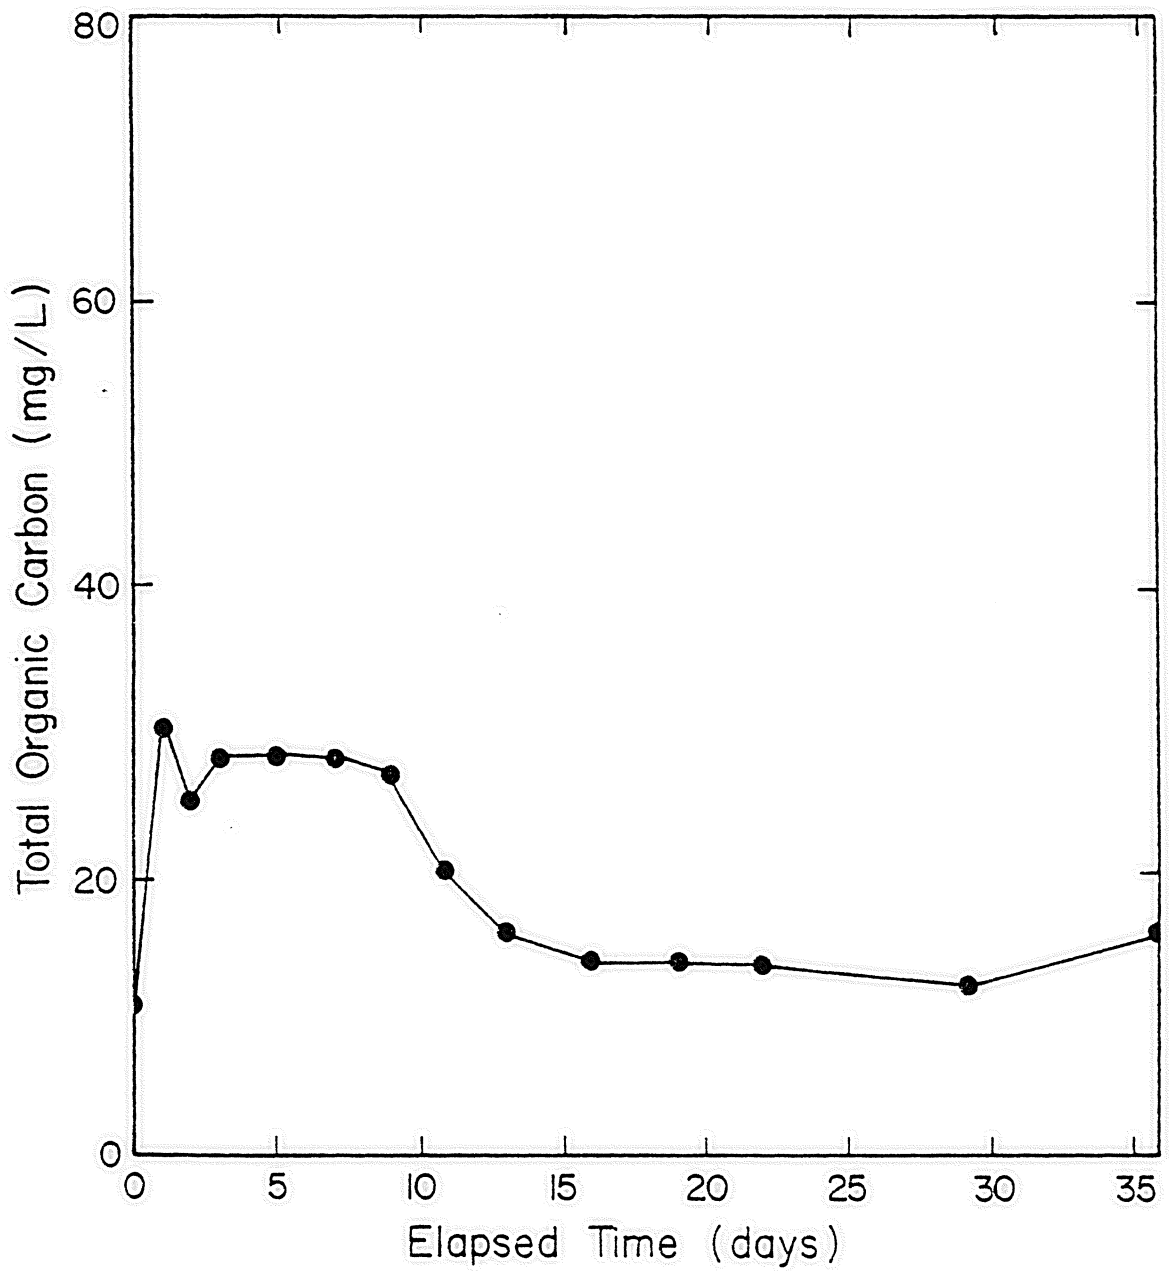


Figure 31. The variations in the concentrations of TOC in the water in Tank D on the sampling days of Tank Study II.

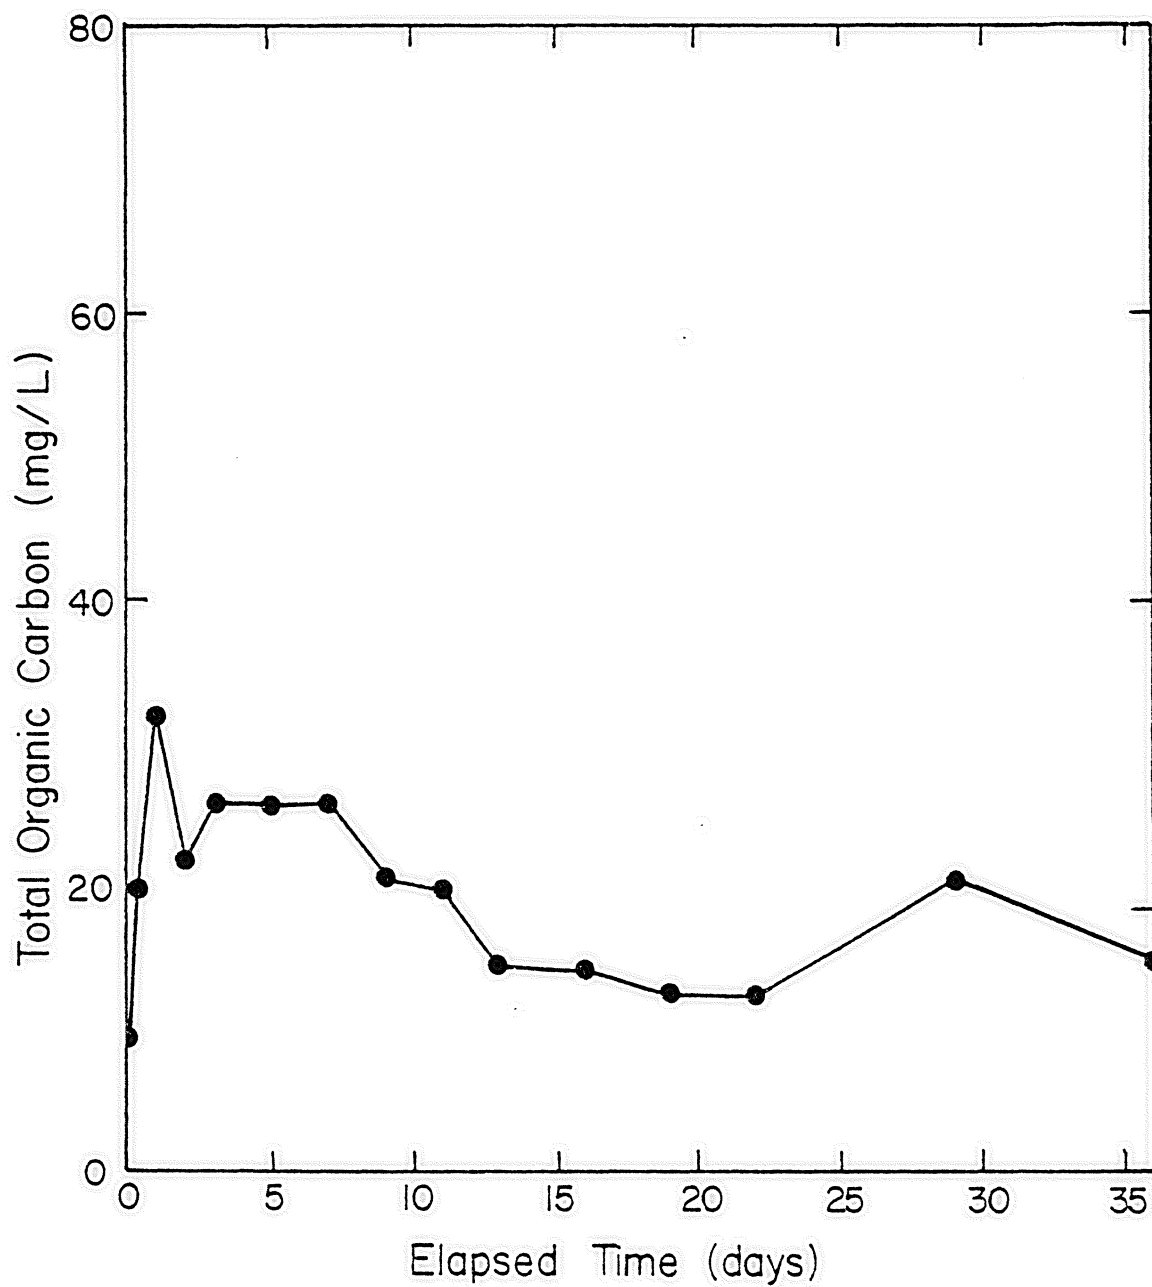


Figure 32. The variations in the concentrations of TOC in the water in Tank E on the sampling days of Tank Study II.

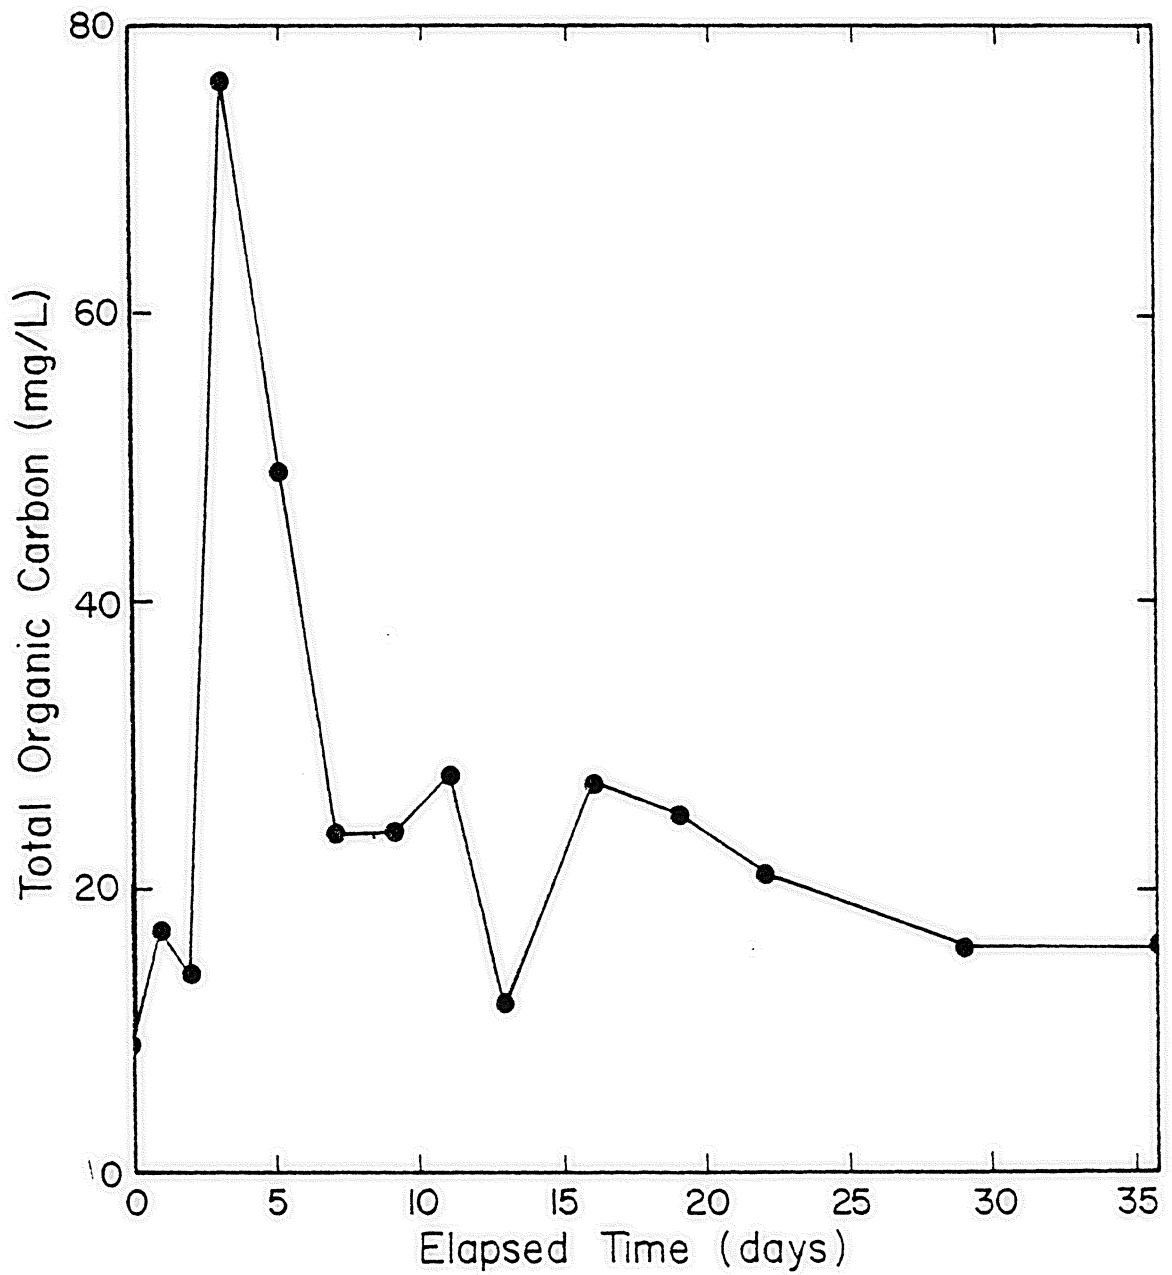


Figure 33. The variations in the concentration of TOC in the water in Tank F on the sampling days of Tank Study II.

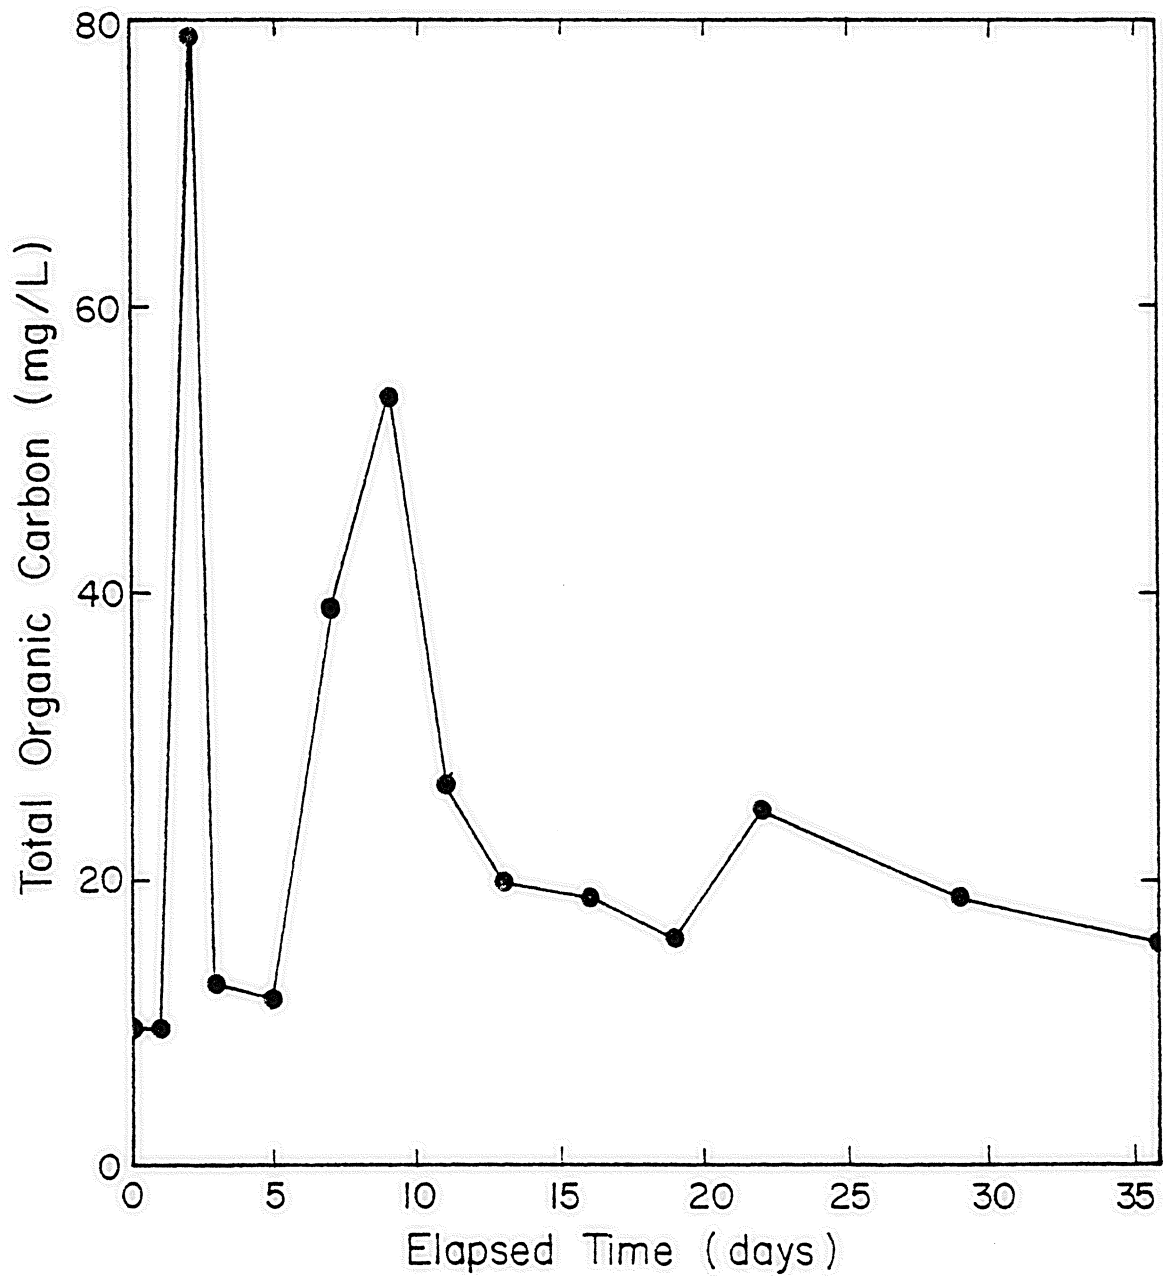


Figure 34. The variations in the concentrations of TOC in the water in Tank G on the sampling days of Tank Study II.

ing and decreasing twice before reaching a level nearly equal to the initial TOC concentration.

pH

The pH data for Tanks D and E is presented in Figures 35 and 36, respectively. As noted from these figures, the pH data for these tanks are almost identical. They show a slight decrease from 7.9 to 7.4 on Day 1, followed by an increase to 8.2 by Day 5 and a leveling off.

The pH data for Tanks F and G can be found in Figures 36 and 37, respectively. The pH data for these tanks was almost identical also. These pH values decrease from 7.8 and 7.5, respectively, to values of 6.7 and 6.9 by Day 5. A very slow increasing trend was exhibited until Day 29, when the pH of the water in each tank dropped to almost 6.0. A return to pH values of approximately 7.0 was observed by Day 36.

The pH values in the aerated tanks ranged from 7.5 to 8.2, while the pH values in the nonaerated tanks ranged from 6.7 to 7.8.

Dissolved Oxygen

Figures 35 and 36 also provide the D.O. data for Tanks D and E, respectively. The D.O. concentration in each tank decreased from an initial value of 5.9 mg/L to a low of 4.5

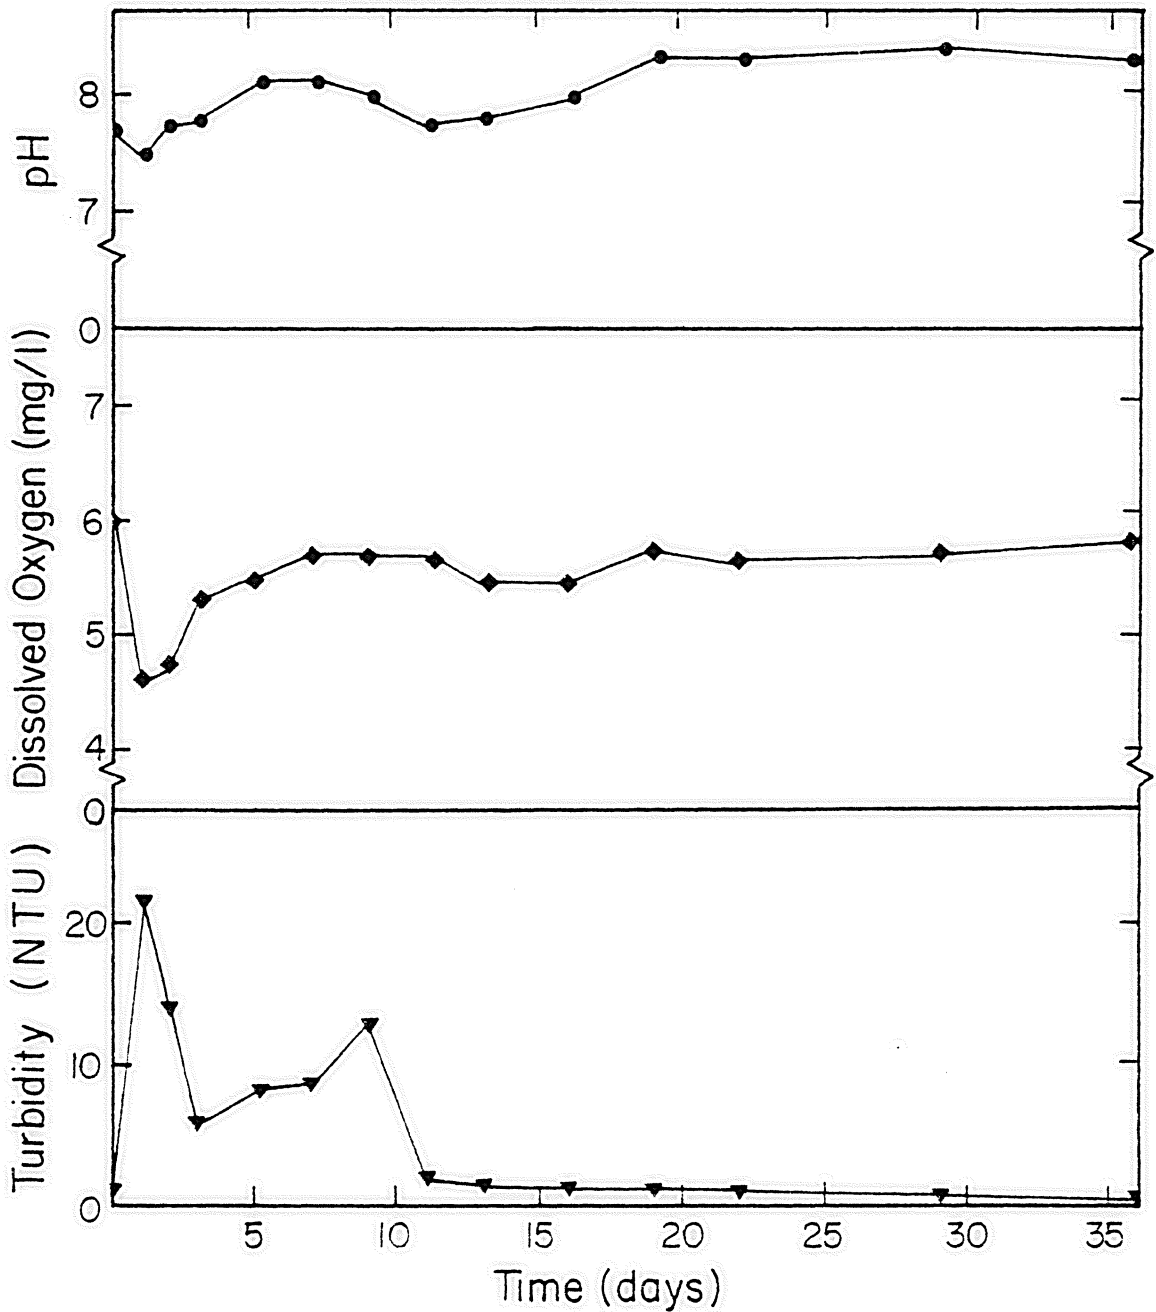


Figure 35. The variations in the turbidity, pH, and the dissolved oxygen concentrations in the water in Tank D on the sampling days of Tank Study II.

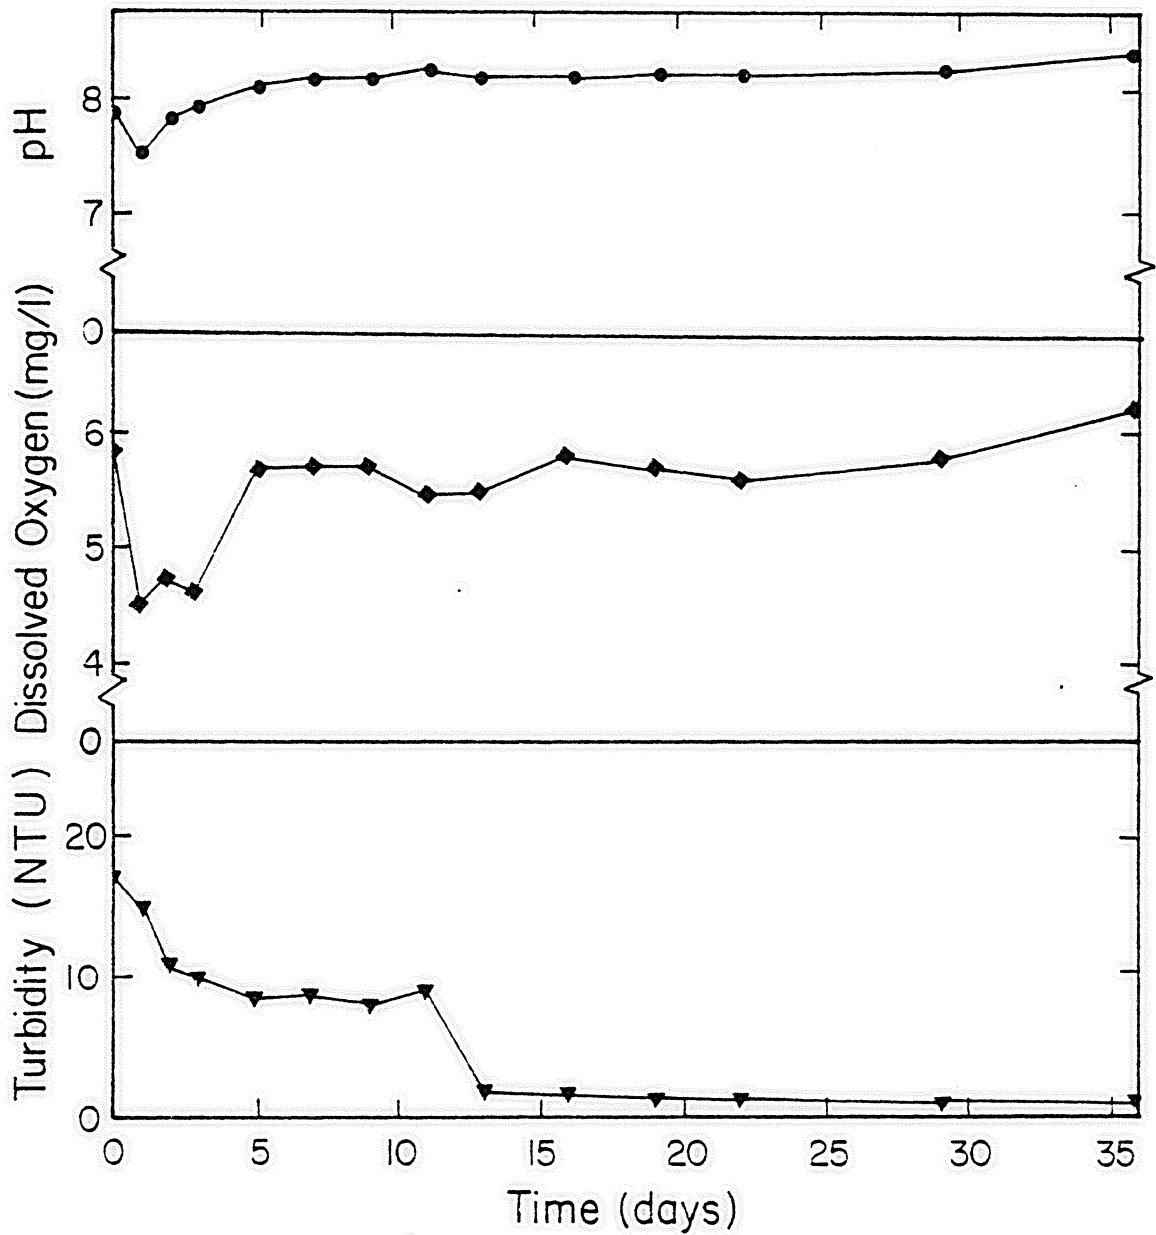


Figure 36. The variations in the turbidity, pH, and the dissolved oxygen concentrations in the water in Tank E on the sampling days of Tank Study II.

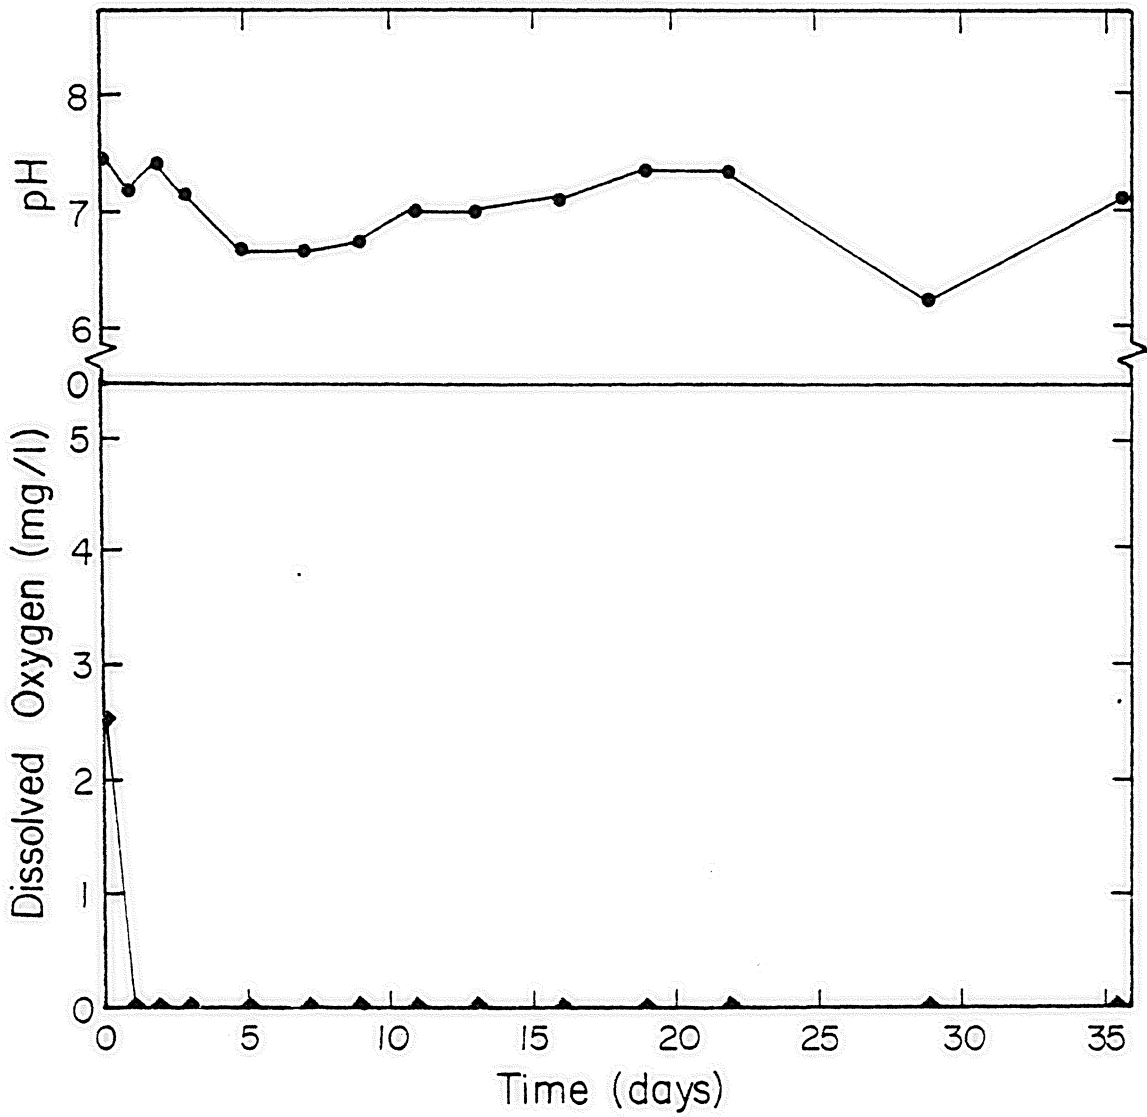


Figure 37. The variations in the pH and the dissolved oxygen concentrations of the water in Tank F on the sampling days of Tank Study II.

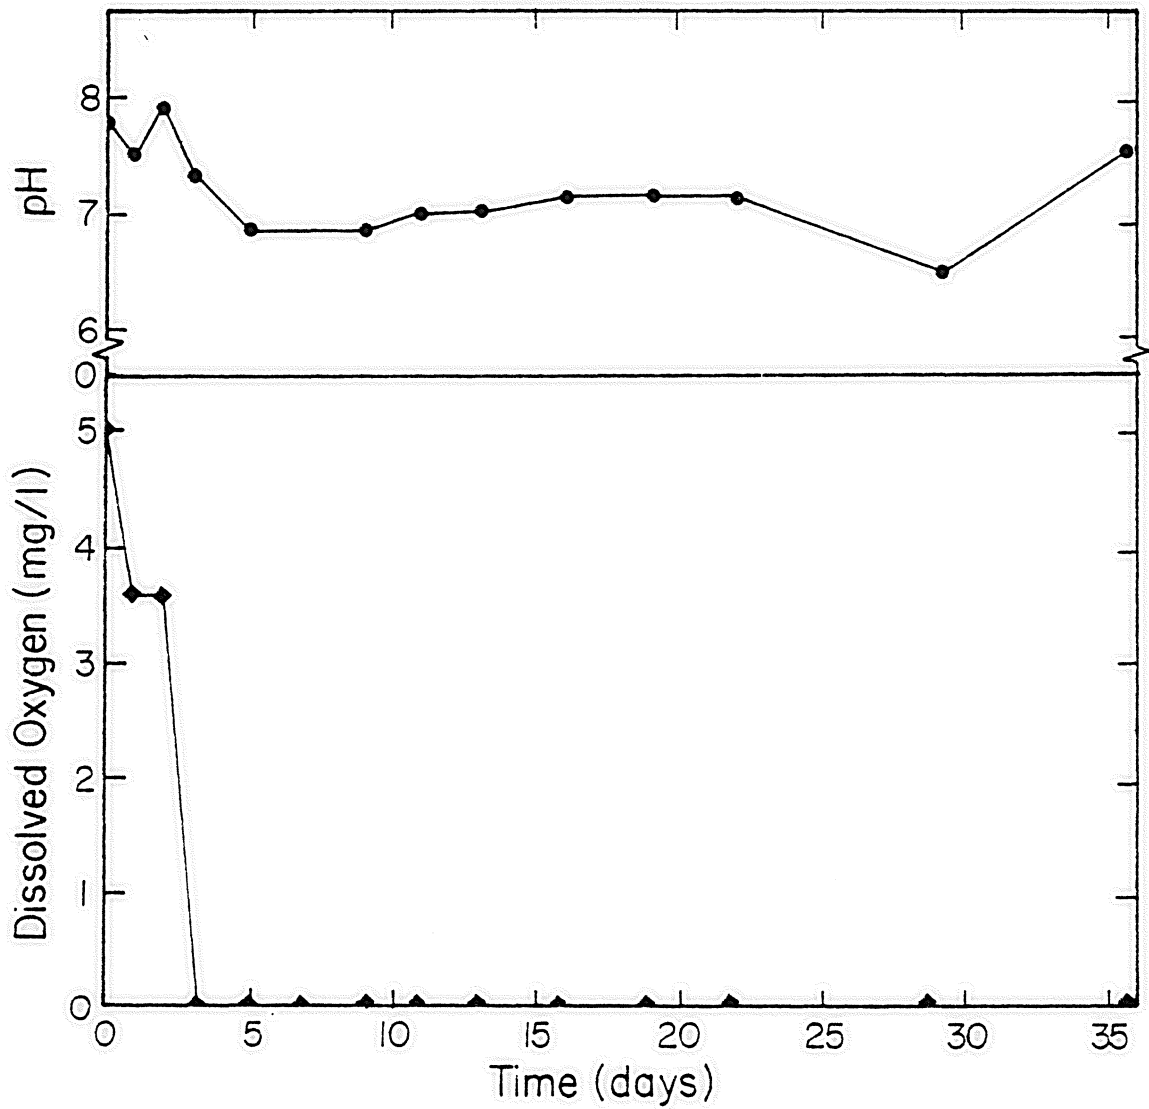


Figure 38. The variations in the pH and the dissolved oxygen concentrations of the water in Tank G on the sampling days of Tank Study II.

mg/L on Day 1. After Day 1, the D.O. concentration began to increase until it reached a constant value of approximately 5.7 mg/L on Day 5.

Tanks F and G were both intended to be anaerobic tanks and the data in Figures 37 and 38 show that this was achieved. In Tank F, the D.O. concentration decreased to below detectable limits within one day, and remained there throughout the study. The D.O. level in Tank G decreased to about 0 mg/L within three days.

Turbidity

The turbidity data for Tank D and Tank E can be found in Figures 35 and 36, respectively. The turbidity in Tank D increased from 2 NTU to .22 NTU by Day 1, decreased to 6 NTU by Day 3, then increased to 13 NTU by Day 9. By Day 11, the turbidity had decreased to a value of 2 NTU and remained at or below 2 NTU until Day 36. The initial turbidity in Tank E was 17 NTU. The turbidity decreased to approximately 10 NTU by Day 2 and remained at this point until Day 13, when it decreased to 2 NTU. From Day 13 to Day 36, the turbidity remained at or below 2 NTU.

Figures 39 and 40 contain the turbidity data for Tanks F and G, respectively. Both tanks became stratified, with respect to turbidity, after about one day. They remained stratified, with the water near the surface of the tank

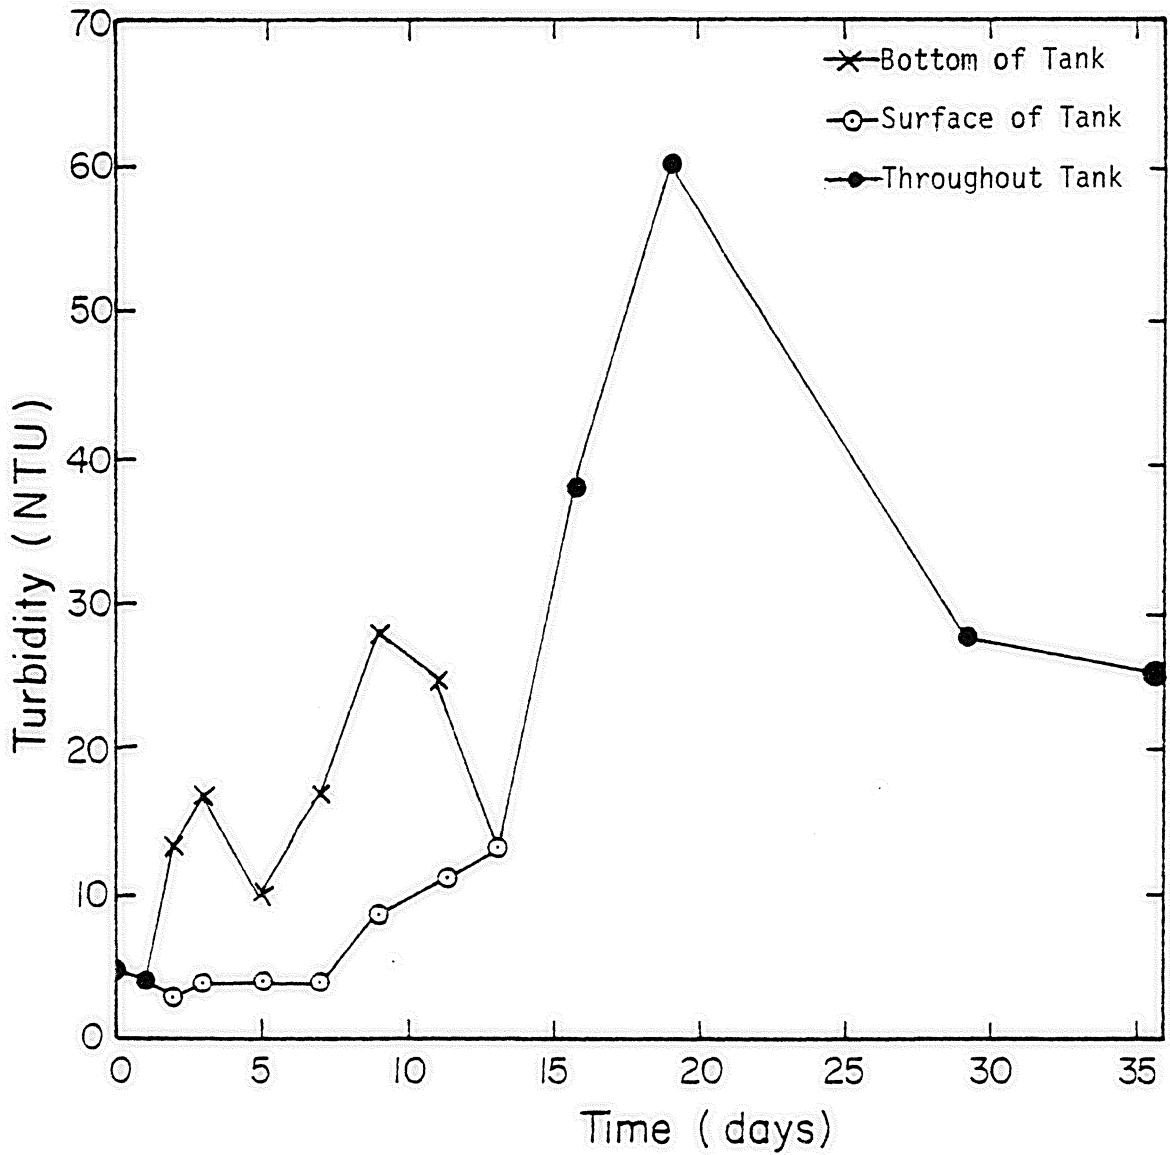


Figure 39. The variations in the turbidity of the water in Tank F on the sampling days of Tank Study II.

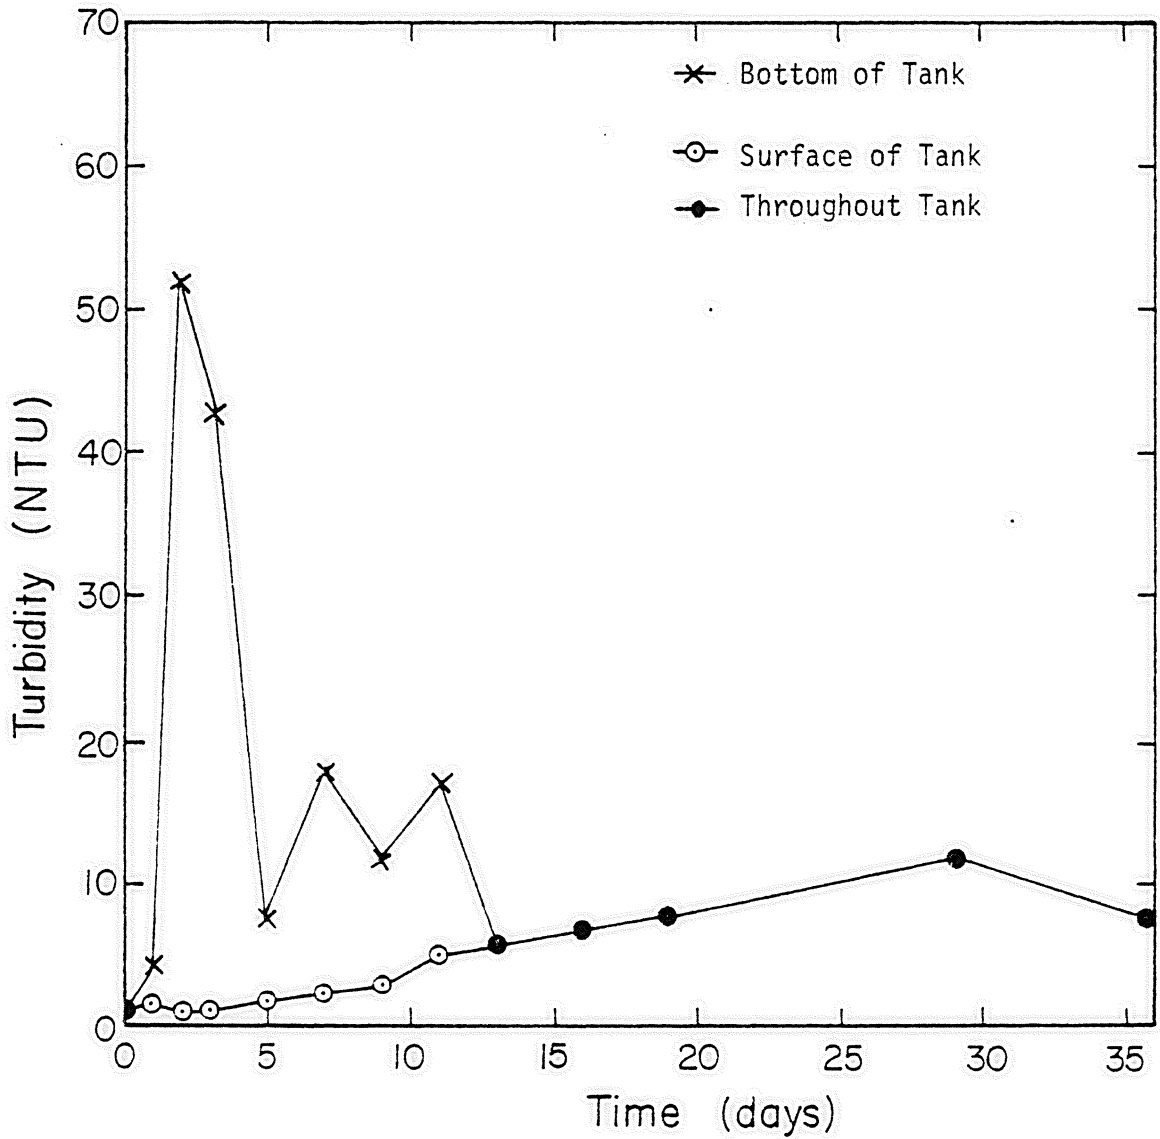


Figure 40. The variations in the turbidity of the water in Tank G on the sampling days of Tank Study II.

being less turbid than the water near the bottom of the tank, until Day 13. After destratification occurred, the turbidity increased markedly in Tank F, to a maximum of 60 NTU on Day 19 and then decreased to 24 NTU by Day 27. After Day 13, the turbidity in Tank G increased only slightly.

Oxygen Demand Study

BOD Analyses

Analysis of Scrap

An analysis of the scrap's BOD_5 was performed using both seawater and BOD dilution water as diluents. Table VII presents the data obtained when seawater was used in the analysis and Table VIII presents the data obtained when BOD dilution water was used. The average values and ranges of BOD_5 values for each diluent were similar. When seawater was used, the range of average values was 146 to 244 mg BOD_5 per g of scrap and, when dilution water was used, the range was 167 to 255 mg BOD_5 per g of scrap. It should be noted, however, that the BOD_5 exerted per gram of scrap decreased as the amount of scrap used in the analysis increased.

Analysis of Alginate

An analysis of the alginate's BOD_5 was also performed using both seawater and BOD dilution water as diluents.

Table VII. RESULTS OF THE BOD₅ ANALYSIS OF GROUND CRAB SCRAP USING SEAWATER AS THE TESTING MEDIUM

<u>Amount of Scrap Analyzed (g)</u>	<u>mg BOD₅/g of Scrap</u>	<u>Average</u>	<u>Range of Avg. Values</u>
0.1	257, 256, 219	244	146-244
0.2	225, 230, 219	225	
0.4	173, 171, 171	172	
0.5	144, 146, 148	146	

TABLE VIII. RESULTS OF THE BOD₅ ANALYSIS OF GROUND CRAB SCRAP USING BOD DILUTION WATER AS THE TESTING MEDIUM

<u>Amount of Scrap Analyzed (g)</u>	<u>mg BOD₅/g of Scrap</u>	<u>Average</u>	<u>Range of Avg. Values</u>
0.1	251, 228, 270	255	167-255
	252, 252, 278		
0.4	161, 162, 141	167	
	180, 200, 169		

Table IX presents the data obtained when seawater was used in the analysis, and Table X presents the data obtained when BOD dilution water was used. The average values and ranges for the BOD data were relatively low. It appears that the BOD_5 of the material was less than 20 mg/g.

COD Analyses

Analysis of Scrap

The analysis of the scrap's COD was performed using deionized, distilled water as the diluent. Table XI presents the data obtained in this analysis. Note that the data ranged from a high of 416 mg of COD exerted per g of scrap to a low of 349 mg. The overall average was 390 mg.

Analysis of Alginate

The analysis of the alginate's COD was performed using deionized, distilled water as the dilution medium. Table XII presents the data obtained in this analysis. Note that the data ranged from 430 mg of COD exerted per g of alginate to 403 mg. The overall average was 417 mg.

Cadmium Uptake Study

This study involved the addition of differing amounts of crab shell to a 2.0 mg/L solution of Cd in seawater.

TABLE IX. RESULTS OF THE BOD₅ ANALYSIS OF ALGINATE USING SEAWATER AS THE TESTING MEDIUM

<u>Amt of Alginate Analyzed (g/L)</u>	<u>mg BOD₅/g of Alginate</u>	<u>Average</u>	<u>Range of Average Values</u>
2.5	20, 18, 16	18	12-18
5.0	13, 13, 9	12	

TABLE X. RESULTS OF THE BOD₅ ANALYSIS OF ALGINATE USING BOD DILUTION WATER AS THE TESTING MEDIUM

<u>Amt. of Alginate Analyzed (g/L)</u>	<u>mg BOD₅/g of Alginate</u>	<u>Average</u>	<u>Range of Average Values</u>
2.5	14, 12, 12	13	8-13
5.0	9, 9, 7	8	

TABLE XI. RESULTS OF THE COD ANALYSIS OF GROUND CRAB SCRAP

<u>Amount of Scrap Analyzed (g)</u>	<u>mg COD/g of Scrap</u>	<u>Average</u>	<u>Range in Replicate Values</u>
0.05	416, 410, 413	413	
			349-416
0.10	397, 355, 349	367	

TABLE XII. RESULTS OF THE COD ANALYSIS OF ALGINATE

<u>Amt. of Alginate Analyzed (g/L)</u>	<u>mg COD/g of Alginate</u>	<u>Average</u>	<u>Range in Replicate Values</u>
0.5	424, 410, 418	422	403-430
	429, 430		
1.0	414, 408, 403	410	
	407, 416		

These solutions were sampled on Days 0, 1, 2, 4, 6, and 8, in an attempt to determine the adsorptive capacity and the rate of adsorption of Cd by the shell material.

Figures 41, 42, 43, and 44, show the percent of Cd which was removed from the solutions by the crab shell on each of the sampling dates. Note that the larger the quantity of shell material present, the greater the percent removal on Day 1. With 0.5 g of shell present, only 27 percent of the Cd was removed by Day 1, whereas when 32 g of shell was present, 90 percent of the Cd was removed by Day 1. It should also be noted that all of the systems reached equilibrium within eight days, except those which contained only 0.1 g and 0.5 g of shell.

Figure 45 shows the percent of Cd removed by the varying quantities of shell after eight days.

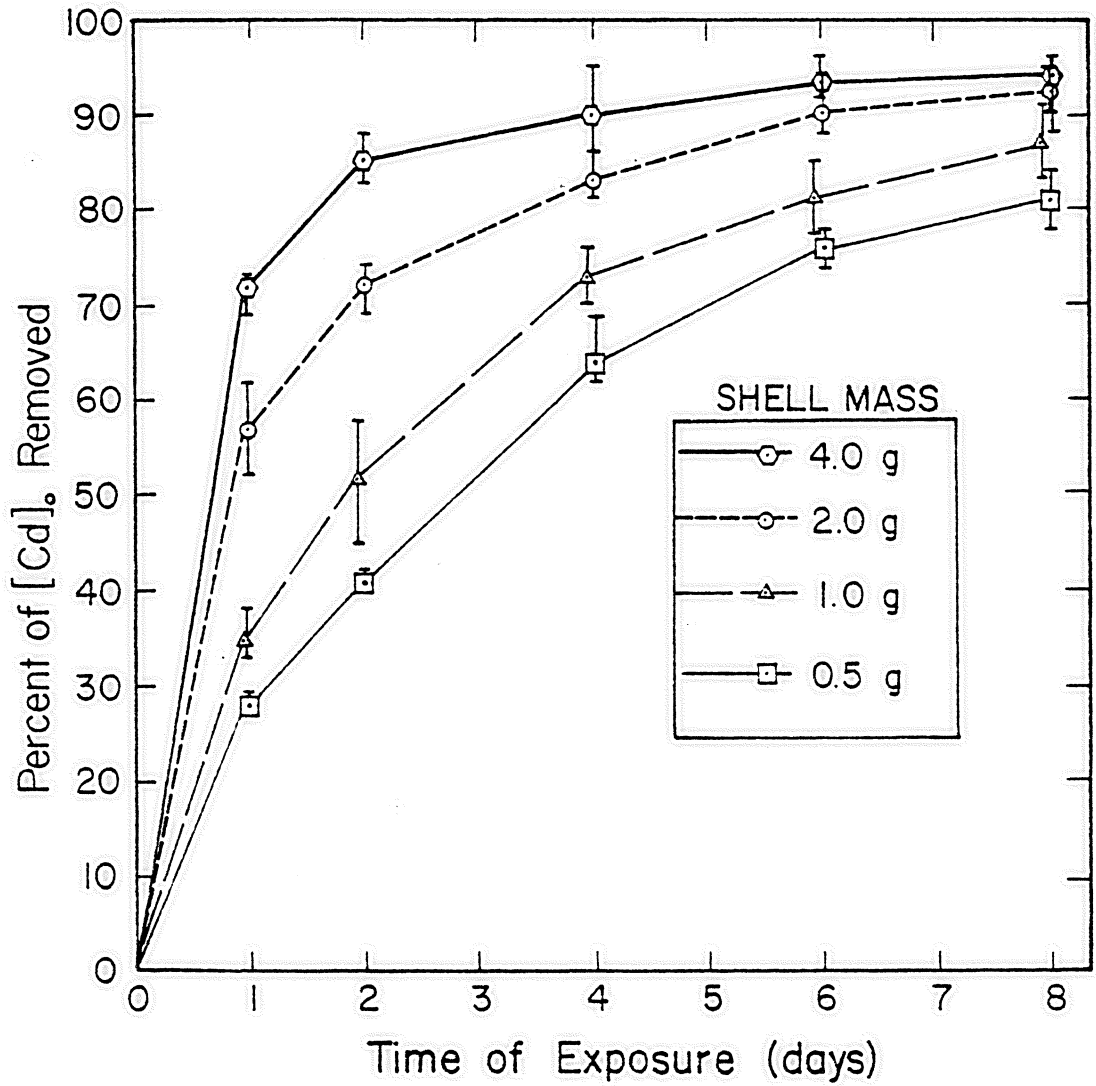


Figure 41. Uptake of Cd by crab shells over an eight day period.

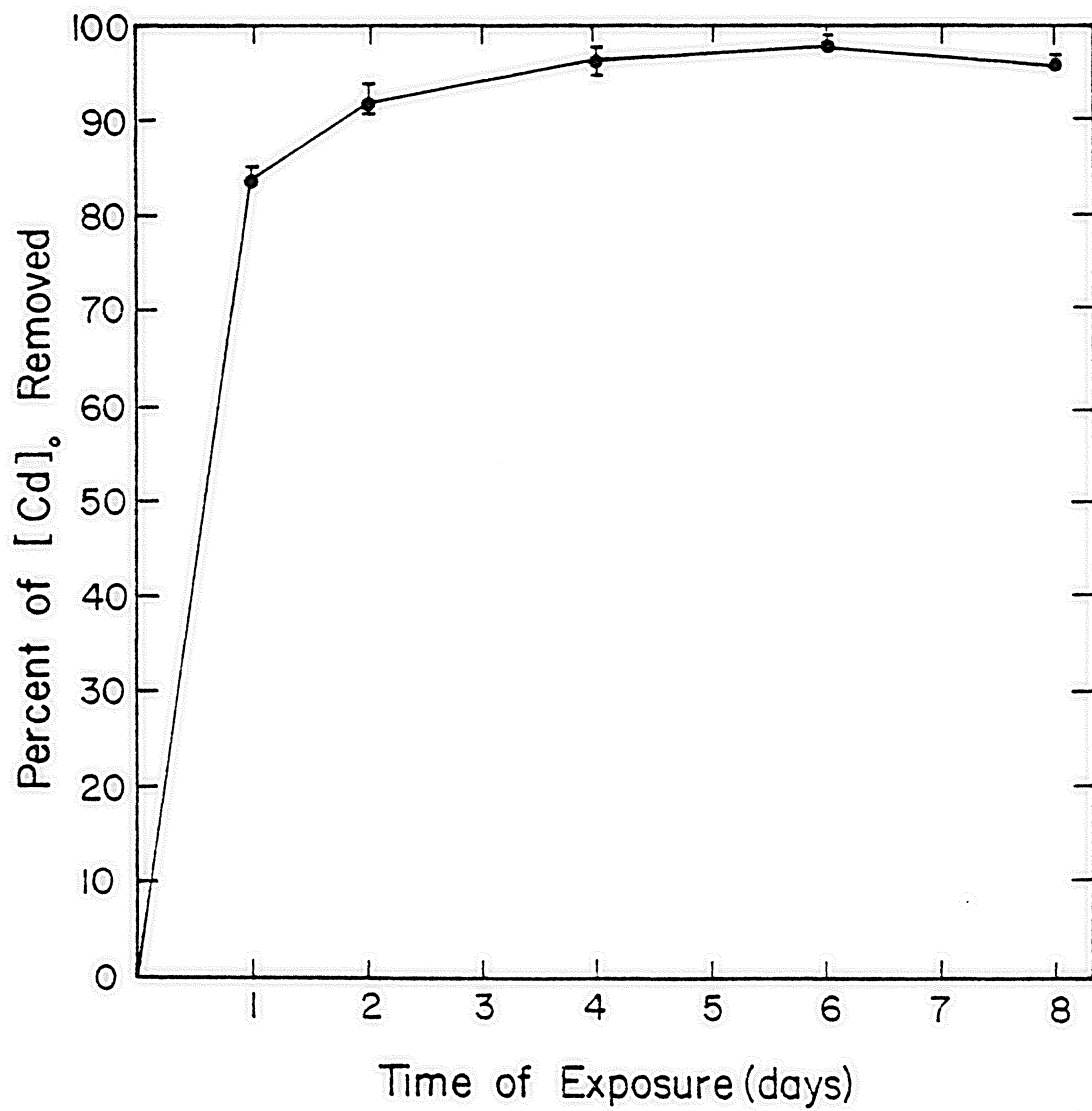


Figure 42. Uptake of Cd by 8 g of crab shell over an eight day period.

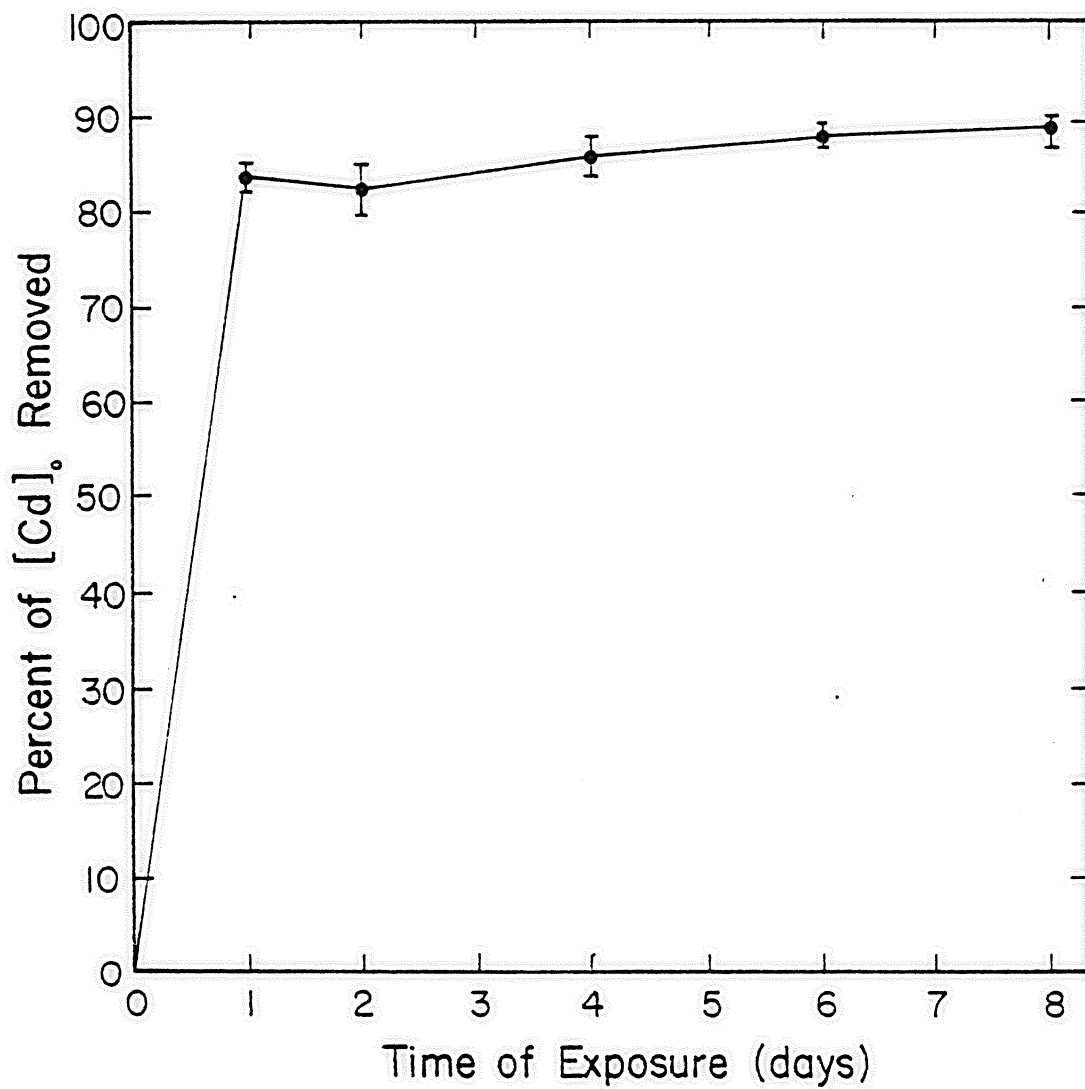


Figure 43. Uptake of Cd by 16 g of crab shell over an eight day period.

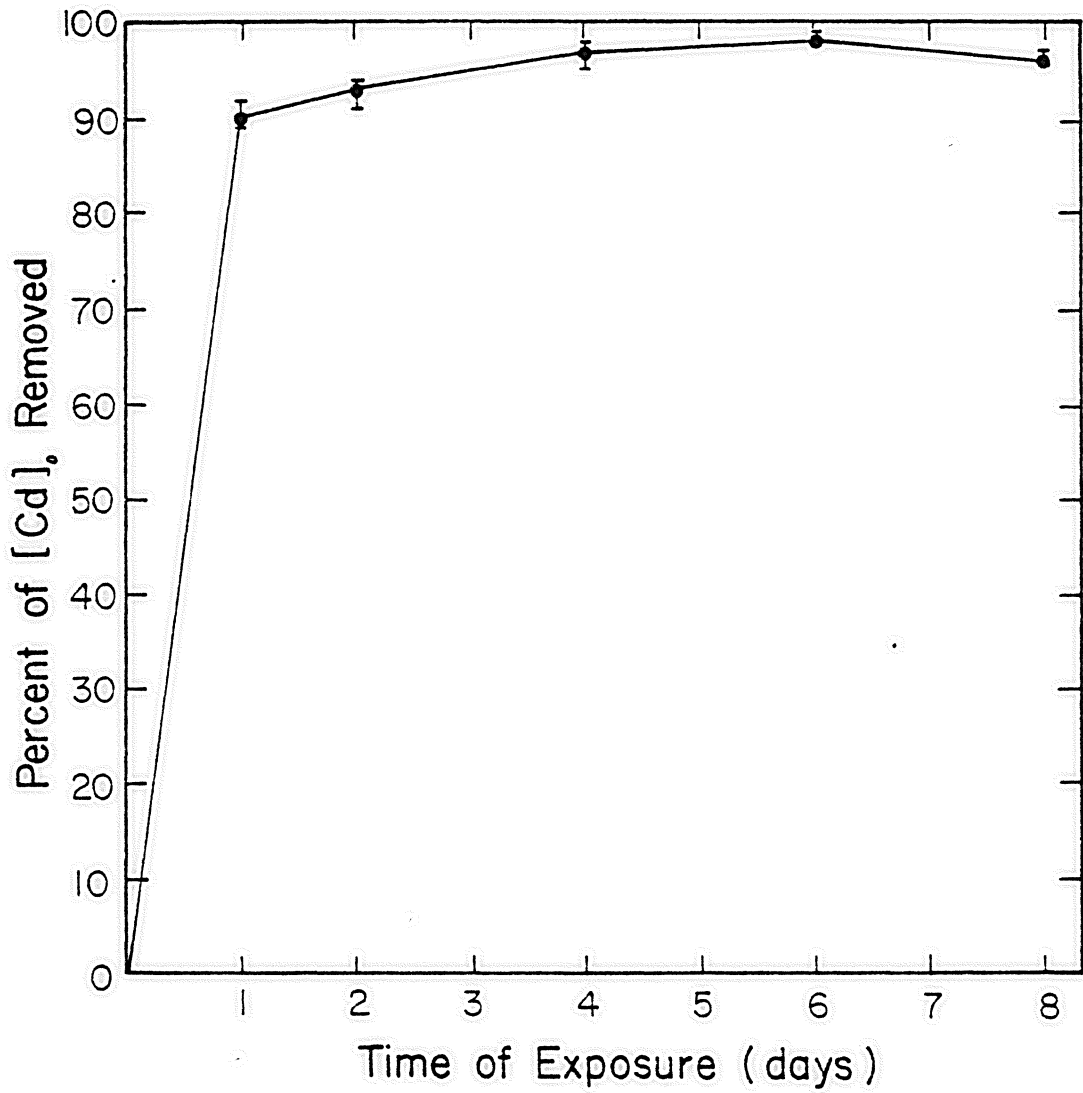


Figure 44. Uptake of Cd by 32 g of crab shell over an eight day period.

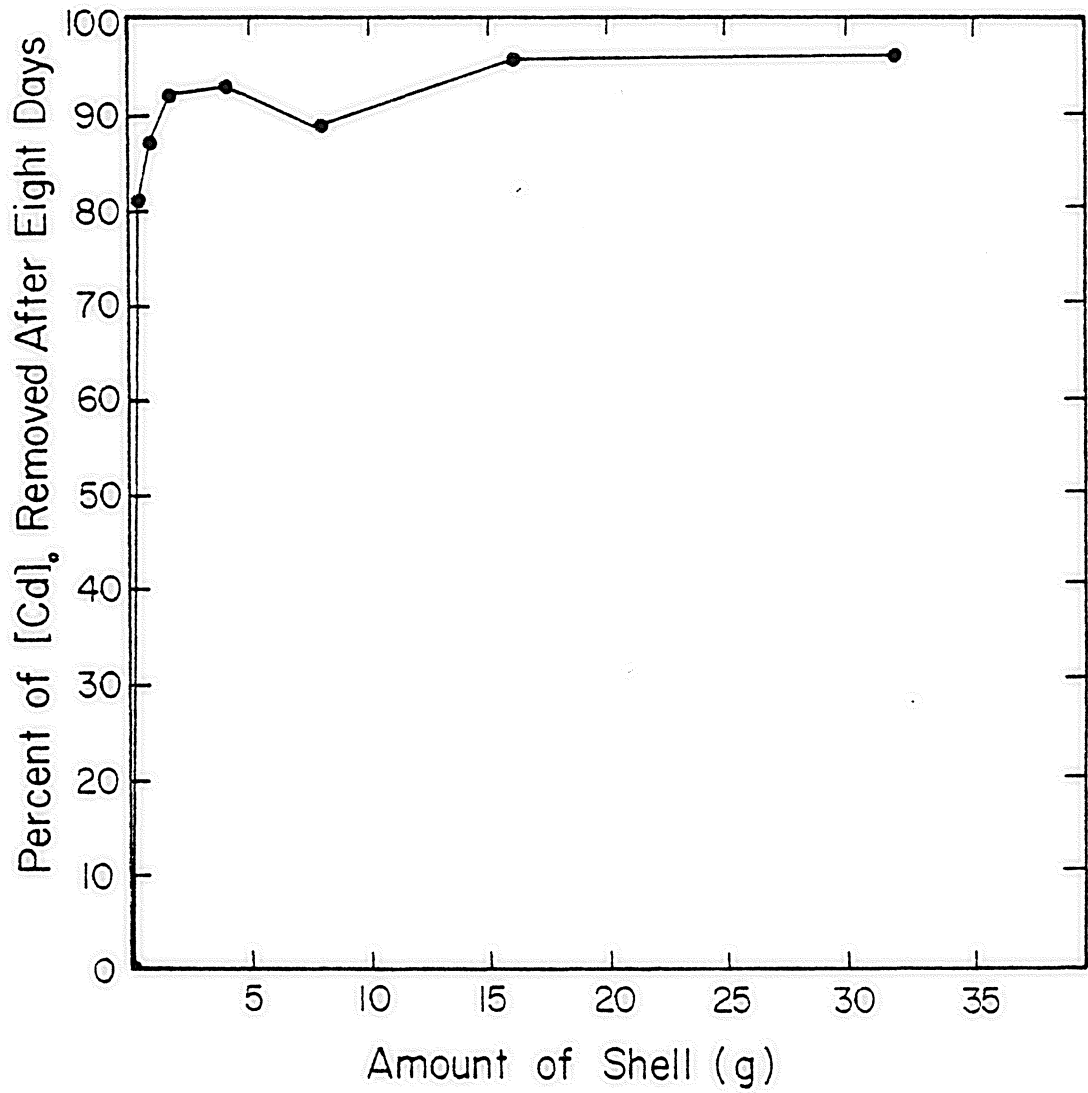


Figure 45. Levels of Cd adsorbed by various amounts of crab shell after eight days.

VI. DISCUSSION

This chapter will follow the format used in the "Results" chapter. The field studies will be discussed, followed by the tank studies, then an analysis of the oxygen demand data and, finally, the Cd uptake study. All of these areas will then be discussed jointly in an effort to relate the information to the problem of crab scrap disposal.

Field Studies

Field Study I

Because equipment was lost during this study, no specific data concerning scrap degradation were obtained. However, valuable knowledge concerning site location, containment device design and sampling techniques was gained.

It was determined that any future sites should be located in areas which experienced milder current action and less recreational traffic. The design of the containment device would need to be altered so that the scrap would be securely contained in the devices. These devices would also need to be anchored with extra weights to assure that they would remain at the sites. To assure that the sites would not be inadvertently changed during sampling, an anchorage system was designed which allowed one weight to always remain on the bottom. This knowledge was then applied

in the subsequent studies.

Field Study II

Both the coated and the uncoated scrap balls at each of the three sites degraded at similar rates, indicating that the alginate coating did not noticeably alter the degradation rate of the scrap ball.

The scrap was examined on Days 1 and 10 of this study and because no tissue was found on Day 10, it was determined that to properly define the rate of tissue loss, the scrap would have to have been examined more frequently. This problem was subsequently addressed in Field Study III.

The concentrations of Cd and Zn in the shell decreased with time. This would indicate that as the shells degraded, these metals were being released to the water and sediment. However, the impact on the water and sediment was not detected due to the relatively small contributions of Cd and Zn from the shell.

Field Study III

An approximation of the rate of tissue loss from both coated scrap balls and loose scrap was made in this study. For the coated scrap balls, six days were required for over 95 percent of the tissue contained in five, 300 g scrap balls to be lost from the containment devices. Approximately

85 percent of the loose scrap tissue, which had been attached to the shell, was lost after six days. There are several physical, biological, and chemical factors which might have affected the rate of tissue loss.

One physical factor is the tidal current. As the water flowed through the containment devices, it produced frictional forces on the exterior surfaces of the scrap. This contributed to the degradation of the coating and the scrap ball. The moving water also provided a mode of transport for the scrap particles. The scrap was also affected by a physical force which was created during each inspection. Each time a device was raised or lowered, water would be forced into or out of the container. This water created a flushing action and caused the loss of a significant portion of tissue upon each inspection.

The biological processes acting on the tissue were attributed to the organisms which were small enough to enter the containment devices, i.e., microinvertebrates, bacteria, and fungi. These organisms may have been feeding on the scrap. A new supply of organisms was constantly provided by the tidal current. Some macroinvertebrates were also found inside the containment devices. These were mainly isopods, amphipods, and marine worms.

The corrosive chemical nature of the saline water may have contributed to the degradation of the alginate coating

and the pitting seen in the whole crab shells.

Tank Studies

Tank Study I

In this portion of the work, the impact of three methods of crab scrap preparation on water quality were studied.

Raw, uncompacted scrap was used in Tank A. It was thought that this form would create the greatest impact on water quality and would be the least acceptable for offshore disposal.

The scrap in Tank B had been compacted. During the compaction process, much of the liquid in the scrap was removed. This liquid undoubtedly contained a considerable amount of organic matter and was one of the main components of the scrap responsible for the deterioration of the water quality in Tank A.

The scrap in Tank C had been both compacted and coated with an alginate gel. In this process, liquids were removed from the scrap and then the remainder of the scrap was encased in alginate. It was expected that this coating would encase the tissue and decrease the degradation rate of the scrap. Scrap in this form was expected to produce less of an impact on water quality and be the most acceptable form for offshore disposal.

The observed impact of the scrap on the water quality in each of the three tanks corresponded well with the expected impacts. Tank A exhibited concentrations of NH_3 , TOC, and BOD and turbidity that were at least four times greater than those in Tank C and twice as great as those in Tank B.

The sensory observations also provided important information concerning these three scrap forms. The odor and visual appearance of the water indicated that the water in Tank A was most severely impacted by the scrap, followed by the waters of Tank B, and then Tank C.

Floating scrap is a major concern. Tank A contained the most floating scrap and it remained afloat the longest. However, the coated scrap was buoyant when first placed in Tank C, and it follows that if this coated scrap were to be placed in a denser liquid, such as seawater, it might not sink. Also, a section of this scrap did begin to float on Day 34, due to organic decomposition and gas production within the alginate coating.

Tank Study II

In this portion of the work, the impact of alginate coated scrap on four different simulated marine environments was studied.

Tank D, which was aerated and did not contain sediment, and Tank E, which was aerated and contained sediment, behaved almost identically, which indicates that the presence or absence of sediment did not markedly affect the impact of crab scrap on a well aerated system. Tank F, which contained sediment and was not aerated, and Tank G, which did not contain sediment and was not aerated, behaved in similar manners. However, differences that were attributed to the presence of sediment were reflected in the data for turbidity, dissolved oxygen, and nitrogen-containing compounds.

There were marked differences concerning the nitrogen-containing compounds in the aerated tanks, Tanks D and E, and in the non-aerated tanks, Tanks F and G. In the aerated tanks, the conditions were favorable for the growth of nitrifying bacteria. These bacteria converted the ammonia to $\text{NO}_2^- + \text{NO}_3^-$. The nitrifying bacteria could not function in the non-aerated tanks due to the anaerobic conditions. Therefore, the ammonia levels remained high and only very small amounts of $\text{NO}_2^- + \text{NO}_3^-$ were detected.

The cycling of these nitrogen-containing compounds is extremely important because of the high organic nitrogen content of the crab scrap. If too large a quantity of scrap is deposited at one site, the ammonia levels will increase rapidly from the conversion of organic nitrogen to ammonia under aerobic or anaerobic conditions. Ammonia is

toxic to fish and the increased concentrations may result in fish kills. Also, if the disposal site is aerobic, the ammonia will be converted to $\text{NO}_2^- + \text{NO}_3^-$, consuming the available oxygen. The reduced oxygen concentration may also initiate a fish kill and severely affect other aquatic organisms.

The NH_3 and organic nitrogen concentrations were consistently higher in Tank F and in Tank G. This could be due to the presence of a larger anaerobic microbial population or due to NH_3 and organic nitrogen release from the sediment.

The $\text{NO}_2^- + \text{NO}_3^-$ concentration was lower in Tank F than in Tank G. This could be explained by the more rapid depletion of oxygen from Tank F, since oxygen is required for the conversion of NH_3 to $\text{NO}_2^- + \text{NO}_3^-$. The $\text{NO}_2^- + \text{NO}_3^-$ concentration noted in these tanks on Day 36 indicates that the carbonaceous BOD had decreased to the point that oxygen was then available to satisfy part of the nitrogenous BOD.

The turbidity in Tank F was greater than in Tank G, except on Days 2 and 3. This could be explained by the fact that, with sediment, there would be a larger and more stable anaerobic microbial population in Tank F than in Tank G. This population would tend to cause an increase in the turbidity due to the increased numbers of organisms in the water column.

The graphs of D.O. versus time show that the sediment exhibited a strong oxygen demand. Tank F was anaerobic

after one day, whereas Tank G remained aerobic until Day 3.

The sensory observations supported and expanded the analytical data. It was noted that in all the tanks the alginate coating had sloughed off of the scrap balls within four hours. This indicated that the alginate coating lost its integrity rapidly in the saline water.

All of the tissue seemed to have disappeared from Tank D and Tank E by Day 11. This observation supports the analytical data which indicated a marked improvement in the water quality of these tanks after Day 11.

Oxygen Demand Study

BOD Analyses

The BOD_5 of the scrap varied from 141 to 278 mg per g of scrap. The actual value obtained for any given analysis was dependent upon the amount of scrap analyzed. The less scrap analyzed, the higher and the more variable the BOD_5 values. The higher values could have been due to the fact that the larger samples seemed to have a higher shell-to-tissue ratio and therefore would exert less BOD. The greater variability could be attributed to the inaccuracy of both the BOD_5 testing procedure, the weighing of such small amounts of scrap, or some inhibitory agent present in the scrap, such as heavy metals.

The BOD_5 of the alginate varied from 7 to 20 mg of BOD_5 per g of alginate. The variability noted in this analysis can be contributed to the variability which is inherent to the BOD_5 test. In comparing the results of the analyses using seawater with the analyses using BOD dilution water, it was found that there were no major differences between the two methods.

COD Analyses

The COD of the scrap varied from 349 to 416 mg of COD per g of scrap. This variation was also thought to be attributable to fluctuations in the shell-to-tissue ratio which was seen in samples that differed in size.

The COD of the alginate varied from 403 to 430 mg of COD per g of scrap. This is quite similar to the COD of the scrap.

The BOD_5 and COD of the scrap were reported in ranges to take into account the variability in the shell-to-tissue of crab scrap. This shell-to-tissue ratio of the scrap is dependent on the season of the year, the area which it is from, and the picking process used. If the scrap is from an area having water of a higher salinity, the crab scrap produced in the spring will possess a much lower shell-to-tissue ratio. This is due to the fact that the female requires higher salinity waters to properly develop her egg

masses and these are developed in the spring (2). These egg masses are discarded with the scrap which, in turn, lowers the shell-to-tissue ratio. The crab picking process that is used can also affect the shell-to-tissue ratio of the scrap. Crab picking can be either hand picking of the entire crab or mechanical picking of just the crab claw. Hand picking is usually the most efficient and produces the largest shell-to-tissue ratio. Thus, due to the high variability of crab scrap, no one COD or BOD₅ value can be assigned to it.

Cadmium Uptake Study

The purpose of this study was to determine if the shell material in the crab scrap would adsorb Cd. The data indicated that crab shell is an excellent adsorbent for Cd.

The maximum amount of Cd adsorbed per g of shell was 0.564 mg. This was observed in a batch reactor which contained only 0.5 g of shell and 2 mg/L of Cd. The 0.564 mg of Cd was adsorbed by Day 8. However, this value probably underestimates the adsorptive capacity of the shell because equilibrium had not been reached by the time the sample was sacrificed.

In the batch reactors which contained more than 2.0 g of shell, each system reached equilibrium by Day 6. In all of these reactors, except the one containing 8.0 g of shell,

equilibrium was reached after 90 percent of the available Cd had been removed from the solution. The maximum percentage removal was 98 percent, and this efficiency was observed in both the batch reactor containing 16.0 g of shell and the one containing 32.0 g of shell.

In the three batch reactors which attained equilibrium (4.0 g, 16.0 g, and 32.0 g of shell), the amount of Cd remaining in the solution at equilibrium ranged from 0.011 mg and 0.019 mg, which was equivalent to 0.07 mg/L to 0.13 mg/L.

Recommended Disposal Procedure

After investigating the individual areas of concern, the entire offshore disposal procedure must be considered. In order to accomplish this, a proposed disposal procedure is outlined below and the reasoning behind each step is given.

After the crabs are picked, it is recommended that the scrap be ground into pieces smaller than 0.6 cm^2 . This grinding process reduces the volume of the scrap by approximately a factor of five and therefore makes the scrap easier to transport to the disposal site.

Following the grinding process, the scrap should be allowed to fall from the grinder into sealable containers for transport. The scrap must be sealed in some way during transport to reduce the odor associated with the scrap. It

is suggested that an alginate gel be used for sealing the surface of the scrap in the reusable container before the lid is put in place. This reusable container could then be hoisted onto a boat or barge and taken to the disposal site where the contents would be dumped.

After dumping, it is expected that the ground crab scrap would sink. As the ground scrap sinks through the water, some of the less dense particles of tissue would be transported from the disposal site by the currents, while the more dense particles of shell would sink to the bottom. This dispersion of tissue would decrease the amount of BOD and COD exerted at the disposal site. The amount of tissue dispersed and, thus, the decrease in BOD and COD realized would be directly proportional to the velocity of the current at the disposal site.

Care must be taken throughout this disposal procedure to assure that the crab scrap does not become contaminated with Cd. The shell in the scrap readily adsorbs Cd and could release it as the shell degraded in the aquatic environment. If contamination, uptake, and release of Cd occurred, the ecosystem at the disposal site could be severely impacted.

Proper management of the offshore disposal system is the key factor to its environmental success. The scrap preparation process must be carefully controlled. The dis-

posals sites must be properly chosen considering the current velocity, depth, mixing action, and D.O. concentrations. Proper rates of scrap application must be assigned to each disposal site to prevent deterioration of the ecosystem. Careful monitoring of the disposal process and water quality at the disposal sites is required. If these proper management procedures are instituted, it would appear that crab scraps may be disposed of at sea.

VI. SUMMARY AND CONCLUSIONS

Among the problems associated with the offshore disposal of crab scrap are the odor, volume, and handleability of the waste, the presence of floating matter at the disposal site, and the impact of the waste on water quality. Crab scraps exert a relatively high oxygen demand, release ammonia and oxidized nitrogen during decomposition, and have a high affinity for heavy metals.

After identifying these problems, a means of handling the crab scrap had to be developed which would minimize these problems. Compaction of the crab scrap was thought to be a possible means of reducing the volume, however, following this work it is felt that the costs of compacting the wastes under high pressures outweigh the benefits derived. These costs include the high capital cost of the equipment, the high energy costs for operation of the equipment, and the cost of sewerage or pretreating the high BOD liquid waste.

Another method for reducing the crab scrap volume was therefore considered and consisted of grinding the scrap. Grinding reduced the volume by a factor of five and eliminated the problem of floating scrap. The ground crab scrap could be deposited directly in a reusable container and sealed with an alginate gel to reduce odor and then trans-

ported to the disposal site. The alginate was found to have a low BOD₅ and would therefore, probably not increase the oxygen demand at the disposal site.

The ground crab scrap would produce a less severe impact on the water quality than would whole scrap. This is because, as the ground scrap sinks through the water, some of the less dense particles of tissue would be transported from the disposal site by the currents. The dispersion of tissue would decrease the amount of ammonia and oxidized nitrogen produced and the amount of BOD exerted at the disposal site, thus reducing the impact of the scrap on the water quality.

In conclusion, the following statements can be made:

1. Several potential water quality problems are associated with the offshore disposal of crab scrap. They are the shell materials affinity for heavy metals, the high oxygen demand exerted by the scrap, and the production of potentially toxic amounts of ammonia and oxidized nitrogen.
2. The grinding of the crab scrap reduced the volume and eliminated the problem of floating scrap.
3. The alginate gel used to seal the scrap and prevent odor problems did not add appreciably to the short term oxygen demand of the crab scrap.
4. The alginate gel coating did not appreciably delay

the degradation of the ground scrap because the alginate coating lost its integrity and was readily dispersed in the saline environment.

It is therefore believed that crab scraps may be disposed of in marine environments provided that appropriate disposal sites are selected and properly managed, i.e., careful monitoring of disposal techniques and water quality at the disposal sites.

VII. RECOMMENDATIONS

This research has answered many of the questions concerning the impact of crab scrap on an aquatic environment. However, as in any research, more questions were raised. These questions should be addressed through further research and the author wishes to recommend the following:

1. Further study into the metals adsorption capacity of crab shells.
2. Investigation of the effect of accumulated crab shell on benthic organisms.
3. Development of a computer model to assist in selection of crab scrap disposal sites.
4. A field study prior to, during, and following a large-scale dumping of ground crab scrap at a disposal site.

VIII. REFERENCES

1. Conley, Weston, Personal Communication, RCV Seafood, Incorporated, Morratico, Virginia (1982).
2. Warner, William W., Beautiful Swimmers. Penquin Books, New York, N.Y., 304 p. (1977).
3. Murray, Thomas J., "Seafood Waste Management in Virginia." Seafood Waste Management in the 1980's: Conference Proceedings, Orlando, Florida, Florida Sea Grant College, Report Number 40, pp. 3-10 (1981).
5. Titus, Terry C., "Seafood Waste Management in South Carolina." Seafood Waste Management in the 1980's: Conference Proceedings, Orlando, Florida, Florida Sea Grant College, Report Number 40, pp. 26-33 (1981).
6. Miles, George, "Report from the Landfill." Crab By-products and Scrap 1980: A Proceedings. Edited by Mary Beth Hatem, University of Maryland Sea Grant (1981).
7. Ohlandt, John, Personal Communication, South Carolina Department of Health and Environmental Control, Office of Environmental Quality Control, Solid Waste Division, Charleston, South Carolina (1982).
8. Champ, Michael A., O'Connor, Thomas P., Park, P. Kilho, "Ocean Dumping of Seafood Wastes as a Waste Management Alternative." Seafood Waste Management in the 1980's: Conference Proceedings, Orlando, Florida Sea Grant College, Report Number 40, pp 103-116 (1981).
9. United States Environmental Protection Agency, Report to Congress, "Section 74 Seafood Processing Study- Executive Summary." Washington, D. C. (1980).
10. Warner, G. F., The Biology of Crabs. Elek Science, London, (1977).
11. Standard Methods for the Examination of Water and Wastewater. 15th edition, edited by APHA, AWWA, and WPCF. New York, N.Y. (1980).

12. Siegel, R. S., "Determination of Nitrate and Exchangeable Ammonia in soil extracts by an Ammonia Electrode." Soil Science Society of America Journal, 44, pp. 943-947 (1980).
13. "Hach Manometric BOD Apparatus Manual", Procedures Manual, Hach Chemical Company.

APPENDIX A
PROCEDURES

HACH MANOMETRIC BOD APPARATUS

Principle of Operation

A measured amount of crab scrap is placed in one of the bottles, to which dilution water has been added. The bottle is then placed on the stirring apparatus and connected to a closed end mercury manometer. Above the crab scrap solution is a quantity of air which contains 21 percent oxygen (13). Over a period of time, bacteria in the solution utilize oxygen to oxidize organic matter present in the crab scrap, and thus dissolved oxygen is consumed from the sample. The air in the closed sample bottle replenishes the utilized oxygen which results in a drop in air pressure in the sample bottle (13). The pressure drop is registered on the mercury manometer which can be read directly as mg/L BOD. The sample is continually agitated during the test period by a magnetic stirring bar. Carbon dioxide is produced by the oxidation of organic matter and must be removed from the system in order that it does not develop a positive gas pressure that would result in an error. This is accomplished by placing a cup with potassium hydroxide into the sample bottle, being sure that it does not come in direct contact with the sample (13).

APPENDIX B
EXPERIMENTAL DATA

TABLE A-1. WATER QUALITY DATA FOR THE FIRST SIX DAYS OF TANK STUDY I

	All Tanks	Day 1 Tank			Day 2 Tank			Day 3 Tank			Day 4 Tank			Day 5 Tank			Day 6 Tank		
		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Organic N (mg/L as N)	3.0	-	-	-	21	1.7	1.0	14	2.2	1.4	19	4.8	1.0	24	1.7	1.0	-	-	-
NH ₃ (mg/L as N)	1.0	5.5	3.6	<1.0	8.9	4.4	2.3	11	4.4	2.1	22	13	5.3	33	19	6.8	29	19	6.4
D.O. (mg/L)	8.2	6.2	7.6	8.0	7.6	8.1	8.2	8.2	8.4	8.4	8.1	8.4	8.0	8.2	8.1	8.1	7.8	8.1	8.1
Temperature (°C)	23	23	23	23	22	22	22	22	22	22	23	23	23	21	21	21	21	21	21
Turbidity (NTU)	0.4	17	5.0	1.8	22	9.2	3.8	18.5	7.5	3.6	22	15	5.6	30	12	6.3	33	13	6.5
pH	7.0	7.0	7.0	7.0	6.9	5.5	6.5	7.5	7.7	7.6	7.2	7.5	7.6	7.5	7.6	7.6	7.7	7.9	7.7
TOC (mg/L)	1.3	42	19	9	20	14	6	19	13	6	21	15	5	22	28	5	25	17	5
BOD ₅ (mg/L)	12	84	36	<12	53	23	<12	46	27	<12	130	34	<12	41	28	<12	75	35	<12

TABLE A-2. WATER QUALITY DATA FOR THE FIRST SIX DAYS OF TANK STUDY II

DAYS	TANK D			TANK E			TANK F			TANK G		
	Reported in mg/L as N			Reported in mg/L as N			Reported in mg/L as N			Reported in mg/L as N		
	NH ₃	NO ₂ ⁻ + NO ₃ ⁻	Org.N	NH ₃	NO ₂ ⁻ + NO ₃ ⁻	Org.N	NH ₃	NO ₂ ⁻ + NO ₃ ⁻	Org.N	NH ₃	NO ₂ ⁻ + NO ₃ ⁻	Org.N
0	<1	<1	<4	<1	<1	<4	<1	<1	<4	<1	<1	<4
1	22	2	2	13.5	3	<4	2	<1	<4	7.6	<1	<4
2	25	<1	4.5	23	<1	18	26	<1	26	25	<1	12.5
3	33	<1	4.8	31	<1	5.7	15	<1	<4	19	<1	8
5	45	<1	<4	41	<1	4	19	<1	8	5.8	<1	<4
7	62	<1	-	57	3	-	37	2	4.6	19	2	-
9	59	9	<4	61	3	<4	40	2	11	24	4	<4
11	37	5	3.3	55	<1	7.5	52	<1	11.8	24	<1	2.9
13	13	20	2.1	40	12	<4	52	<1	6.3	27	<1	2.7
16	<1	29	<4	13.5	23.5	<4	51	<1	10	31	<1	6
19	<1	17	<4	<1	17	<4	61	<1	<4	50	<1	<4
22	<1	27	<4	<1	25	<4	63	<1	1.8	53	<1	4.8
27	<1	22	<4	<1	14	<4	64	<1	3.2	56	<1	8.3
36	<1	33	<4	<1	13	<4	62	6	1.7	63	9	2.9

TABLE A-2, CONTINUED

Days	TANK D			TANK E			TANK F			TANK G		
	TOC (mg/L)	Temperature (°C)	D.O. (mg/L)	TOC (mg/L)	Temperature (°C)	D.O. (mg/L)	TOC (mg/L)	Temperature (°C)	D.O. (mg/L)	TOC (mg/L)	Temperature (°C)	D.O. (mg/L)
0	10	26	6.0	10	26	5.8	10	26	2.6	10	26	5.0
1	30	26	4.5	20	26	4.4	17	26	1.0	10	26	3.6
2	26	25	4.9	32	25	4.8	15	25	1.0	79	24.5	3.6
3	28	26	5.3	22	26	4.6	77	26	1.0	13	26	1.0
5	28	25	5.3	26	25	5.6	49	25	1.0	12	25	1.0
7	28	26	5.1	26	27	5.4	24	26.5	1.0	39	26	1.0
9	27	27	5.6	21	27	5.6	24	27	1.0	53	27	1.0
11	20	27	5.5	20	27	5.5	27	26	1.0	27	26	1.0
13	17	27	5.4	14	27	5.1	13	27	1.0	20	26	1.0
16	16	27	5.5	14	27	5.5	27	27	1.0	19	27	1.0
19	16	26	5.8	13	26	5.8	25	26	1.0	17	26	1.0
22	16	27	5.7	13	27	5.7	21	27	1.0	25	27	1.0
27	15	27	5.8	21	27	5.6	17	27	1.0	19	27	1.0
36	17	27	6.2	17	27	6.2	17	27	1.0	17	27	1.0

TABLE A-2, CONTINUED

DAYS	TANK D		TANK E		TANK F			TANK G		
	pH	Turbidity (NTU)	pH	Turbidity (NTU)	pH	Turbidity (NTU) Surface Bottom		pH	Turbidity (NTU) Surface Bottom	
0	7.8	1.2	7.9	17	7.5	5.0	5.0	7.8	0.9	0.9
1	7.5	21	7.4	15	7.2	4.4	4.4	7.5	1.7	4.7
2	7.9	15	7.8	11	7.4	3.1	13	7.9	1.1	52
3	7.9	5.5	7.9	10	7.1	3.9	17	7.4	1.1	43
5	8.1	8.0	8.1	8.4	6.7	3.7	10	6.9	1.5	7.4
7	8.1	8.5	8.2	8.5	6.7	3.7	17	6.9	2.0	18
9	8.0	13	8.2	8.0	6.8	8.4	28	6.9	2.6	12
11	7.7	1.5	8.3	9.5	7.0		25	7.0	5.0	17
13	7.8	1.7	8.2	2.2	7.0		13	7.0		6.0
16	8.0	1.4	8.2	1.7	7.1		40	7.1		6.7
19	8.2	1.0	8.2	1.3	7.3		60	7.1		7.5
22	8.3	0.7	8.3	0.8	7.3		-	7.1		-
29	8.4	0.5	8.3	0.5	6.3		29	6.5		12
36	8.3	0.4	8.4	0.7	7.1		26	7.6		10

**The two page vita has been
removed from the scanned
document. Page 1 of 2**

**The two page vita has been
removed from the scanned
document. Page 2 of 2**

EFFECTS OF CRAB SCRAPS ON MARINE ENVIRONMENTS

by

Teresa Anne Kramer

(ABSTRACT)

The disposal of crab processing wastes has become a major problem in the coastal areas of Virginia and Maryland. In addressing this problem, the crab processors have considered several different crab scrap disposal techniques. One of these techniques was the offshore disposal of the crab scrap. The objective of this study was to evaluate the problems associated with this disposal technique and to develop a means of handling the crab scrap which would minimize these problems.

The scrap was found to exert a high BOD_5 , in the range of 146 to 255 mg/g, and a high COD, in the range of 349 to 416 mg/g. In addition, rather high levels of ammonia and oxidized nitrogen were produced during the decomposition of the scrap. Also, the shell material in the scrap was found to have a high affinity for cadmium present in the marine environment.

The results therefore indicated that if improperly managed, the offshore dumping of crab scrap could cause severe water quality problems. However, if disposal sites

were properly selected and regulated, it appears that offshore disposal of crab scrap could be an environmentally sound disposal option. The recommended handling procedure involves the grinding of the scrap to reduce the volume and the sealing of the scrap with an alginate gel to reduce odor problems.